

# Seventh Semester B.E. Degree Examination, Dec.2018/Jan.2019 Design of RCC and Steel Structures

Time: 3 hrs.

Max. Marks: 80

### Note: 1. Answer any TWO full questions, choosing one full question from each module. 2. Use of IS-456, IS-800 SP (6) and Steel tables are permitted.

## Module-1


Design a slabtype rectangular combined footing for two columns of size  $300 \text{mm} \times 450 \text{mm}$ and  $300 \text{mm} \times 600 \text{mm}$ , subjected to axial loads of 650 kN and 900 kN respectively. The columns are spaced at 3.6 m c/c. The width of the footing is restricted to 1.8 m. Use M20 grade concrete and Fe415 grade steel. Assume SBC of soil =  $160 \text{ kN/m}^2$ . (40 Marks)

#### OR

Design a Cantilever retaining wall to retain an earth embankment with a horizontal top 3.50 m above ground level. The unit weight of back fill is 18 kN/m<sup>3</sup>. Angle of internal friction  $\phi = 30^{\circ}$ . SBC of soil = 180 kN/m<sup>2</sup>. Take coefficient of friction between soil and concrete = 0.55. Adopt M20 grade concrete and Fe415 grade steel. Depth of foundation = 1.0 m. (40 Marks)

#### Module-2

Design a roof truss shown in Fig. Q3 with forces in each member of the truss are given in table Q3. The size of RC column supporting the truss is 300mm × 300mm. Use M20 grade concrete for column. Design the truss using bolt of M16, property class 4.6 for connections and also design anchor bolts. (40 Marks)

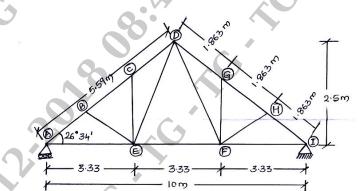

| Fig. Q3                  |                    |         |
|--------------------------|--------------------|---------|
| Member                   | Design force in kN |         |
|                          | Compression        | Tension |
| Top chord member         | 54.25              | -       |
| Bottom chord member      | -                  | 48.31   |
| Diagonal member (DF, DE) | 14.35              | -       |
| Member BE, HF            | -                  | 24.50   |
| Member CE, GF            | 12.40              | -       |

3

~

1

2

- Design a simply supported crane gantry girder for the following data: The crane is electrically operated. Yield stress of steel is 250 N/mm<sup>2</sup>.
  - (i) Span of Crane girder = 20 m

4

- (ii) Effective span of gantry girder = 7.4 m
- (iii) Capacity of crane = 220 kN.
- (iv) Self weight of Crane girder excluding crab = 200 kN.
- (v) Weight of Crab = 60 kN.
- (vi) Wheel base distance = 3.4 m
- (vii) Minimum hook approach = 1.2 m.
- (viii) Self weight of rail = 300 N/m
- (ix) Height of rail = 75 mm

Gantry girder is to be supported on RCC column bracket of size 300mm × 450mm . Size of column 300mm × 600mm . (40 Marks)