

MODULE-1

- Fluids & Their Properties
- Fluid Pressure and Its Measurements

by

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka State

Module -1: Fluids & Their Properties :


Concept of fluid, Systems of units. Properties of fluid; Mass density, Specific weight, Specific gravity, Specific volume, Viscosity, Cohesion, Adhesion, Surface tension & Capillarity. Fluid as a continuum, Newton's law of viscosity (theory & problems). Capillary rise in a vertical tube and between two plane surfaces (theory & problems). Vapor pressure of liquid, compressibility and bulk modulus, capillarity, surface tension, pressure inside a water droplet, pressure inside a soap bubble and liquid jet. Numerical problems

1.0 INTRODUCTION: In general matter can be distinguished by the physical forms known as solid, liquid, and gas. The liquid and gaseous phases are usually combined and given a common name of fluid. Solids differ from fluids on account of their molecular structure (spacing of molecules and ease with which they can move). The intermolecular forces are large in a solid, smaller in a liquid and extremely small in gas.

Fluid mechanics is the study of fluids at rest or in motion. It has traditionally been applied in such area as the design of pumps, compressor, design of dam and canal, design of piping and ducting in chemical plants, the aerodynamics of airplanes and automobiles. In recent years fluid mechanics is truly a 'high-tech' discipline and many exciting areas have been developed like the aerodynamics of multistory buildings, fluid mechanics of atmosphere, sports, and micro fluids.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

1.1 DEFINITION OF FLUID: A *fluid* is a substance which deforms continuously under the action of shearing forces, however small they may be. Conversely, it follows that: If a fluid is at rest, there can be no shearing forces acting and, therefore, all forces in the fluid must be perpendicular to the planes upon which they act.

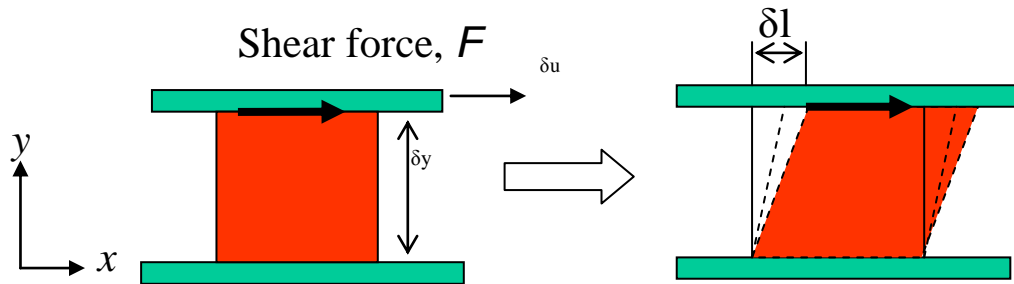

Fluid deforms continuously under the action of a shear force

$$\tau_{yx} = \frac{dF_x}{dA_y} = f(\text{Deformation Rate})$$

Shear stress in a moving fluid:

Although there can be no shear stresses in a fluid at rest, shear stresses are developed when the fluid is in motion, if the particles of the fluid move relative to each other so that they have different velocities, causing the original shape of the fluid to become distorted. If, on the other hand, the velocity of the fluid is same at every point, no shear stresses will be produced, since the fluid particles are at rest relative to each other.

Differences between solids and fluids: The differences between the behaviour of solids and fluids under an applied force are as follows:

- i. For a solid, the strain is a function of the applied stress, providing that the elastic limit is not exceeded. For a fluid, the rate of strain is proportional to the applied stress.
- ii. The strain in a solid is independent of the time over which the force is applied and, if the elastic limit is not exceeded, the deformation disappears when the force is removed. A fluid continues to flow as long as the force is applied and will not recover its original form when the force is removed.

Differences between liquids and gases:

Although liquids and gases both share the common characteristics of fluids, they have many distinctive characteristics of their own. A liquid is difficult to compress and, for many purposes, may be regarded as incompressible. A given mass of liquid occupies a fixed volume, irrespective of the size or shape of its container, and a free surface is formed if the volume of the container is greater than that of the liquid.

A gas is comparatively easy to compress (Fig.1). Changes of volume with pressure are large, cannot normally be neglected and are related to changes of temperature. A given mass of gas has no fixed volume and will expand continuously unless restrained by a containing vessel. It will completely fill any vessel in which it is placed and, therefore, does not form a free surface.

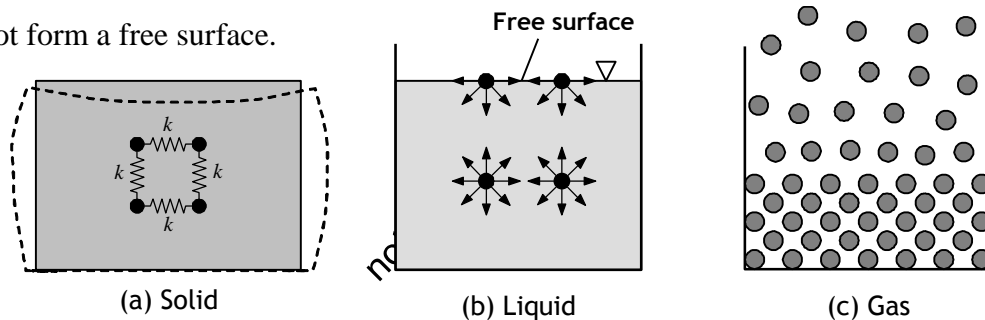


Fig.1 Comparison of Solid, Liquid and Gas

1.2 Systems of Units:

The official international system of units (System International Units). Strong efforts are underway for its universal adoption as the exclusive system for all engineering and science, but older systems, particularly the CGS and FPS engineering gravitational systems are still in use and probably will be around for some time. The chemical engineer finds many physiochemical data given in CGS units; that many calculations are most conveniently made in fps units; and that SI units are increasingly encountered in science and engineering. Thus it becomes necessary to be expert in the use of all three systems.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

SI system:

Primary quantities:

<i>Quantity</i>	<i>Unit</i>
Mass in Kilogram	kg
Length in Meter	m
Time in Second	s or as sec
Temperature in Kelvin	K
Mole	mol

Derived quantities:

<i>Quantity</i>	<i>Unit</i>
Force in Newton (1 N = 1 kg.m/s ²)	N
Pressure in Pascal (1 Pa = 1 N/m ²)	N/m ²
Work, energy in Joule (1 J = 1 N.m)	J
Power in Watt (1 W = 1 J/s)	W

CGS Units:

The older centimeter-gram-second (cgs) system has the following units for derived quantities:

<i>Quantity</i>	<i>Unit</i>
Force in dyne (1 dyn = 1 g.cm/s ²)	dyn
Work, energy in erg (1 erg = 1 dyn.cm = 1 x 10 ⁻⁷ J)	erg
Heat Energy in calorie (1 cal = 4.184 J)	cal

Dimensions: Dimensions of the primary quantities:

<i>Fundamental dimension</i>	<i>Symbol</i>
Length	L
Mass	M
Time	t
Temperature	T

Dimensions of derived quantities can be expressed in terms of the fundamental dimensions.

<i>Quantity</i>	<i>Representative symbol</i>	<i>Dimensions</i>
Angular velocity	ω	t^{-1}
Area	A	L^2
Density	ρ	M/L^3
Force	F	ML/t^2
Kinematic viscosity	ν	L^2/t
Linear velocity	v	L/t

1.3 Properties of fluids:

1.3.1 Mass density or Specific mass (ρ):

Mass density or specific mass is the mass per unit volume of the fluid.

$$\therefore \rho = \frac{\text{Mass}}{\text{Volume}}$$

$$\rho = \frac{M}{V} \text{ or } \frac{dM}{dV}$$

Unit: kg/m^3

With the increase in temperature volume of fluid increases and hence mass density decreases in case of fluids as the pressure increases volume decreases and hence mass density increases.

1.3.2 Weight density or Specific weight (γ):

Weight density or Specific weight of a fluid is the weight per unit volume.

$$\therefore \gamma = \frac{\text{Weight}}{\text{Volume}} = \frac{W}{V} \text{ or } \frac{dW}{dV}$$

Unit: N/m^3 or Nm^{-3} .

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

With increase in temperature volume increases and hence specific weight decreases.

With increases in pressure volume decreases and hence specific weight increases.

Note: Relationship between mass density and weight density:

$$\text{We have } \gamma = \frac{\text{Weight}}{\text{Volume}}$$

$$\gamma = \frac{\text{mass} \times g}{\text{Volume}}$$

$$\gamma = \rho \times g$$

1.3.3 Specific gravity or Relative density (S):

It is the ratio of density of the fluid to the density of a standard fluid.

$$S = \frac{\rho_{\text{fluid}}}{\rho_{\text{standard fluid}}}$$

Unit: It is a dimensionless quantity and has no unit.

In case of liquids water at 4°C is considered as standard liquid. $\rho_{\text{water}} = 1000 \text{ kg/m}^3$

1.3.4 Specific volume (∇): It is the volume per unit mass of the fluid.

$$\therefore \nabla = \frac{\text{Volume}}{\text{mass}} = \frac{V}{M} \text{ or } \frac{dV}{dM}$$

Unit: m^3/kg

As the temperature increases volume increases and hence specific volume increases. As the pressure increases volume decreases and hence specific volume decreases.

Solved Problems:

Ex.1 Calculate specific weight, mass density, specific volume and specific gravity of a liquid having a volume of 4m^3 and weighing 29.43 kN . Assume missing data suitably.

$$\begin{aligned}\gamma &= \frac{W}{V} \\ &= \frac{29.43 \times 10^3}{4} \\ \gamma &= 7357.58 \text{ N/m}^3\end{aligned}$$

$$\begin{aligned}\gamma &= ? \\ \rho &= ? \\ \forall &= ? \\ S &= ? \\ V &= 4 \text{ m}^3 \\ W &= 29.43 \text{ kN} \\ &= 29.43 \times 10^3 \text{ N}\end{aligned}$$

To find ρ - Method 1:

$$W = mg$$

$$29.43 \times 10^3 = m \times 9.81$$

$$m = 3000 \text{ kg}$$

$$\therefore \rho = \frac{m}{V} = \frac{3000}{4}$$

$$\rho = 750 \text{ kg/m}^3$$

$$\text{i) } \forall = \frac{V}{M}$$

$$= \frac{4}{3000}$$

$$\forall = 1.33 \times 10^{-3} \text{ m}^3 / \text{kg}$$

Method 2:

$$\gamma = \rho g$$

$$7357.5 = \rho \times 9.81$$

$$\rho = 750 \text{ kg/m}^3$$

$$\rho = \frac{M}{V}$$

$$\forall = \frac{V}{M}$$

$$\forall = \frac{1}{\rho} = \frac{1}{750}$$

$$\forall = 1.33 \times 10^{-3} \text{ m}^3 / \text{kg}$$

$$S = \frac{\gamma}{\gamma_{\text{Standard}}}$$

$$= \frac{7357.5}{9810}$$

$$S = 0.75$$

$$S = \frac{\rho}{\rho_{\text{Standard}}}$$

$$S = \frac{750}{1000}$$

$$S = 0.75$$

or

Ex.2 Calculate specific weight, density, specific volume and specific gravity and if one liter of Petrol weighs 6.867N.

$$\gamma = \frac{W}{V}$$

$$= \frac{6.867}{10^{-3}}$$

$$\gamma = 6867 \text{ N/m}^3$$

$$S = \frac{\gamma}{\gamma_{\text{Standard}}}$$

$$= \frac{6867}{9810}$$

$$S = 0.7$$

$$\forall = \frac{V}{M}$$

$$= \frac{10^{-3}}{0.7}$$

$$\forall = 1.4 \times 10^{-3} \text{ m}^3 / \text{kg}$$

$$V = 1 \text{ Litre}$$

$$= 10^{-3} \text{ m}^3$$

$$W = 6.867 \text{ N}$$

$$\rho = s \cdot g$$

$$6867 = \rho \times 9.81$$

$$\rho = 700 \text{ kg/m}^3$$

$$M = 6.867 \div 9.81$$

$$M = 0.7 \text{ kg}$$

notes4free.in

Ex.3 Specific gravity of a liquid is 0.7 Find i) Mass density ii) specific weight. Also find the mass and weight of 10 Liters of liquid.

$$S = \frac{\gamma}{\gamma_{\text{Standard}}}$$

$$\gamma = \rho g$$

$$S = 0.7$$

$$V = ?$$

$$\rho = ?$$

$$M = ?$$

$$W = ?$$

$$0.7 = \frac{\gamma}{9810}$$

$$6867 = \rho \times 9.81$$

$$V = 10 \text{ litre}$$

$$= 10 \times 10^{-3} \text{ m}^3$$

$$\gamma = 6867 \text{ N / m}^3$$

$$\rho = 700 \text{ kg / m}^3$$

$$S = \frac{\rho}{\rho_{\text{Standard}}}$$

$$0.7 = \frac{\rho}{1000}$$

$$\rho = 700 \text{ kg / m}^3$$

$$\rho = \frac{M}{V}$$

$$700 = \frac{M}{10 \times 10^{-3}}$$

$$M = 7 \text{ kg}$$

notes4free.in

1.3.5 Viscosity: Viscosity is the property by virtue of which fluid offers resistance against the flow or shear deformation. In other words, it is the reluctance of the fluid to flow. Viscous force is that force of resistance offered by a layer of fluid for the motion of another layer over it.

In case of liquids, viscosity is due to cohesive force between the molecules of adjacent layers of liquid. In case of gases, molecular activity between adjacent layers is the cause of viscosity.

• **Newton’s law of viscosity:**

Let us consider a liquid between the fixed plate and the movable plate at a distance ‘Y’ apart, ‘A’ is the contact area (Wetted area) of the movable plate, ‘F’ is the force required to move the plate with a velocity ‘U’ According to Newton’s law shear stress is proportional to shear strain. (Fig.2)

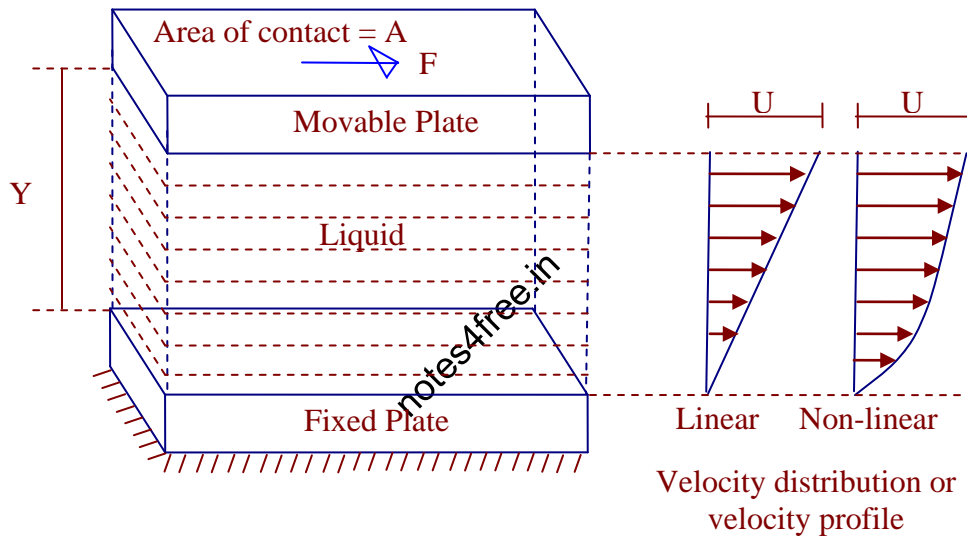


Fig.2 Definition diagram of Liquid viscosity

◆ $F \propto A$

◆ $F \propto \frac{1}{Y}$

◆ $F \propto U$

$\therefore F \propto \frac{AU}{Y}$

$F = \mu \cdot \frac{AU}{Y}$

‘μ’ is the constant of proportionality called Dynamic Viscosity or Absolute Viscosity or Coefficient of Viscosity or Viscosity of the fluid.

$\frac{F}{A} = \mu \cdot \frac{U}{Y} \longrightarrow \therefore \tau = \mu \frac{U}{Y}$

' τ ' is the force required; Per Unit area called 'Shear Stress'. The above equation is called Newton's law of viscosity.

Velocity gradient or rate of shear strain:

It is the difference in velocity per unit distance between any two layers.

If the velocity profile is linear then velocity gradient is given by $\frac{U}{Y}$. If the velocity profile

is non – linear then it is given by $\frac{du}{dy}$.

- ◆ Unit of force (F): N.
- ◆ Unit of distance between the two plates (Y): m
- ◆ Unit of velocity (U): m/s
- ◆ Unit of velocity gradient : $\frac{U}{Y} = \frac{\text{m/s}}{\text{m}} = \text{s}^{-1}$
- ◆ Unit of dynamic viscosity (μ): $\tau \cdot \frac{y}{u}$

$$\mu = \frac{\tau y}{U}$$

$$\Rightarrow \frac{\text{N/m}^2 \cdot \text{m}}{\text{m/s}}$$

$$\mu \Rightarrow \frac{\text{N} \cdot \text{sec}}{\text{m}^2} \text{ or } \mu \Rightarrow \text{Pa} \cdot \text{s}$$

NOTE: In CGS system unit of dynamic viscosity is $\frac{\text{dyne} \cdot \text{s}}{\text{cm}^2}$ and is called poise (P).

If the value of μ is given in poise, multiply it by 0.1 to get it in $\frac{\text{NS}}{\text{m}^2}$.

1 Centipoises = 10^{-2} Poise.

◆ **Effect of Pressure on Viscosity of fluids:**

Pressure has very little or no effect on the viscosity of fluids.

◆ **Effect of Temperature on Viscosity of fluids:**

1. *Effect of temperature on viscosity of liquids:* Viscosity of liquids is due to cohesive force between the molecules of adjacent layers. As the temperature increases cohesive force decreases and hence viscosity decreases.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

2. *Effect of temperature on viscosity of gases:* Viscosity of gases is due to molecular activity between adjacent layers. As the temperature increases molecular activity increases and hence viscosity increases.

◆ **Kinematics Viscosity:** It is the ratio of dynamic viscosity of the fluid to its mass density.

$$\therefore \text{Kinematic Viscosity} = \frac{\mu}{\rho}$$

Unit of KV:

$$\text{KV} \Rightarrow \frac{\mu}{\rho}$$

$$\Rightarrow \frac{\text{NS/m}^2}{\text{kg/m}^3}$$

$$= \frac{\text{NS}}{\text{m}^2} \times \frac{\text{m}^3}{\text{kg}}$$

$$= \left(\frac{\text{kg m}}{\text{s}^2} \right) \times \frac{\text{s}}{\text{m}^2} \times \frac{\text{m}^3}{\text{kg}} = \text{m}^2 / \text{s}$$

$$F = ma$$

$$N = \text{Kg.m/s}^2$$

$$\therefore \text{Kinematic Viscosity} = \text{m}^2 / \text{s}$$

NOTE: Unit of kinematics Viscosity in CGS system is $\frac{\text{cm}^2}{\text{s}}$ and is called stoke (S)

If the value of KV is given in stoke, multiply it by 10^{-4} to convert it into m^2/s .

The Fig. 3 illustrates how μ changes for different fluids.


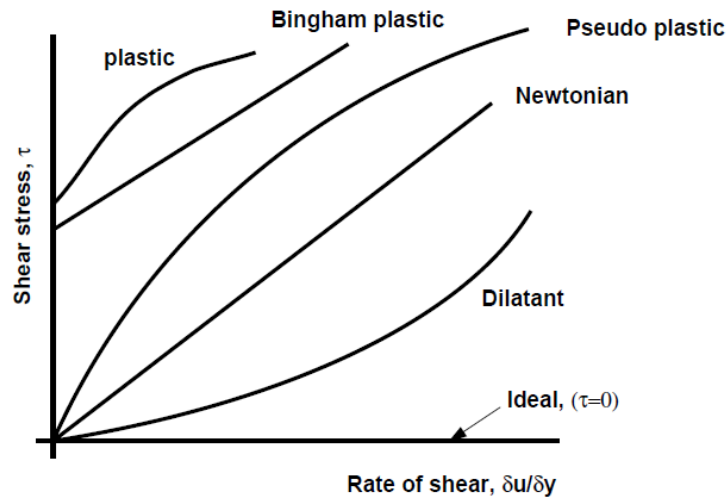


Fig.3 Variation of Viscosity based on Behaviour of Liquids

- Plastic: Shear stress must reach a certain minimum before flow commences.
- Bingham plastic: As with the plastic above a minimum shear stress must be achieved. With this classification $n = 1$. An example is sewage sludge.
- Pseudo-plastic: No minimum shear stress necessary and the viscosity decreases with rate of shear, e.g. colloidal substances like clay, milk and cement.
- Dilatant substances; Viscosity increases with rate of shear e.g. quicksand.
- Thixotropic substances: Viscosity decreases with length of time shear force is applied e.g. thixotropic jelly paints.
- Rheopectic substances: Viscosity increases with length of time shear force is applied
- Viscoelastic materials: Similar to Newtonian but if there is a sudden large change in shear they behave like plastic

The figure shows the relationship between shear stress and velocity gradient for two fluids, A and B. Comment on the Liquid 'A' and Liquid 'B' ?

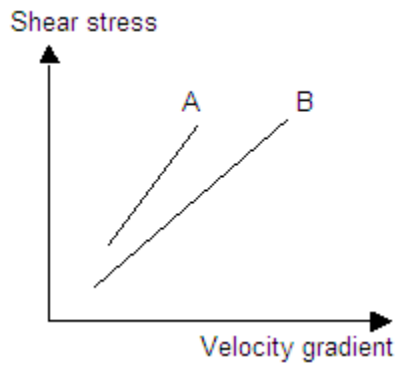

Comments: (i) The dynamic viscosity of liquid A > the dynamic viscosity of liquid B
(ii) Both liquids follow Newton's Law of Viscosity

notes4free.in

Solved Problems:

1. Viscosity of water is 0.01 poise. Find its kinematics viscosity if specific gravity is 0.998.

Kinematics viscosity = ?

$$\mu = 0.01 \text{ P}$$

$$S = 0.998$$

$$= 0.01 \times 0.1$$

$$S = \frac{\rho}{\rho_{\text{standard}}}$$

$$\mu = 0.001 \frac{\text{NS}}{\text{m}^2}$$

$$\therefore \text{Kinematic Viscosity} = \frac{\mu}{\rho}$$

$$0.998 = \frac{\rho}{1000}$$


$$= \frac{0.001}{998}$$

$$\text{KV} = 1 \times 10^{-6} \text{ m}^2 / \text{s}$$

$$\rho = 998 \text{ kg/m}^3$$

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

2. A Plate at a distance 0.0254mm from a fixed plate moves at 0.61m/s and requires a force of 1.962N/m² area of plate. Determine dynamic viscosity of liquid between the plates.

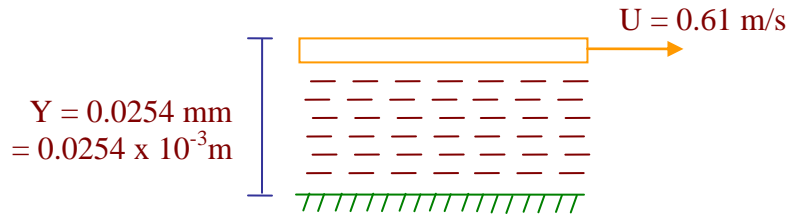

$$\tau = 1.962 \text{ N/m}^2$$

$$\mu = ?$$


Assuming linear velocity distribution

$$\tau = \mu \frac{U}{Y}$$

$$1.962 = \mu \times \frac{0.61}{0.0254 \times 10^{-3}}$$

$$\mu = 8.17 \times 10^{-5} \frac{\text{NS}}{\text{m}^2}$$

3. A plate having an area of 1m² is dragged down an inclined plane at 45° to horizontal with a velocity of 0.5m/s due to its own weight. There is a cushion of liquid 1mm thick between the inclined plane and the plate. If viscosity of oil is 0.1 PaS find the weight of the plate.

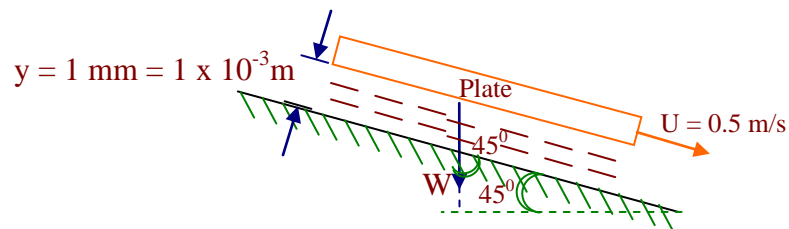

$$A = 1 \text{ m}^2$$

$$U = 0.5 \text{ m/s}$$

$$Y = 1 \times 10^{-3} \text{ m}$$

$$\mu = 0.1 \text{ NS/m}^2$$

$$W = ?$$

$$F = W \times \cos 45^\circ$$

$$= W \times 0.707$$

$$F = 0.707W$$

$$\tau = \frac{F}{A}$$

$$\tau = \frac{0.707W}{1}$$

$$\tau = 0.707WN/m^2$$

Assuming linear velocity distribution,

$$\tau = \mu \cdot \frac{U}{Y}$$

$$0.707W = 0.1 \times \frac{0.5}{1 \times 10^{-3}}$$

$$W = 70.72 \text{ N}$$

notes4free.in

4. A flat plate is sliding at a constant velocity of 5 m/s on a large horizontal table. A thin layer of oil (of absolute viscosity = 0.40 N-s/m²) separates the plate from the table. Calculate the thickness of the oil film (mm) to limit the shear stress in the oil layer to 1 kPa,

Given : $\tau = 1 \text{ kPa} = 1000 \text{ N/m}^2$; $U = 5 \text{ m/s}$; $\mu = 0.4 \text{ N-s/m}^2$


Applying Newton's Viscosity law for the oil film -

$$\tau = \mu \frac{du}{dy} = \mu \frac{U}{y}$$

$$1000 = 0.4 \frac{5}{y}$$

$$y = 2 \times 10^{-3} = 2 \text{ mm}$$

5. A shaft of ϕ 20mm and mass 15kg slides vertically in a sleeve with a velocity of 5 m/s. The gap between the shaft and the sleeve is 0.1mm and is filled with oil. Calculate the viscosity of oil if the length of the shaft is 500mm.

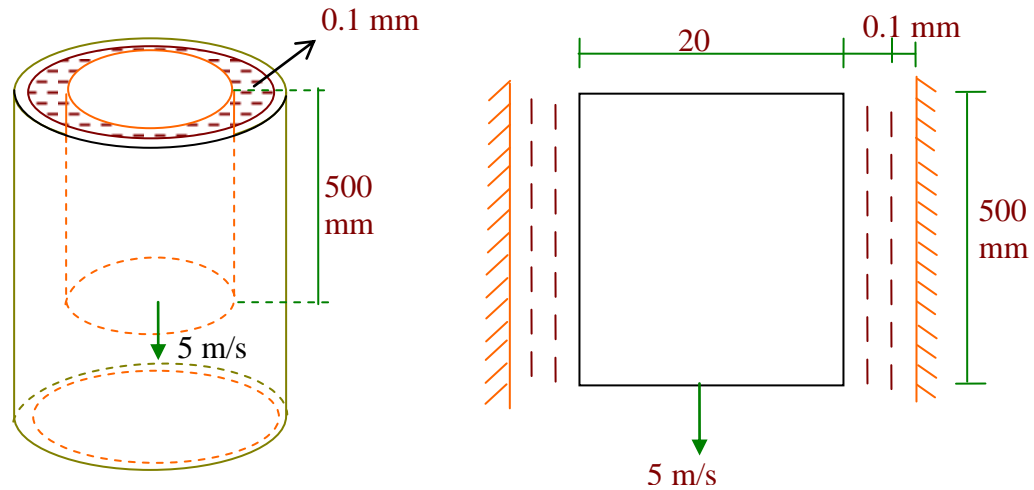

$$D = 20\text{mm} = 20 \times 10^{-3}\text{m}$$

$$M = 15\text{ kg}$$

$$W = 15 \times 9.81$$

$$W = 147.15\text{N}$$

$$y = 0.1\text{mm}$$

$$y = 0.1 \times 10^{-3}\text{mm}$$

$$U = 5\text{m/s}$$

$$F = W$$

$$F = 147.15\text{N}$$

$$\mu = ?$$

$$A = \pi D L$$

$$A = \pi \times 20 \times 10^{-3} \times 0.5$$

$$A = 0.031\text{ m}^2$$

notes4free.in

$$\tau = \mu \cdot \frac{U}{Y}$$

$$4746.7 = \mu \times \frac{5}{0.1 \times 10^{-3}}$$

$$\mu = 0.095 \frac{NS}{m^2}$$

$$\tau = \frac{F}{A}$$

$$= \frac{147.15}{0.031}$$

$$\tau = 4746.7 \text{ N/m}^2$$

6. If the equation of velocity profile over a plate is $V = 2y^{2/3}$. in which 'V' is the velocity in m/s and 'y' is the distance in 'm'. Determine shear stress at (i) $y = 0$ (ii) $y = 75\text{mm}$.
Take $\mu = 8.35\text{P}$.

a. at $y = 0$

b. at $y = 75\text{mm}$

$$= 75 \times 10^{-3}\text{m}$$

$$\tau = 8.35 \text{ P}$$

$$= 8.35 \times 0.1 \frac{NS}{m^2}$$

$$= 0.835 \frac{NS}{m^2}$$

$$V = 2y^{2/3}$$

$$\frac{dv}{dy} = 2 \times \frac{2}{3} y^{2/3-1}$$

$$= \frac{4}{3} y^{-1/3}$$

$$\text{at, } y = 0, \frac{dv}{dy} = 3 \frac{4}{\sqrt[3]{0}} = \infty$$

$$\text{at, } y = 75 \times 10^{-3} \text{ m, } \frac{dv}{dy} = 3 \frac{4}{\sqrt[3]{75 \times 10^{-3}}}$$

$$\frac{dv}{dy} = 3.16 / \text{s}$$

$$\tau = \mu \cdot \frac{dv}{dy}$$

notes4free.in


$$\text{at, } y = 0, \tau = 0.835 \times \infty$$

$$\tau = \infty$$

$$\text{at, } y = 75 \times 10^{-3} \text{ m, } \tau = 0.835 \times 3.16$$

$$\tau = 2.64 \text{ N / m}^2$$

7. A circular disc of 0.3m dia and weight 50 N is kept on an inclined surface with a slope of 45° . The space between the disc and the surface is 2 mm and is filled with oil of dynamics viscosity $\frac{1NS}{m^2}$. What force will be required to pull the disk up the inclined plane with a velocity of 0.5m/s.

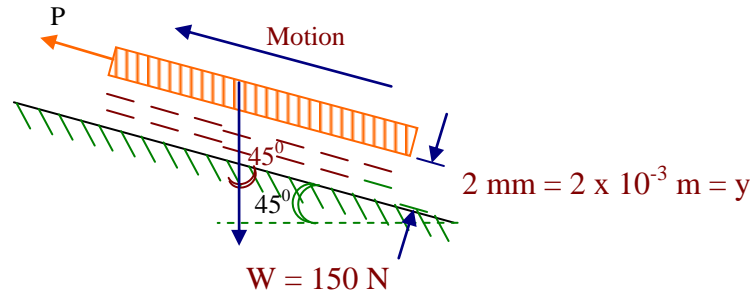

$$D = 0.3m$$

$$A = \frac{\pi \times 0.3m^2}{4}$$

$$A = 0.07m^2$$

$$W = 50N$$

$$\mu = 1 \frac{NS}{m^2}$$

$$\frac{y = 2 \times 10^{-3} m}{U = 0.5 m/s}$$

$$\tau = \mu \cdot \frac{U}{Y}$$

$$\left(\frac{P - 35.35}{0.07} \right) = 1 \times \frac{0.5}{2 \times 10^{-3}}$$


$$P = 52.85N$$

$$F = P - 50 \cos 45$$

$$F = (P - 35.35)$$

$$\nu = \frac{(P - 35.35)}{0.07} N/m^2$$

8. Dynamic viscosity of oil used for lubrication between a shaft and a sleeve is 6 P. The shaft is of diameter 0.4 m and rotates at 190 rpm. Calculate the power lost in the bearing for a sleeve length of 0.09 m .Thickness of oil is 1.5 mm.

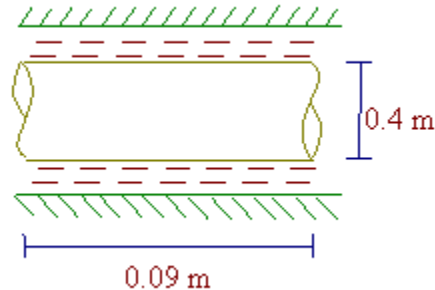

$$\mu = 6 = 0.6 \frac{NS}{m^2}$$

$$N = 190 \text{ rpm}$$

Power lost = ?


$$A = \pi D L$$

$$= \pi \times 0.4 \times 0.09 \quad A = 0.11m^2$$

$$Y = 1.5 \times 10^{-3} \text{ m}$$

9. Two large surfaces are 2.5 cm apart. This space is filled with glycerin of absolute viscosity 0.82 NS/m². Find what force is required to drag a plate of area 0.5m² between the two surfaces at a speed of 0.6m/s. (i) When the plate is equidistant from the surfaces, (ii) when the plate is at 1cm from one of the surfaces.

Case (i) When the plate is equidistant from the surfaces,

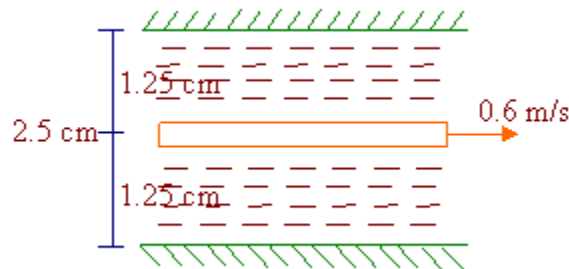

$$U = \frac{\Pi DN}{60}$$

$$= \frac{\Pi \times 0.4 \times 190}{60}$$

$$U = 3.979 \text{ m/s}$$

$$\tau = \mu \cdot \frac{U}{Y}$$

$$= 0.6 \times \frac{3.979}{1.5 \times 10^{-3}}$$

$$\tau = 1.592 \times 10^3 \text{ N/m}^2$$

$$\frac{F}{A} = 1.59 \times 10^3$$

$$F = 1.591 \times 10^3 \times 0.11$$

$$F = 175.01 \text{ N}$$

$$T = F \times R$$

$$= 175.01 \times 0.2$$

$$T = 35 \text{ Nm}$$

$$P = \frac{2\Pi NT}{60,000}$$

$$P = 0.6964 \text{ KW}$$

$$P = 696.4 \text{ W}$$

Let F_1 be the force required to overcome viscosity resistance of liquid above the plate and F_2 be the force required to overcome viscous resistance of liquid below the plate. In this case $F_1 = F_2$. Since the liquid is same on either side or the plate is equidistant from the surfaces.

$$\tau_1 = \mu_1 \frac{U}{Y}$$

$$\tau_1 = 0.82 \times \frac{0.6}{0.0125}$$

$$\tau_1 = 39.36 \text{ N/m}^2$$

$$\frac{F_1}{A} = 39.36$$


$$F_1 = 19.68 \text{ N}$$

\therefore Total force required to drag the plate $= F_1 + F_2 = 19.68 + 19.68$

$$F = 39.36 \text{ N}$$

Case (ii) when the plate is at 1cm from one of the surfaces.

Here $F_1 \neq F_2$

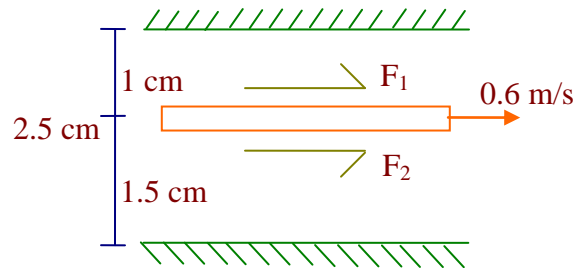

$$\frac{F_1}{A} = 49.2$$

$$F_1 = 49.2 \times 0.5$$

$$F_1 = 24.6 \text{ N}$$

$$\frac{F_2}{A} = 32.8$$

$$F_2 = 32.8 \times 0.5$$

$$F_2 = 16.4 \text{ N}$$

$$\text{Total Force } F = F_1 + F_2 = 24.6 + 16.4$$


$$F = 41\text{N}$$

10. Through a very narrow gap of height h a thin plate of large extent is pulled at a velocity V .

On one side of the plate is oil of viscosity μ_1 and on the other side there is oil of viscosity μ_2 . Determine the position of the plate for the following conditions.

- Shear stress on the two sides of the plate is equal.
- The pull required, to drag the plate is minimum.

Condition 1: Shear stress on the two sides of the plate is equal $F_1 = F_2$

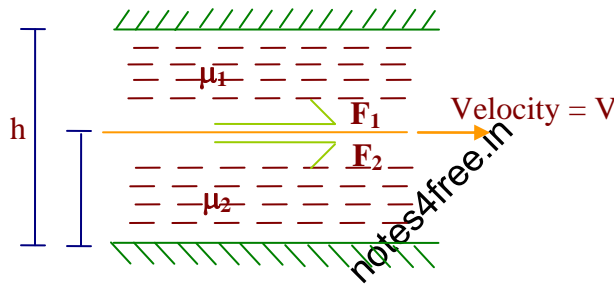

$$y = ? \text{ for } F_1 = F_2$$

$$\tau = \mu \cdot \frac{U}{Y}$$

$$\frac{F}{A} = \mu \cdot \frac{U}{Y}$$

$$F = A\mu \cdot \frac{U}{Y}$$

$$F_1 = \frac{A\mu_1 V}{(h-y)}$$

$$F_2 = \frac{A\mu_2 V}{y}$$

$$F_1 = F_2$$

$$\frac{A\mu_1 V}{h-y} = \frac{A\mu_2 V}{y}$$


$$\mu_1 y = \mu_2 (h-y)$$

$$\mu_1 y + \mu_2 y = \mu_2 h$$

$$y = \frac{\mu_2 h}{\mu_1 + \mu_2} \text{ or } y = \frac{h}{\frac{\mu_1}{\mu_2} + 1}$$

Condition 2: The pull required, to drag the plate is minimum (i.e. $[\frac{dF}{dy}]_{\text{minimum}}$)

\therefore Total drag forced required

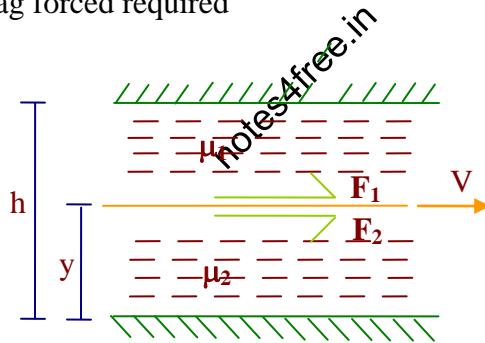

$y = ?$ if, $F_1 + F_2$ is to be minimum

$$F_1 = \frac{A\mu_1 V}{h-y}$$

$$F_2 = \frac{A\mu_2 V}{y}$$

$$F = F_1 + F_2$$

$$F = \frac{A\mu_1 V}{h-y} + \frac{A\mu_2 V}{y}$$

$$\text{For } F \text{ to be min. } \frac{dF}{dy} = 0$$

$$\frac{dF}{dy} = 0 = +A\mu_1 V \equiv (h-y)^{-2} - A\mu_2 V y^{-2}$$

$$= \frac{V\mu_1 A}{(h-y)^2} - \frac{V\mu_2 A}{y^2}$$

$$\frac{(h-y)^2}{y^2} = \frac{\mu_1}{\mu_2}$$

$$\frac{h-y}{y} = \sqrt{\frac{\mu_1}{\mu_2}}$$

$$(h-y) = y \sqrt{\frac{\mu_1}{\mu_2}}$$


$$h = y \sqrt{\frac{\mu_1}{\mu_2}} + y$$

$$h = y \left(1 + \sqrt{\frac{\mu_1}{\mu_2}} \right)$$

$$\therefore y = \frac{h}{1 + \sqrt{\frac{\mu_1}{\mu_2}}}$$



notes4free.in

1.3.6 Capillarity :

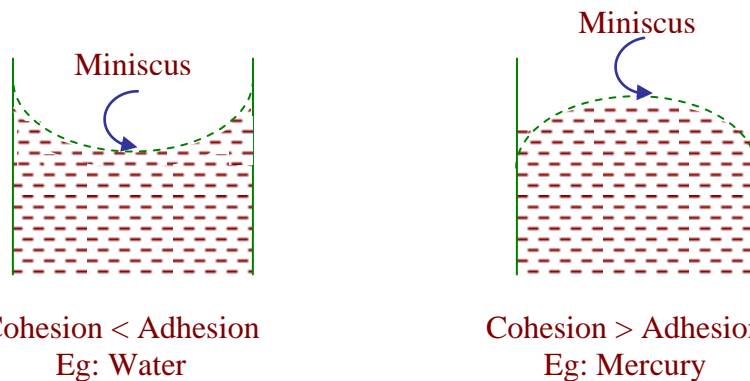


Any liquid between contact surfaces attains curved shaped surface as shown in figure. The curved surface of the liquid is called Meniscus. If adhesion is more than cohesion then the meniscus will be concave. If cohesion is greater than adhesion meniscus will be convex.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

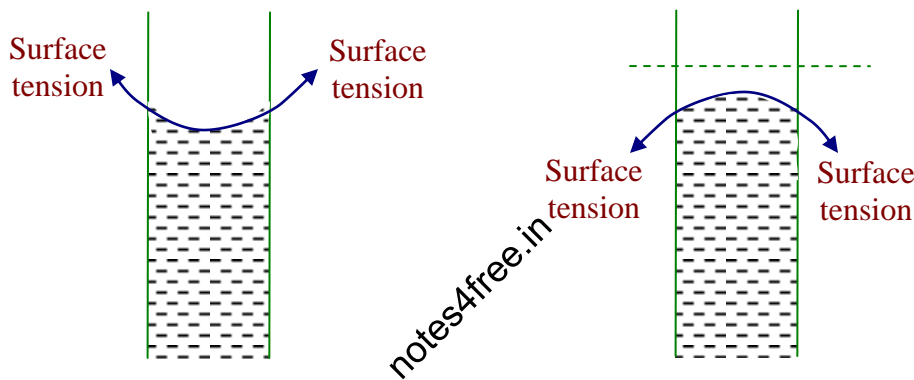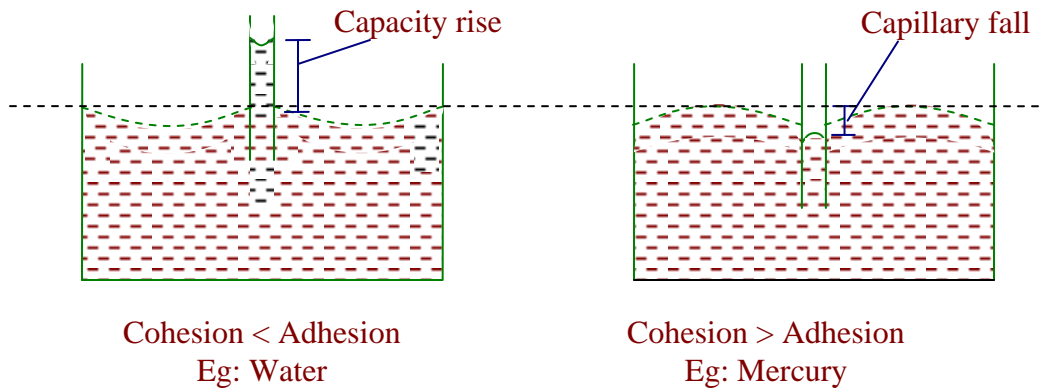

Capillarity is the phenomena by which liquids will rise or fall in a tube of small diameter dipped in them. Capillarity is due to cohesion adhesion and surface tension of liquids. If adhesion is more than cohesion then there will be capillary rise. If cohesion is greater than adhesion then will be capillary fall or depression. The surface tensile force supports capillary rise or depression.

Angle of contact:

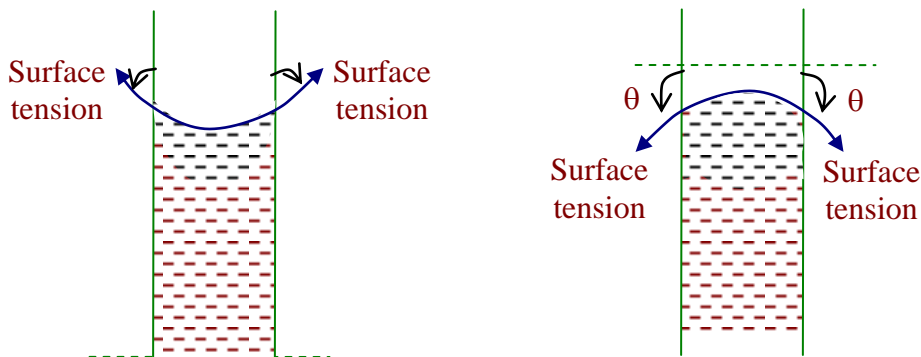


$\theta \rightarrow$ Angle of contact
 \rightarrow Acute

$\theta \rightarrow$ Angle of contact
 \rightarrow Obtuse

Note:


The angle between surface tensile force and the vertical is called angle of contact. If adhesion is more than cohesion then angle of contact is obtuse.

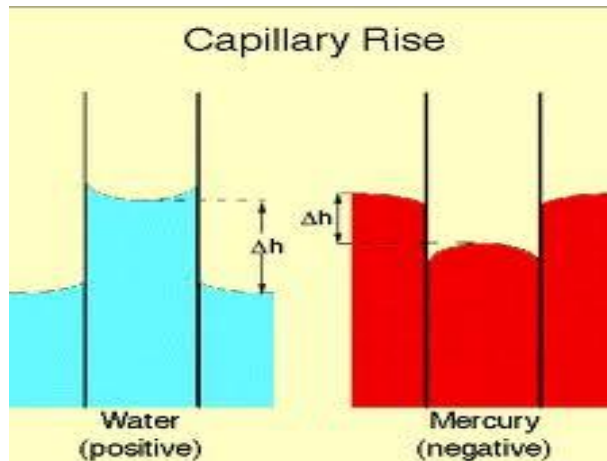

- **To derive an expression for the capillary rise of a liquid in small tube dipped in it:**

Let us consider a small tube of diameter 'D' dipped in a liquid of specific weight γ . 'h' is the capillary rise. For the equilibrium,

Vertical force due to surface tension = Weight of column of liquid ABCD

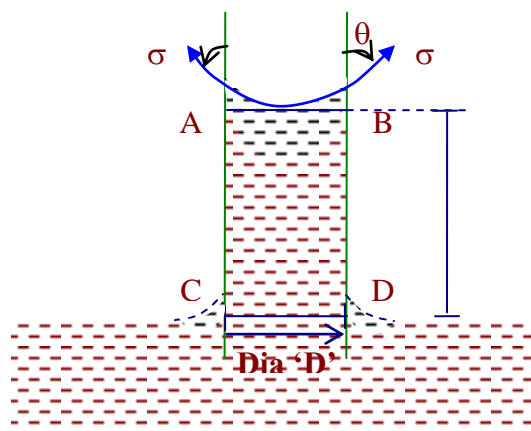

$$[\sigma(\pi D)] \cos\theta = \gamma \times \text{volume}$$

$$[\sigma(\pi D)] \cos\theta = \gamma \times \frac{\pi D^2}{4} \times h$$

$$h = \frac{4\sigma \cos\theta}{\gamma D}$$

It can be observed that the capillary rise is inversely proportional to the diameter of the tube.

Note:

The same equation can be used to calculate capillary depression. In such cases 'θ' will be obtuse 'h' works out to be -ve.



Excess Pressure inside a Water Droplet:

Pressure inside a Liquid droplet: Liquid droplets tend to assume a spherical shape since a sphere has the smallest surface area per unit volume.

The pressure inside a drop of fluid can be calculated using a free-body diagram of a spherical shape of radius R cut in half, as shown in Figure below and the force developed around the edge of the cut sphere is $2\pi R\sigma$. This force must be balance with the difference between the internal pressure p_i and the external pressure Δp acting on the circular area of the cut. Thus,


$$2\pi R\sigma = \Delta p \pi R^2$$

$$\Delta p = (p_{\text{internal}} - p_{\text{external}}) = \frac{2 \times \sigma}{R} = \frac{4 \times \sigma}{D}$$

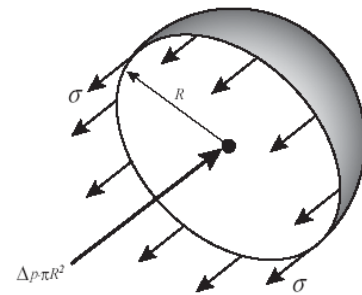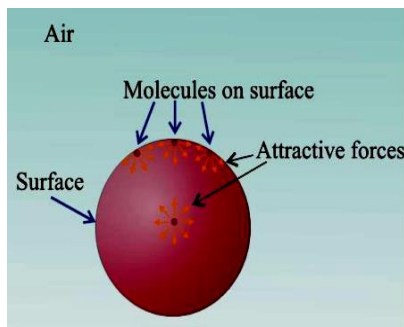

The excess pressure within a Soap bubble:

The fact that air has to be blown into a drop of soap solution to make a bubble should suggest that the pressure within the bubble is greater than that outside. This is in fact the case: this excess pressure creates a force that is just balanced by the inward pull of the soap film of the bubble due to its surface tension.



Consider a soap bubble of radius r as shown in Figure 1. Let the external pressure be P_0 and the internal pressure P_1 . The excess pressure ΔP within the bubble is therefore given by: Excess pressure $\Delta p = (P_1 - P_0)$

Consider the left-hand half of the bubble. The force acting from right to left due to the internal excess pressure can be shown to be PA , where A is the area of a section through the centre of the bubble. If the bubble is in equilibrium this force is balanced by a force due to surface tension acting from left to right. This force is $2 \times 2\pi r\sigma$ (the factor of 2 is necessary because the soap film has two sides) where ' σ ' is the coefficient of surface tension of the soap film. Therefore

$$2 \times 2\pi r\sigma = \Delta p A = \Delta p \pi r^2 \text{ giving:}$$

$$\text{Excess pressure in a soap bubble } (P) = 4\sigma/r$$


Bulk Modulus (K):

When a solid or fluid (liquid or gas) is subjected to a uniform pressure all over the surface, such that the shape remains the same, then there is a change in volume.

Then the ratio of normal stress to the volumetric strain within the elastic limits is called as Bulk modulus. This is denoted by K .

$$K = \frac{\text{Normal stress}}{\text{volumetric strain}}$$

$$K = \frac{F/A}{-\Delta V/V} = \frac{-pV}{\Delta V}$$

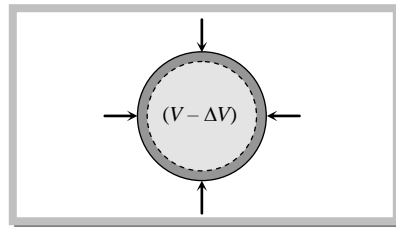

where p = increase in pressure; V = original volume; ΔV = change in volume

The negative sign shows that with increase in pressure p , the volume decreases by ΔV i.e. if p is positive, ΔV is negative. The reciprocal of bulk modulus is called compressibility.

$$C = \text{Compressibility} = \frac{1}{K} = \frac{\Delta V}{pV}$$


S.I. unit of compressibility is $N^{-1}m^2$ and C.G.S. unit is $\text{dyne}^{-1} \text{cm}^2$.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

Vpour Pressure:

Vapor pressure is defined as the pressure at which a liquid will boil (vaporize) and is in equilibrium with its own vapor (fig). Vapor pressure rises as temperature rises. For example, suppose you are camping on a high mountain (say 3,000m in altitude); the atmospheric pressure at this elevation is about 70 kPa and the boiling temperature is around 90°C. This has consequences for cooking. For example, eggs have to be cooked longer at elevation to become hard-boiled since they cook at a lower temperature.

A pressure cooker has the opposite effect. Namely, the tight lid on a pressure cooker causes the pressure to increase above the normal atmospheric value. This causes water to boil at a temperature even greater than 100°C; eggs can be cooked a lot faster in a pressure cooker!

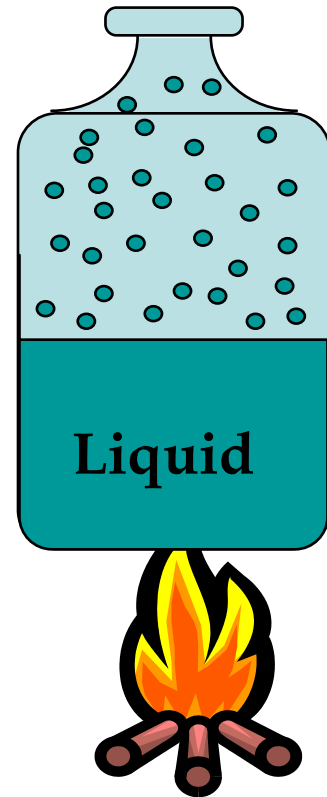

notes4free.in

Vapor pressure is important to fluid flows because, in general, pressure in a flow decreases as velocity increases. This can lead to **cavitation**, which is generally destructive and undesirable. In particular, at high speeds the local pressure of a liquid sometimes drops below the vapor pressure of the liquid. In such a case, **cavitation** occurs. In other words, a "cavity" or bubble of vapor appears because the liquid vaporizes or boils at the location where the pressure dips below the local vapor pressure.

Cavitation is not desirable for several reasons. First, it causes noise (as the cavitation bubbles collapse when they migrate into regions of higher pressure). Second, it can lead to inefficiencies and reduction of heat transfer in pumps and turbines (turbo machines). Finally, the collapse of these cavitation bubbles causes pitting and corrosion of blades and other surfaces nearby. The left figure below shows a cavitating propeller in a water tunnel, and the right figure shows cavitation damage on a blade.

Problems:

1. Capillary tube having an inside diameter 5mm is dipped in water at 20⁰. Determine the height of water which will rise in tube. Take $\sigma = 0.0736 \text{ N/m}$ at 20⁰ C.

$$h = \frac{4\sigma \cos \theta}{\gamma D}$$

$$= \frac{4 \times 0.0736 \times \cos \theta}{9810 \times 5 \times 10^{-3}}$$

$$h = 6 \times 10^{-3} \text{ m}$$

$$\theta = 0^0 \text{ (assumed)}$$

$$\gamma = 9810 \text{ N/m}^3$$

2. Calculate capillary rise in a glass tube when immersed in Hg at 20⁰c. Assume σ for Hg at 20⁰c as 0.51N/m. The diameter of the tube is 5mm. $\theta = 130^0$ c.

$$h = \frac{4\sigma \cos \theta}{\gamma D}$$

$$h = -1.965 \times 10^{-3} \text{ m}$$

notes4free.in

$$S = \frac{\gamma}{\gamma_{\text{standard}}}$$

$$13.6 = \frac{\gamma}{9810}$$

$$\gamma = 133.416 \times 10^3 \text{ N/m}^3$$

-ve sign indicates capillary depression.

3. Determine the minimum size of the glass tubing that can be used to measure water level if capillary rise is not to exceed 2.5mm. Take $\sigma = 0.0736 \text{ N/m}$.

$$h = \frac{4\sigma \cos \theta}{\gamma D}$$

$$D = \frac{4 \times 0.0736 \times \cos 0}{9810 \times 2.5 \times 10^{-3}}$$

$$D = 0.012 \text{ m}$$

$$D = 12 \text{ mm}$$

$$D = ?$$

$$h = 2.5 \times 10^{-3} \text{ m}$$

$$\sigma = 0.0736 \text{ N/m}$$

4. A glass tube 0.25mm in diameter contains Hg column with air above it. If $\sigma = 0.51\text{N/m}$, what will be the capillary depression? Take $\theta = -40^\circ$ or 140° .

$$h = \frac{4\sigma \cos\theta}{\gamma D}$$

$$D = 0.25 \times 10^{-3} \text{ m}$$

$$= \frac{4 \times 0.51 \times \cos 140}{133.146 \times 10^{-3} \times 0.25 \times 10^{-3}}$$


$$\sigma = 0.51 \text{ N/m}$$

$$\theta = 140$$

$$h = -46.851 \times 10^{-3} \text{ m}$$

$$\gamma = 133.416 \times 10^3 \text{ N/m}^2$$

5. If a tube is made so that one limb is 20mm in ϕ and the other 2mm in ϕ and water is poured in the tube, what is the difference in the level of surface of liquid in the two limbs. $\sigma = 0.073 \text{ N/m}$ for water.

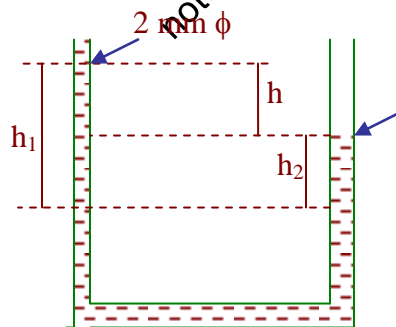

$$h_1 = h = \frac{4\sigma \cos\theta}{\gamma D}$$

$$= \frac{4 \times 0.073 \times \cos 0}{9810 \times (20 \times 10^{-3})}$$

$$= 0.01488 \text{ m}$$

$$h_2 = \frac{4 \times 0.073 \times \cos 0}{9810 \times (20 \times 10^{-3})}$$

$$= 1.488 \times 10^{-3} \text{ m}$$

$$h = h_1 - h_2$$

$$= 0.01339 \text{ m}$$

$$h = 13.39 \text{ mm}$$

notes4free.in

6. A clean glass tube is to be selected in the design of a manometer to measure the pressure of kerosene. Specific gravity of kerosene = 0.82 and surface tension of kerosene = 0.025 N/m. If the capillary rise is to be limited to 1 mm, calculate the smallest diameter (cm) of the glass tube

Soln. Given For kerosene $\sigma = 0.025 \text{ N/m}$; Sp.Gr. = 0.82; $h_{\max} = 1 \text{ mm}$

Assuming contact angle $\theta = 0^\circ$, $\gamma_{\text{kerosene}} = 0.82 \times 9810 = 8044.2 \text{ N/m}^3$

Let 'd' be the smallest diameter of the glass tube in Cm

Then using formula for capillary rise in (h)

$$h = \frac{4 \sigma \cos\theta}{\gamma_{\text{kerosene}} \left(\frac{d_{\text{cm}}}{100}\right)} = \frac{4 \times 0.025 \cos 0^\circ}{8044.2 \times \left(\frac{d_{\text{cm}}}{100}\right)} = \frac{1}{1000}$$

$$d_{\text{cm}} = 1.24 \text{ Cm}$$

7. The surface tension of water in contact with air at 20°C is 0.0725 N/m. The pressure inside a droplet of water is to be 0.02 N/cm² greater than the outside pressure. Calculate the diameter of the droplet of water.

Given: Surface Tension of Water $\sigma = 0.0725$ N/m, $\Delta p = 0.02$ N/cm² = 0.02×10^{-4} N/m²

Let 'D' be the diameter of jet

$$\Delta p = \frac{4\sigma}{D}$$

$$0.02 \times 10^{-4} = \frac{4 \times 0.0725}{D}$$

$$D = 0.00145 \text{ m} = 1.45 \text{ mm}$$

8. Find the surface tension in a soap bubble of 40mm diameter when inside pressure is 2.5 N/m² above the atmosphere.

Given: D = 40mm = 0.04 m, $\Delta p = 2.5$ N/m²

Let ' σ ' be the surface tension of soap bubble

$$\Delta p = \frac{8\sigma}{D}$$

$$2.5 = \frac{4\sigma}{0.04}$$

$$\sigma = 0.0125 \text{ N/m}$$

9. Determine the bulk modulus of elasticity of a liquid, if the pressure of the liquid is increased from 70 N/cm² to 130 N/cm². The volume of the liquid decreases by 0.15 per cent

Given: Initial Pressure = 70 N/cm², Final Pressure = 130 N/cm²
Decrease in Volume = 0.15%

$$\therefore \Delta p = \text{Increase in Pressure} = (130 - 70) = 60 \text{ N/cm}^2$$

$$K = \frac{\Delta p}{\left(-\frac{\Delta V}{V} \right)} = \frac{60}{\left(\frac{0.15}{100} \right)} = 4 \times 10^4 \text{ N/cm}^2$$

Module -1: 2.Fluid Pressure and Its Measurements:

Definition of pressure, Pressure at a point, Pascal's law, Variation of pressure with depth. Types of pressure. Measurement of pressure using simple, differential & inclined manometers (theory & problems). Introduction to Mechanical and electronic pressure measuring devices.

2.0 INTRODUCTION: Fluid is a state of matter which exhibits the property of flow. When a certain mass of fluids is held in static equilibrium by confining it within solid boundaries (Fig.1), it exerts force along direction perpendicular to the boundary in contact. This force is called fluid pressure (compression).

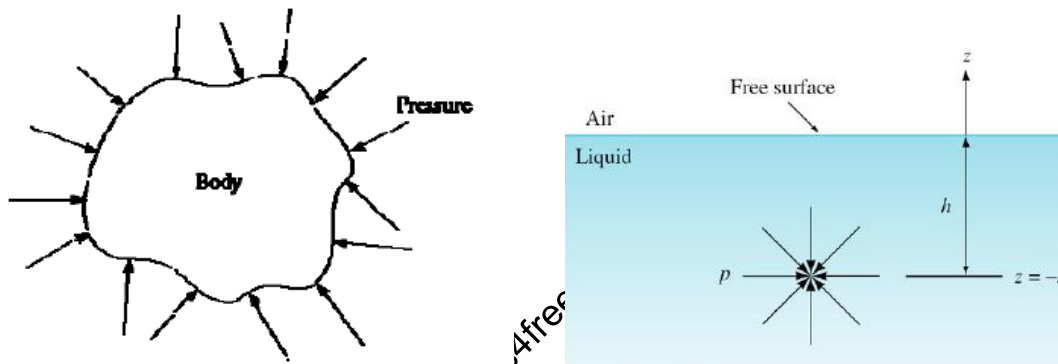


Fig.1 Definition of Pressure

In fluids, gases and liquids, we speak of pressure; in solids this is normal stress.

For a fluid at rest, the pressure at a given point is the same in all directions. Differences or gradients in pressure drive a fluid flow, especially in ducts and pipes.

2.1 Definition of Pressure: Pressure is one of the basic properties of all fluids. Pressure (p) is the force (F) exerted on or by the fluid on a unit of surface area (A). Mathematically expressed:

$$p = \frac{F}{A} \left(\frac{N}{m^2} \right)$$

The basic unit of pressure is Pascal (Pa). When a fluid exerts a force of 1 N over an area of $1m^2$, the pressure equals one Pascal, i.e., $1 Pa = 1 N/m^2$. Pascal is a very small unit, so that for typical power plant application, we use larger units:

Units: 1 kilopascal (kPa) = 10^3 Pa, and

1 megapascal (MPa) = 10^6 Pa = 10^3 kPa.

2.2 Pressure at a Point and Pascal's Law:

Pascal's Principle: Pressure extends uniformly in all directions in a fluid.

By considering the equilibrium of a small triangular wedge of fluid extracted from a static fluid body, one can show (Fig.2) that for *any* wedge angle θ , the pressures on the three faces of the wedge are equal in magnitude:

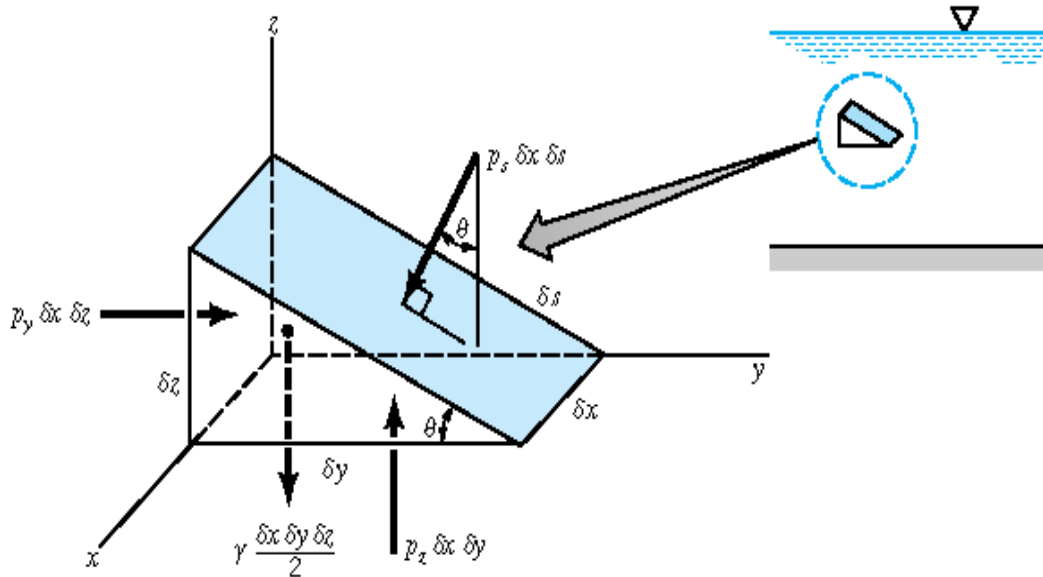


Fig.2 Pascal's Law

Independent of $p_x = p_y = p_z$ independent of ' θ '

Pressure at a point has the same magnitude in all directions, and is called **isotropic**.

This result is known as **Pascal's law**.

2.3 Pascal's Law: In any closed, static fluid system, a pressure change at any one point is transmitted undiminished throughout the system.

2.3.1 Application of Pascal's Law:

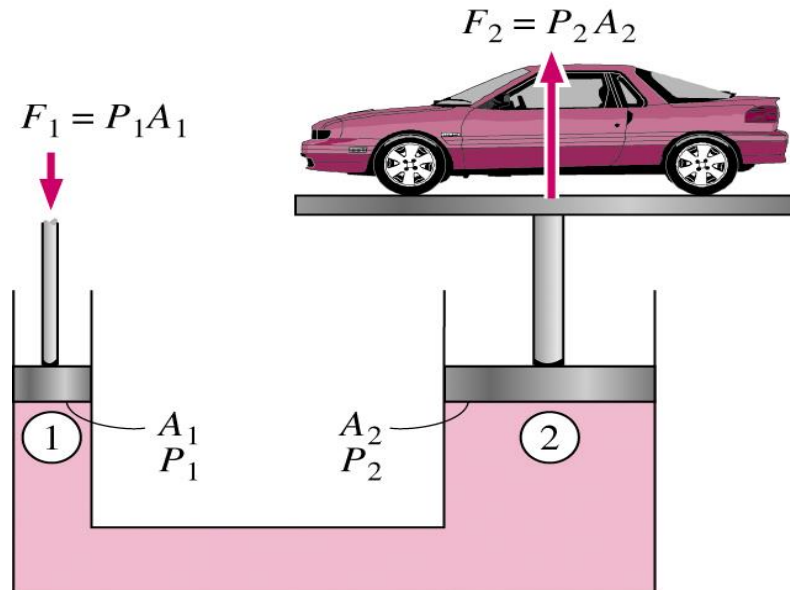


Fig.3 Application of Pascal's Law


- Pressure applied to a confined fluid increases the pressure throughout by the same amount.
- In picture, pistons are at same height:

$$P_1 = P_2 \rightarrow \frac{F_1}{A_1} = \frac{F_2}{A_2} \rightarrow \frac{F_2}{F_1} = \frac{A_2}{A_1}$$

- Ratio A_2/A_1 is called ideal mechanical advantage

2.4 Pressure Variation with Depth:

Consider a small vertical cylinder of fluid in equilibrium, where *positive z is pointing vertically upward*. Suppose the origin $z = 0$ is set at the free surface of the fluid. Then the pressure variation at a depth $z = -h$ below the free surface is governed by

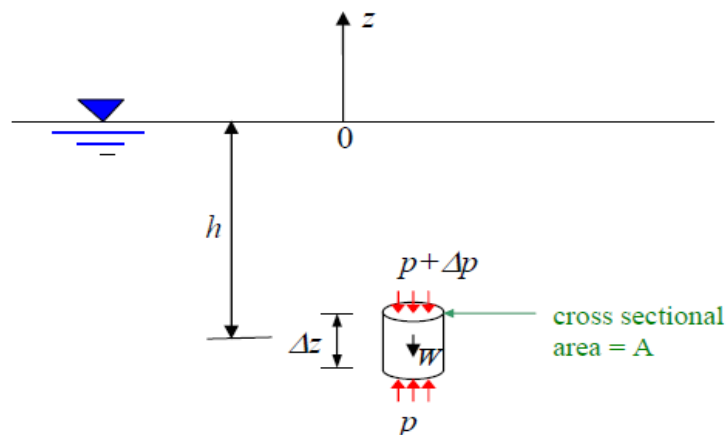

$$\begin{aligned}
(p + \Delta p)A + W &= pA \\
\Rightarrow \Delta pA + \rho g A \Delta z &= 0 \\
\Rightarrow \Delta p &= -\rho g \Delta z \\
\Rightarrow \frac{dp}{dz} &= -\rho g \quad \text{or} \quad \frac{dp}{dz} = -\gamma \quad \text{Eq.(1)} \quad (\text{as } \Delta z \rightarrow 0)
\end{aligned}$$

Therefore, the hydrostatic pressure increases linearly with depth at the rate of the specific weight $\gamma = \rho g$ of the fluid.

Homogeneous fluid: ρ is constant

By simply integrating the above equation-1:

$$\int dp = - \int \rho g dz \Rightarrow p = -\rho g z + C$$

Where C is constant of integration

When $z = 0$ (on the free surface), $p = C = p_0 =$ (the atmospheric pressure).

Hence,

$$p = -\rho g z + p_0$$

Pressure given by this equation is called **ABSOLUTE PRESSURE**, i.e., measured above perfect vacuum.

However, for engineering purposes, it is more convenient to measure the pressure above a datum pressure at atmospheric pressure. By setting $p_0 = 0$,

$$p = -\rho g z + 0 = -\rho g z = \rho g h$$

$$p = \gamma h$$

The equation derived above shows that when the density is constant, **the pressure in a liquid at rest increases linearly with depth from the free surface.**

For a given pressure intensity 'h' will be different for different liquids since, ' γ ' will be different for different liquids.

$$\therefore h = \frac{P}{\gamma}$$

Hint-1: To convert head of 1 liquid to head of another liquid.

$$S = \frac{\gamma}{\gamma_{\text{Standard}}}$$

$$S_1 = \frac{\gamma_1}{\gamma_{\text{Standard}}}$$

$$p = \gamma_1 h_1$$

$$\therefore \gamma_1 = S_1 \gamma_{\text{Standard}}$$

$$p = \gamma_2 h_2$$

$$\gamma_{21} = S_2 \gamma_{\text{Standard}}$$

$$\gamma_1 h_1 = \gamma_2 h_2$$

$$\therefore S_1 \gamma_{\text{Standard}} h_1 = S_2 \gamma_{\text{Standard}} h_2$$

$$S_1 h_1 = S_2 h_2$$

Hint: 2

$$S_{\text{water}} \times h_{\text{water}} = S_{\text{liquid}} \times h_{\text{liquid}}$$

$$1 \times h_{\text{water}} = S_{\text{liquid}} \times h_{\text{liquid}}$$

$$h_{\text{water}} = S_{\text{liquid}} \times h_{\text{liquid}}$$

Pressure head in meters of water is given by the product of pressure head in meters of liquid and specific gravity of the liquid.

Eg: 10meters of oil of specific gravity 0.8 is equal to $10 \times 0.8 = 8$ meters of water.

Eg: Atm pressure is 760mm of Mercury.

NOTE: $P = \gamma h$

↓	↓	↓
kPa	$\frac{kN}{m^3}$	m

Solved Examples:

Ex. 1. Calculate intensity of pressure due to a column of 0.3m of (a) water (b) Mercury
(c) Oil of specific gravity-0.8.

Soln: (a) Given: $h = 0.3\text{m}$ of water

$$\gamma_{\text{water}} = 9.81 \frac{\text{kN}}{\text{m}^3}$$

$$p = ?$$

$$p_{\text{water}} = \gamma_{\text{water}} h_{\text{water}}$$

$$p_{\text{water}} = 2.943 \text{ kPa}$$

(b) Given: $h = 0.3\text{m}$ of Hg

$$\gamma_{\text{mercury}} = \text{Sp.Gr. of Mercury} \times \gamma_{\text{water}} = 13.6 \times 9.81$$

$$\gamma_{\text{mercury}} = 133.416 \text{ kN/m}^3$$

$$p_{\text{mercury}} = \gamma_{\text{mercury}} h_{\text{mercury}}$$

$$= 133.416 \times 0.3$$

$$p = 40.025 \text{ kPa or } 40.025 \text{ kN/m}^2$$

(c) Given: $h = 0.3$ of Oil Sp.Gr. = 0.8

$$\gamma_{\text{oil}} = \text{Sp.Gr. of Oil} \times \gamma_{\text{water}} = 0.8 \times 9.81$$

$$\gamma_{\text{oil}} = 7.848 \text{ kN/m}^3$$

$$p_{\text{oil}} = \gamma_{\text{oil}} h_{\text{oil}}$$

$$= 7.848 \times 0.3$$

$$p_{\text{oil}} = 2.3544 \text{ kPa or } 2.3544 \text{ kN/m}^2$$

Ex.2. Intensity of pressure required at a point is 40kPa. Find corresponding head in

(a) water (b) Mercury (c) oil of specific gravity-0.9.

Solution: Given Intensity of pressure at a point 40 kPa i.e. $p = 40 \text{ kN/m}^2$

(a) Head of water $h_{\text{water}} = ?$

$$h_{\text{water}} = \frac{p}{\gamma_{\text{water}}} = \frac{40}{9.81}$$

$$h_{\text{water}} = 4.077 \text{ m of water}$$

(b) Head of mercury 'h_{mercury}'=?

$$\gamma_{\text{mercury}} = \text{Sp.Gr. of Mercury} \times \gamma_{\text{water}} = 13.6 \times 9.81$$

$$\gamma_{\text{mercury}} = 133.416 \text{ kN/m}^3$$

$$h_{\text{mercury}} = \frac{p}{\gamma_{\text{mercury}}} = \frac{40}{133.416}$$

$$h_{\text{water}} = 0.3 \text{ m of mercury}$$

(c) Head of oil 'h_{oil}'=?

$$\gamma_{\text{oil}} = \text{Sp.Gr. of Oil} \times \gamma_{\text{water}} = 0.9 \times 9.81$$

$$\gamma_{\text{oil}} = 8.829 \text{ kN/m}^3$$

$$h_{\text{oil}} = \frac{p}{\gamma_{\text{oil}}} = \frac{40}{8.829}$$

$$h_{\text{oil}} = 4.53 \text{ m of oil}$$

Ex.3 Standard atmospheric pressure is 101.3 kPa Find the pressure head in (i) Meters of water (ii) mm of mercury (iii) m of oil of specific gravity 0.6.

(i) Meters of water h_{water}

$$p = \gamma_{\text{water}} h_{\text{water}}$$

$$101.3 = 9.81 \times h_{\text{water}}$$

$$h_{\text{water}} = 10.3 \text{ m of water}$$

(ii) Meters of water h_{water}

$$p = \gamma_{\text{mercury}} \times h_{\text{mercury}}$$

$$101.3 = (13.6 \times 9.81) \times h_{\text{mercury}}$$

$$h = 0.76 \text{ m of mercury}$$

(iii) p = γ_{oil} h_{oil}

$$101.3 = (0.6 \times 9.81) \times h$$

$$h = 17.21 \text{ m of oil of } S = 0.6$$

Ex.4 An open container has water to a depth of 2.5m and above this an oil of S = 0.85 for a depth of 1.2m. Find the intensity of pressure at the interface of two liquids and at the bottom of the tank.

(i) At the Oil - water interface

$$p_A = \gamma_{\text{oil}} h_{\text{oil}} = (0.85 \times 9.81) \times 1.2$$

$$p_A = 10 \text{ kPa}$$


(ii) At the bottom of container

$$p_B = \gamma_{\text{oil}} h_{\text{oil}} + \gamma_{\text{water}} h_{\text{water}}$$

$$p_B = p_A + \gamma_{\text{water}} h_{\text{water}}$$

$$p_B = 10 \text{ kPa} + 9.81 \times 2.5$$

$$p_B = 34.525 \text{ kPa}$$

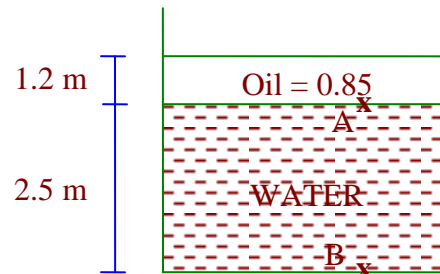


2.5 Types of Pressure: Air above the surface of liquids exerts pressure on the exposed surface of the liquid and normal to the surface.

- **Atmospheric pressure**

The pressure exerted by the atmosphere is called atmospheric pressure. Atmospheric pressure at a place depends on the elevation of the place and the temperature.

Atmospheric pressure is measured using an instrument called 'Barometer' and hence atmospheric pressure is also called Barometric pressure. *However, for engineering purposes, it is more convenient to measure the pressure above a datum pressure at atmospheric pressure.* By setting $p_{\text{atmophere}} = 0$,



$$p = -\rho gz = \rho gh$$

Unit: kPa . 'bar' is also a unit of atmospheric pressure 1-bar = 100 kPa.= 1 kg/cm²

- **Absolute pressure:** Absolute pressure at a point is the intensity of pressure at that point measured with reference to absolute vacuum or absolute zero pressure. Absolute pressure at a point is the intensity of pressure at that point measured with reference to absolute vacuum or absolute zero pressure (Fig.4) .

Absolute pressure at a point can never be negative since there can be no pressure less than absolute zero pressure.

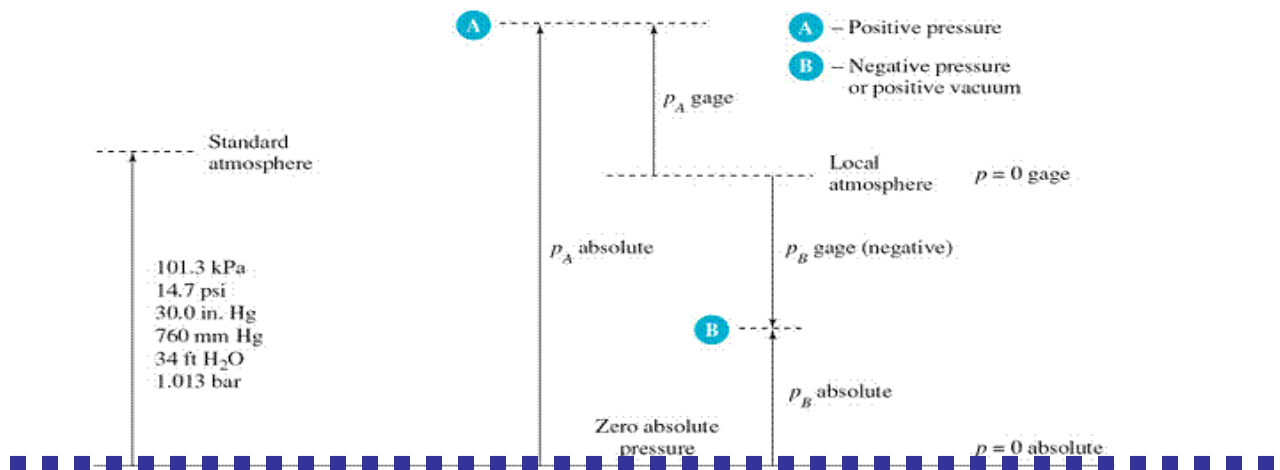


Fig.4 Definition of Absolute Pressure, Gauge Pressure and Vacuum Pressure

Gauge Pressure: If the intensity of pressure at a point is measurement with reference to atmosphere pressure, then it is called gauge pressure at that point.

Gauge pressure at a point may be more than the atmospheric pressure or less than the atmospheric pressure. Accordingly gauge pressure at the point may be positive or negative (Fig.4)

Negative gauge pressure: It is also called vacuum pressure. From the figure, It is the pressure measured below the gauge pressure (Fig.4).

Absolute pressure at a point = Atmospheric pressure ± Gauge pressure


NOTE: If we measure absolute pressure at a Point below the free surface of the liquid,

then, p_2 (absolute) = $\gamma \cdot h + p_{atm}$ $p_1 = p_{atm}$


If gauge pressure at a point is required, then atmospheric pressure is taken as zero, then,

p_2 (gauge) = $\gamma \cdot h = \rho gh$

notes4free.in

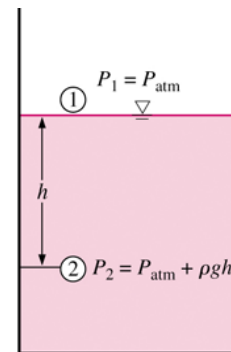

Also, the pressure is the same at all points with the same depth from the free surface regardless of geometry, provided that the points are interconnected by the same fluid. However, the thrust due to pressure is perpendicular to the surface on which the pressure acts, and hence its direction depends on the geometry.

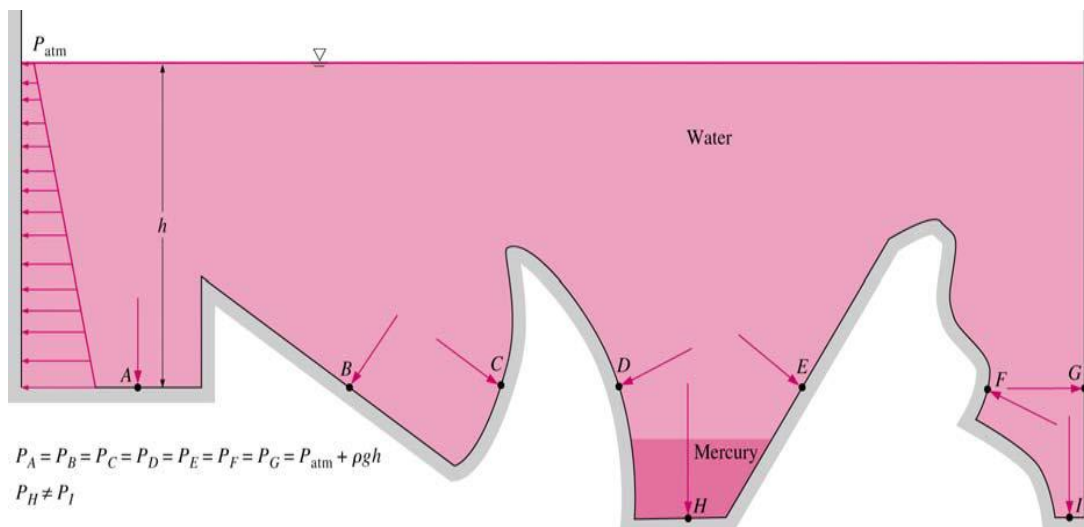

Solved Example: Convert the following absolute pressure to gauge pressure:

- (a) 120kPa (b) 3kPa (c) 15m of H₂O (d) 800mm of Hg.

Solution:

- (a) $p_{\text{abs}} = p_{\text{atm}} + p_{\text{gauge}}$
 $\therefore p_{\text{gauge}} = p_{\text{abs}} - p_{\text{atm}} = 120 - 101.3 = 18.7 \text{ kPa}$
- (b) $p_{\text{gauge}} = 3 - 101.3 = -98.3 \text{ kPa}$
 $p_{\text{gauge}} = 98.3 \text{ kPa (vacuum)}$
- (c) $h_{\text{abs}} = h_{\text{atm}} + h_{\text{gauge}}$
 $15 = 10.3 + h_{\text{gauge}}$
 $h_{\text{gauge}} = 4.7 \text{ m of water}$
- (d) $h_{\text{abs}} = h_{\text{atm}} + h_{\text{gauge}}$
 $800 = 760 + h_{\text{gauge}}$
 $h_{\text{gauge}} = 40 \text{ mm of mercury}$

2.6 Vapour Pressure:

Vapor pressure is defined as the pressure at which a liquid will boil (vaporize) and is in equilibrium with its own vapor. Vapor pressure rises as temperature rises. For example, suppose you are camping on a high mountain (say 3,000 m in altitude); the atmospheric pressure at this elevation is about 70 kPa and the boiling temperature is around 90°C. This has consequences for cooking. For example, eggs have to be cooked longer at elevation to become hard-boiled since they cook at a lower temperature.

A pressure cooker has the opposite effect. Namely, the tight lid on a pressure cooker causes the pressure to increase above the normal atmospheric value. This causes water to boil at a temperature even greater than 100°C; eggs can be cooked a lot faster in a pressure cooker!

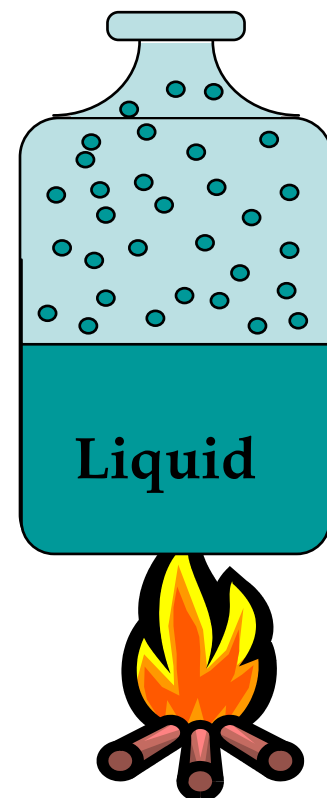


Fig.5


Vapor pressure is important to fluid flows because, in general, pressure in a flow decreases as velocity increases. This can lead to **cavitation**, which is generally destructive and undesirable. In particular, at high speeds the local pressure of a liquid sometimes drops below the vapor pressure of the liquid. In such a case, **cavitation** occurs. In other words, a "cavity" or bubble of vapor appears because the liquid vaporizes or boils at the location where the pressure dips below the local vapor pressure.

Cavitation is not desirable for several reasons. First, it causes noise (as the cavitation bubbles collapse when they migrate into regions of higher pressure). Second, it can lead to inefficiencies and reduction of heat transfer in pumps and turbines (turbo machines). Finally, the collapse of these cavitation bubbles causes pitting and corrosion of blades and other surfaces nearby. The left figure below shows a cavitating propeller in a water tunnel, and the right figure shows cavitation damage on a blade.

2.7 Measurement of Pressure: Measurement of pressure

- Barometer
- Simple manometer
- Piezometer column
- Bourdon gage
- Pressure transducer

2.7.1 Barometer: A *barometer* is a device for measuring atmospheric pressure. A simple barometer consists of a tube more than 760 mm long inserted in an open container of mercury with a closed and evacuated end at the top and open tube end at the bottom and with mercury extending from the container up into the tube.



Strictly, the space above the liquid cannot be a true vacuum. It contains mercury vapor at its saturated vapor pressure, but this is extremely small at room temperatures (e.g. 0.173 Pa at 20°C). The atmospheric pressure is calculated from the relation $P_{atm} = \rho g h$ where ρ is the density of fluid in the barometer.

$$P_{atm} = \gamma_{mercury} \times y + P_{vapor} = P_{atm}$$

With negligible $P_{vapor} = 0$

$$P_{atm} = \gamma_{mercury} \times y$$

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka


2.7.2 Simple Manometer: Simple monometers are used to measure intensity of pressure at a point. They are connected to the point at which the intensity of pressure is required. Such a point is called gauge point

◆ Types of Simple Manometers

Common types of simple manometers are

- a) Piezometers
- b) U-tube manometers
- c) Single tube manometers
- d) Inclined tube manometers

a) Piezometers

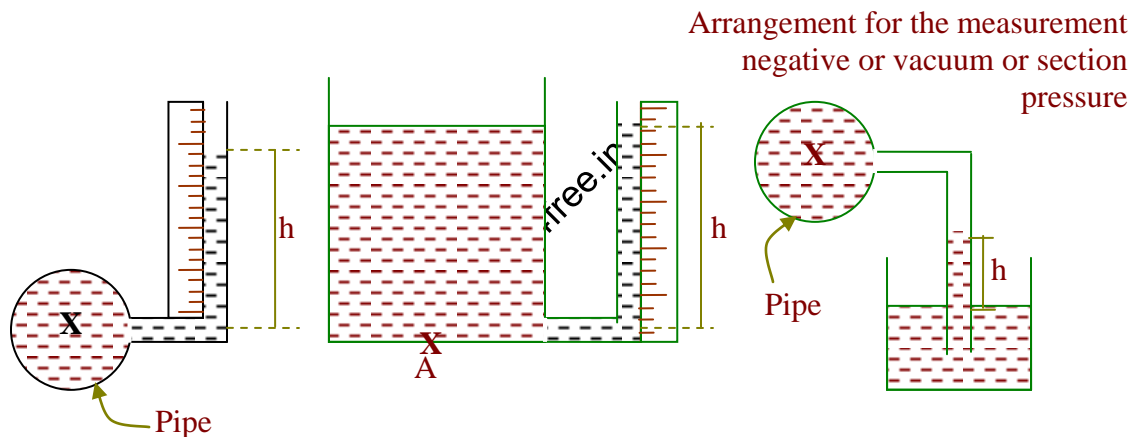

Piezometer consists of a glass tube inserted in the wall of the vessel or pipe at the level of point at which the intensity of pressure is to be measured. The other end of the piezometer is exposed to air. The height of the liquid in the piezometer gives the pressure head from which the intensity of pressure can be calculated.

To minimize capillary rise effects the diameters of the tube is kept more than 12mm.


Merits

- Simple in construction
- Economical

Demerits

- Not suitable for high pressure intensity.
- Pressure of gases cannot be measured.

(b) U-tube Manometers:

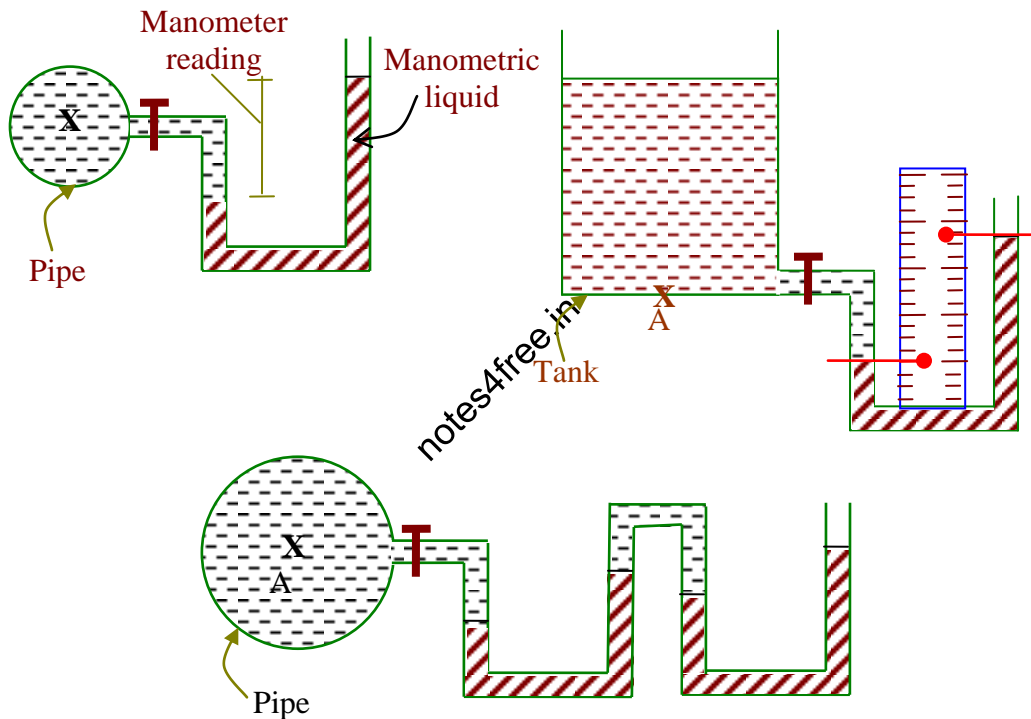

A U-tube manometers consists of a glass tube bent in U-Shape, one end of which is connected to gauge point and the other end is exposed to atmosphere. U-tube consists of a liquid of specific of gravity other than that of fluid whose pressure intensity is to be measured and is called monometric liquid.

- **Manometric liquids**

- ◆ Manometric liquids should neither mix nor have any chemical reaction with the fluid whose pressure intensity is to be measured.
- ◆ It should not undergo any thermal variation.
- ◆ Manometric liquid should have very low vapour pressure.
- ◆ Manometric liquid should have pressure sensitivity depending upon the magnitude. Of pressure to be measured and accuracy requirement.

Gauge equations are written for the system to solve for unknown quantities.


- **To write the gauge equation for manometers**

Steps:

1. Convert all given pressure to meters of water and assume unknown pressure in meters of waters.
2. Starting from one end move towards the other keeping the following points in mind.
 - ◆ Any horizontal movement inside the same liquid will not cause change in pressure.
 - ◆ Vertically downward movement causes increase in pressure and upward motion cause decrease in pressure.
 - ◆ Convert all vertical columns of liquids to meters of water by multiplying them by corresponding specific gravity.
 - ◆ Take atmospheric pressure as zero (gauge pressure computation).
3. Solve for the unknown quantity and convert it into the required unit.

Solved Problem:

1. Determine the pressure at A for the U- tube manometer shown in fig. Also calculate the absolute pressure at A in kPa.

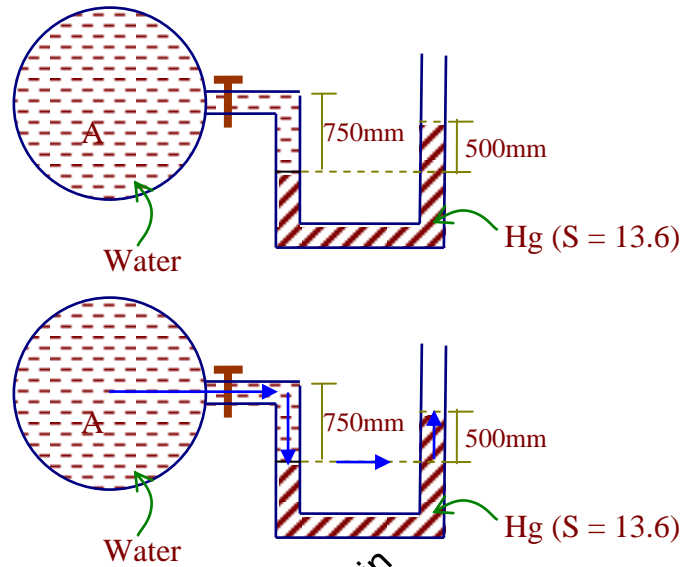

Let ' h_A ' be the pressure head at 'A' in 'meters of water'.

$$h_A + 0.75 - 0.5 \times 13.6 = 0$$

$$h_A = 6.05 \text{ m of water}$$

$$p = \gamma h$$

$$= 9.81 \times 6.05$$


$$p = 59.35 \text{ kPa (gauge pressure)}$$

$$P_{abs} = P_{atm} + P_{gauge}$$

$$= 101.3 + 59.35$$

$$P_{abs} = 160.65 \text{ kPa}$$

2. For the arrangement shown in figure, determine gauge and absolute pressure at the point M.

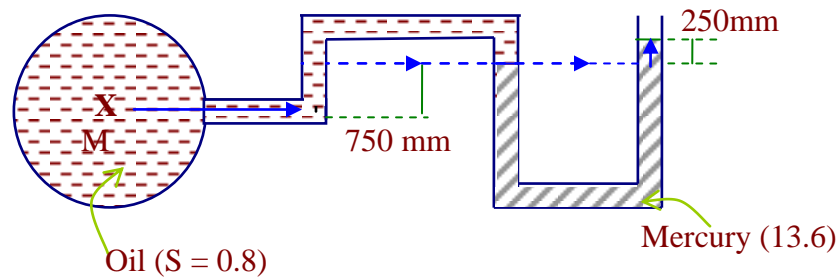

Let ' h_M ' be the pressure head at the point 'M' in m of water,

$$h_M - 0.75 \times 0.8 - 0.25 \times 13.6 = 0$$

$$h_M = 4 \text{ m of water}$$


$$p = \gamma h$$

$$p = 39.24 \text{ kPa}$$

$$p_{\text{abs}} = 101.3 + 39.24$$

$$p_{\text{abs}} = 140.54 \text{ kPa}$$

3. If the pressure at 'A' is 10 kPa (Vacuum) what is the value of 'x'?

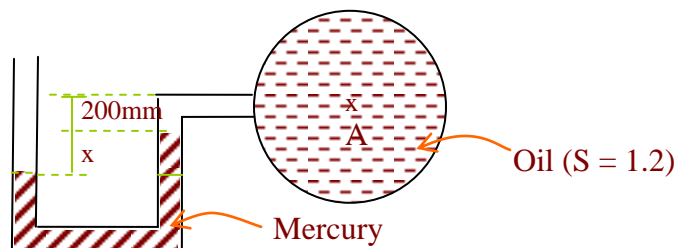

$$p_A = 10 \text{ kPa (Vacuum)}$$

$$p_A = -10 \text{ kPa}$$


$$\frac{p_A}{\gamma} = \frac{-10}{9.81} = -1.019 \text{ m of water}$$

$$h_A = -1.019 \text{ m of water}$$

$$-1.019 + 0.2 \times 1.2 + x(13.6) = 0$$

$$x = 0.0572 \text{ m}$$

4. The tank in the accompanying figure consists of oil of $S = 0.75$. Determine the pressure gauge reading in $\frac{kN}{m^2}$.

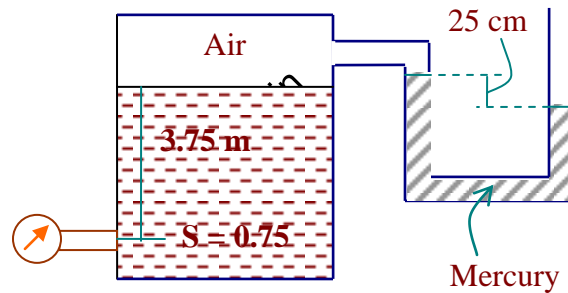

Let the pressure gauge reading be 'h' m of water

$$h - 3.75 \times 0.75 + 0.25 \times 13.6 = 0$$


$$h = -0.5875 \text{ m of water}$$

$$p = \gamma h$$

$$p = -5.763 \text{ kPa}$$

$$p = 5.763 \text{ kPa (Vacuum)}$$

5. A closed tank is 8m high. It is filled with Glycerine up to a depth of 3.5m and linseed oil to another 2.5m. The remaining space is filled with air under a pressure of 150 kPa. If a pressure gauge is fixed at the bottom of the tank what will be its reading. Also calculate absolute pressure. Take relative density of Glycerine and Linseed oil as 1.25 and 0.93 respectively.

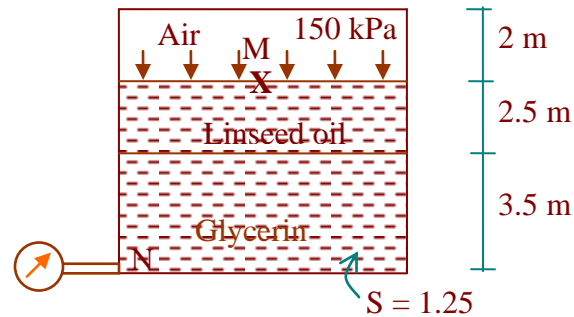

$$P_H = 150 \text{ kPa}$$

$$h_M = \frac{150}{9.81}$$

$$h_M = 15.29 \text{ m of water}$$

Let ' h_N ' be the pressure gauge reading in m of water.

$$h_N - 3.5 \times 1.25 - 2.5 \times 0.93 = 15.29$$

$$h_N = 21.99 \text{ m of water}$$

$$p = 9.81 \times 21.99$$

$$p = 215.72 \text{ kPa (gauge)}$$

$$p_{\text{abs}} = 317.02 \text{ kPa}$$


6. A vertical pipe line attached with a gauge and a manometer contains oil and Mercury as shown in figure. The manometer is opened to atmosphere. What is the gauge reading at 'A'? Assume no flow in the pipe.

$$h_A - 3 \times 0.9 + 0.375 \times 0.9 - 0.375 \times 13.6 = 0$$

$$h_A = 2.0625 \text{ m of water}$$

$$p = \gamma \times h$$

$$= 9.81 \times 21.99$$

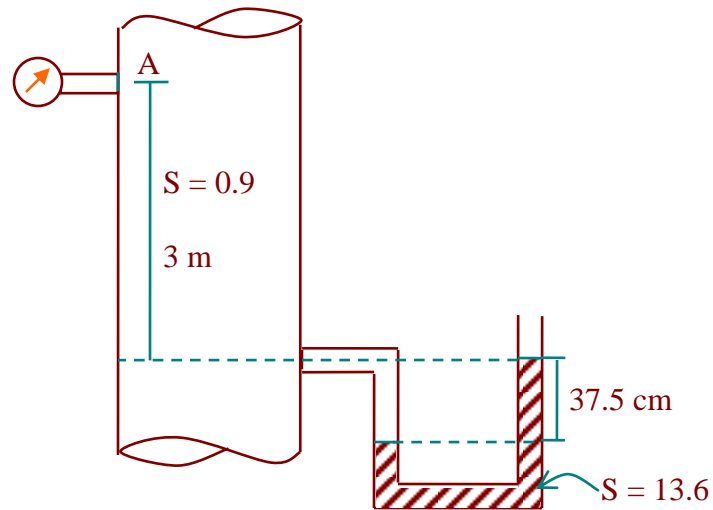

$$p = 20.23 \text{ kPa (gauge)}$$

$$p_{\text{abs}} = 101.3 + 20.23$$


$$p_{\text{abs}} = 121.53 \text{ kPa}$$

• DIFFERENTIAL MANOMETERS

Differential manometers are used to measure pressure difference between any two points. Common varieties of differential manometers are:

- Two piezometers.
- Inverted U-tube manometer.
- U-tube differential manometers.
- Micro manometers.


(a) Two Piezometers

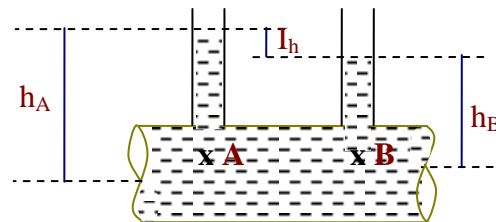

The arrangement consists of two piezometers at the two points between which the pressure difference is required. The liquid will rise in both the piezometers. The difference in elevation of liquid levels can be recorded and the pressure difference can be calculated. It has all the merits and demerits of piezometer.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

(b) **Inverted U-tube manometers:**

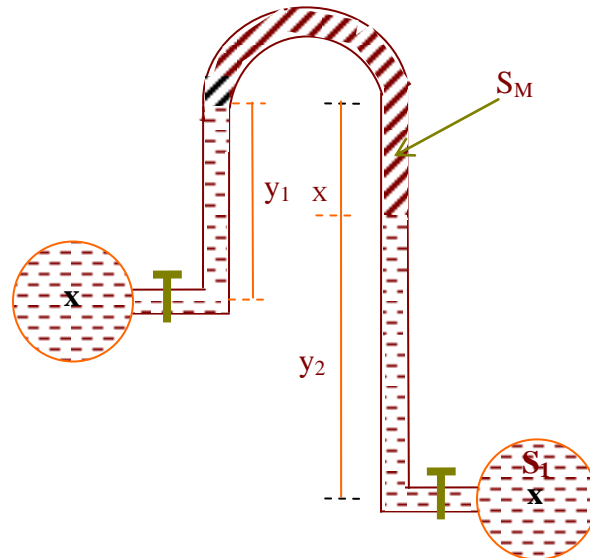

Inverted U-tube manometer is used to measure small difference in pressure between any two points. It consists of an inverted U-tube connecting the two points between which the pressure difference is required. In between there will be a lighter sensitive manometric liquid. Pressure difference between the two points can be calculated by writing the gauge equations for the system.


Let 'h_A' and 'h_B' be the pressure head at 'A' and 'B' in meters of water

$$h_A - (y_1 S_1) + (x S_M) + (y_2 S_2) = h_B.$$

$$h_A - h_B = S_1 y_1 - S_M x - S_2 y_2,$$

$$p_A - p_B = \gamma (h_A - h_B)$$

(c) **U-tube Differential manometers**

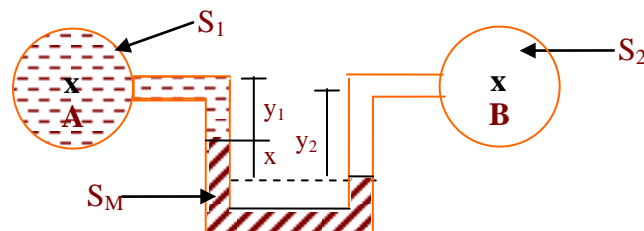

A differential U-tube manometer is used to measure pressure difference between any two points. It consists of a U-tube containing heavier manometric liquid, the two limbs of which are connected to the gauge points between which the pressure difference is required.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

is required. U-tube differential manometers can also be used for gases. By writing the gauge equation for the system pressure difference can be determined.

Let 'h_A' and 'h_B' be the pressure head of 'A' and 'B' in meters of water


$$h_A + S_1 Y_1 + x S_M - Y_2 S_2 = h_B$$

$$h_A - h_B = Y_2 S_2 - Y_1 S_1 - x S_M$$

Solved Problems:

(1) An inverted U-tube manometer is shown in figure. Determine the pressure difference between A and B in N/M².

Let h_A and h_B be the pressure heads at A and B in meters of water.

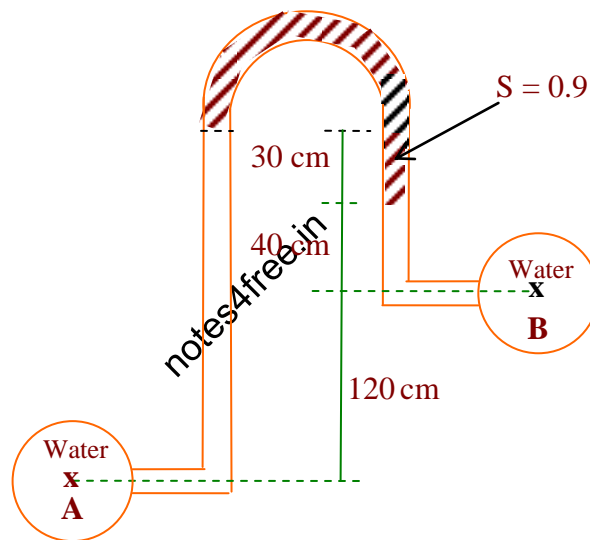

$$h_A - (1.90 \times 10^{-2}) + (0.3 \times 0.9) + (0.4) 0.9 = h_B$$


$$h_A - h_B = 1.23 \text{ meters of water}$$

$$p_A - p_B = \gamma (h_A - h_B) = 9.81 \times 1.23$$


$$p_A - p_B = 12.06 \text{ kPa}$$

$$p_A - p_B = 12.06 \times 10^3 \text{ N/m}^2$$

2. In the arrangements shown in figure. Determine the 'h'.

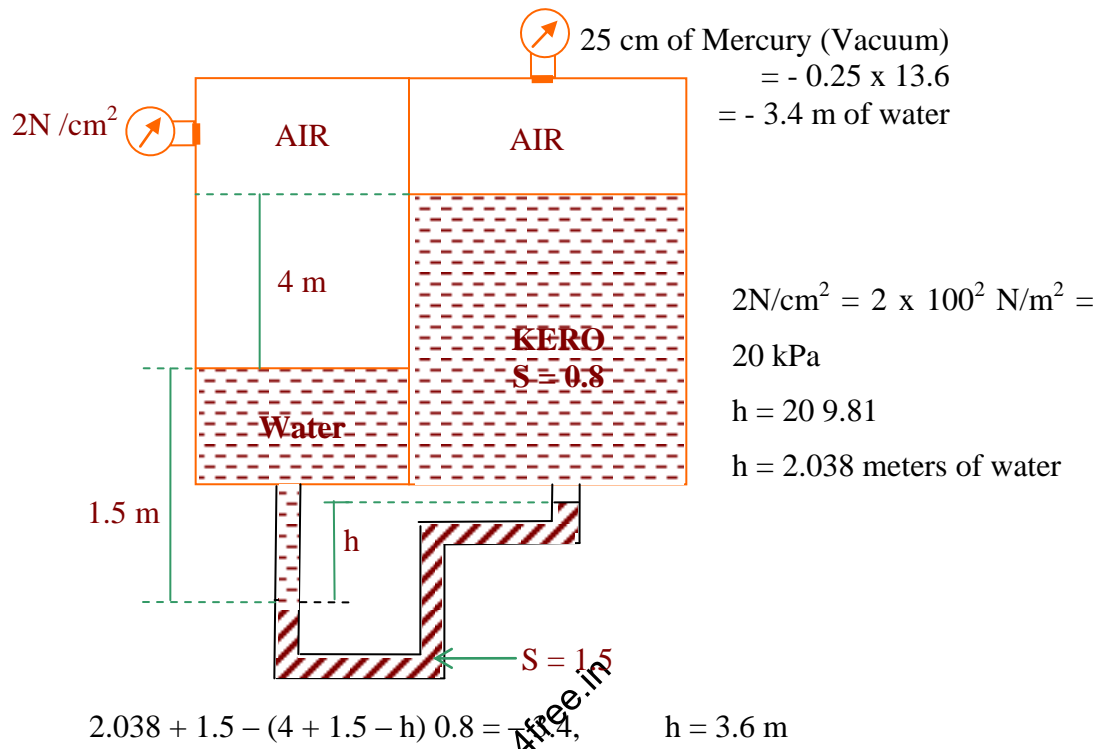

3. In figure given, the air pressure in the left tank is 230 mm of Mercury (Vacuum). Determine the elevation of gauge liquid in the right limb at A. If liquid in the right tank is water.

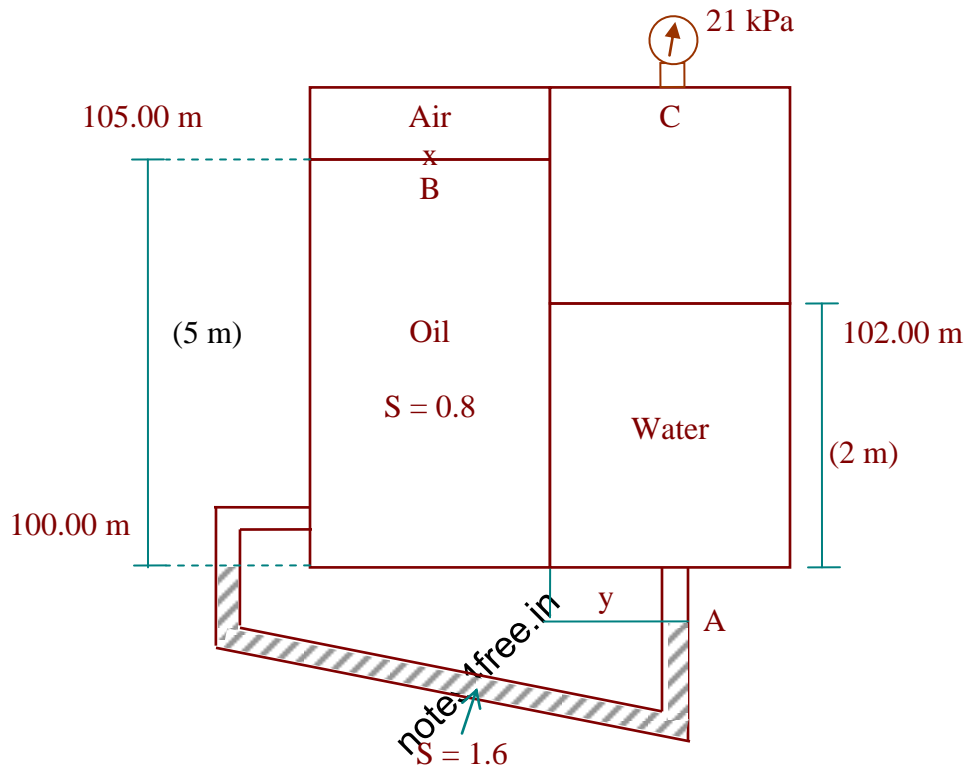

$$h_c = \frac{P_c}{\gamma}$$

$$h_B = 230 \text{ mm of Hg}$$

$$\frac{21}{9.81}$$

$$h_c = 2.14 \text{ m of water}$$

$$= 0.23 \times 13.6$$

$$h_B = -3.128 \text{ m of water}$$

$$-3.128 + 5 \times 0.8 + y \times 1.6 - (y + 2) = 2.14$$


$$-3.128 + 5 \times 0.8 + y \times 1.6 - y - 2 = 2.14$$

$$y = 5.446 \text{ m}$$

$$\therefore \text{Elevation of A} = 100 - 5.446$$

$$\text{Elevation of A} = 94.553 \text{ m}$$

4. Compute the pressure different between 'M' and 'N' for the system shown in figure.

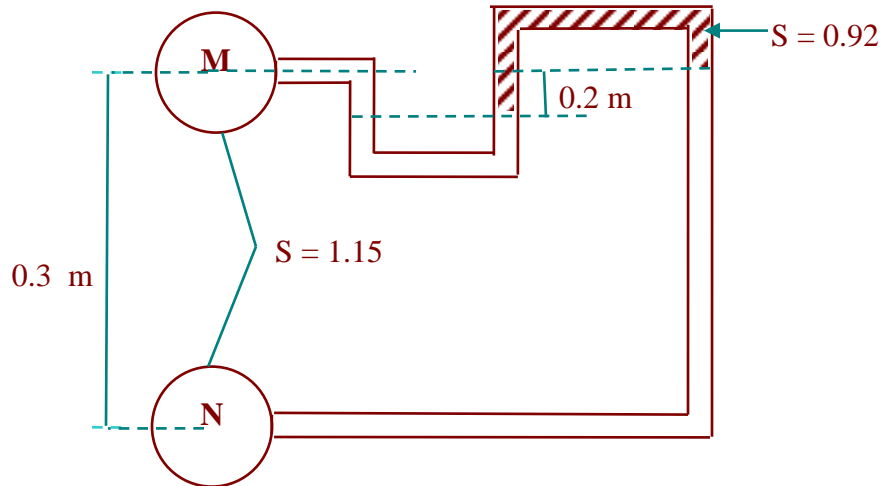

Let ' h_M ' and ' h_N ' be the pressure heads at M and N in m of water.

$$h_M + y \times 1.15 - 0.2 \times 0.92 + (0.3 - y + 0.2) 1.15 = h_N$$

$$h_M + 1.15 y - 0.184 + 0.3 \times 1.15 - 1.15 y + 0.2 \times 1.15 = h_N$$

$$h_M + 0.391 = h_N$$


$$h_N - h_M = 0.391 \text{ meters of water}$$

$$p_n - p_m = \gamma (h_N - h_M)$$

$$= 9.81 \times 0.391$$

$$p_n - p_m = 3.835 \text{ kPa}$$

5. Petrol of specific gravity 0.8 flows up through a vertical pipe. A and B are the two points in the pipe, B being 0.3 m higher than A. Connection are led from A and B to a U-tube containing Mercury. If the pressure difference between A and B is 18 kPa, find the reading of manometer.

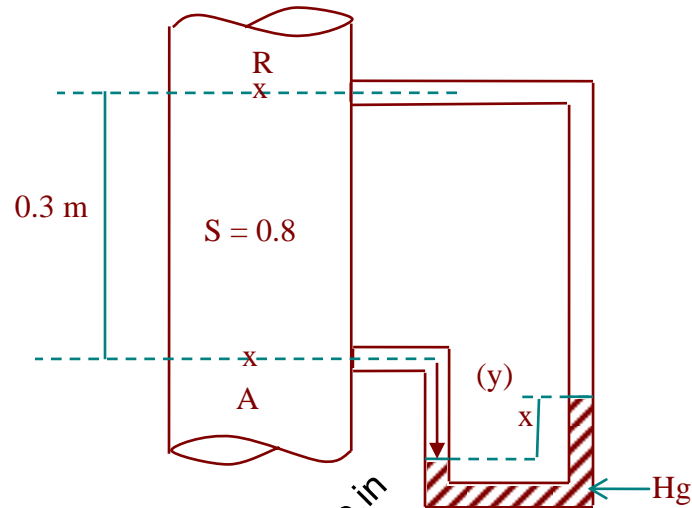

$$p_A - p_B = 18 \text{ kPa}$$

$$\frac{P_A - P_B}{\gamma}$$

$$h_A - h_B = \frac{18}{9.81}$$

$$h_A - h_B = 1.835 \text{ m of water}$$

$$h_A + y \times 0.8 - x \times 13.6 - (0.3 + y - x) \times 0.8 = h_B$$

$$h_A - h_B = -0.8y + 13.66x + 0.24 + 0.8y - 0.8x$$

$$h_A - h_B = 12.8x + 0.24$$

$$1.835 = 12.8x + 0.24$$


$$x = 0.1246 \text{ m}$$

6. A cylindrical tank contains water to a height of 50mm. Inside is a small open cylindrical tank containing kerosene at a height specify gravity 0.8. The following pressures are known from indicated gauges.

$$p_B = 13.8 \text{ kPa (gauge)}$$

$$p_C = 13.82 \text{ kPa (gauge)}$$

Determine the gauge pressure p_A and height h . Assume that kerosene is prevented from moving to the top of the tank.

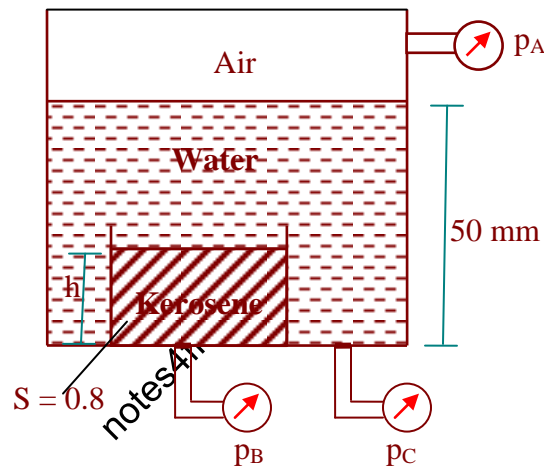

$$p_C = 13.82 \text{ kPa}$$

$$h_C = 1.409 \text{ m of water}$$

$$p_B = 13.8 \text{ kPa}$$

$$h_B = 1.407 \text{ meters of water}$$

$$1.409 - 0.05 = h_A \quad \therefore h_A = 1.359 \text{ meters of water}$$

$$\therefore p_A = 1.359 \times 9.81$$

$$\therefore p_A = 13.33 \text{ kPa}$$

$$h_B - h \times 0.8 - (0.05 - h) = h_A$$


$$1.407 - 0.8 h - 0.05 + h = 1.359$$

$$0.2 h = 1.359 - 1.407 + 0.05$$

$$0.2 h = 0.002$$

$$h = 0.02 \text{ m}$$

7. Find the pressure different between A and B if $d_1 = 300\text{mm}$, $d_2 = 150\text{mm}$, $d_3 = 460\text{mm}$, $d_4 = 200\text{mm}$ and 13.6 .

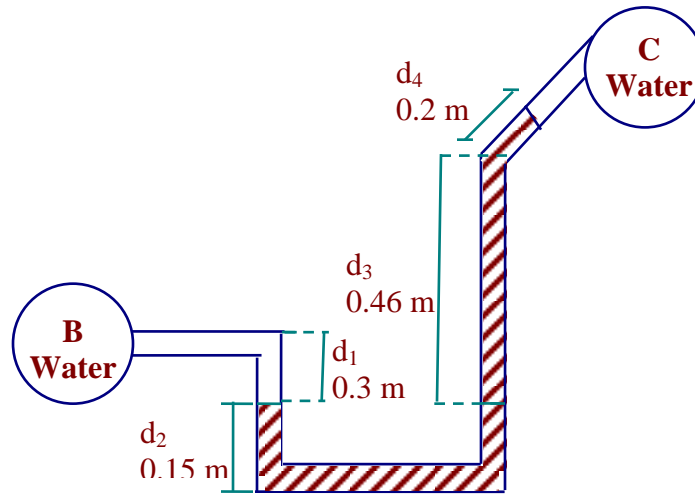

Let h_A and h_B be the pressure head at A and B in m of water.


$$h_A + 0.3 - (0.46 + 0.2 \sin 45) 13.6 = h_B$$

$$h_A - h_B = 7.88\text{m of water}$$

$$p_A - p_B = (7.88 \times 9.81)$$

$$p_A - p_B = 77.29 \text{ kPa}$$

8. What is the pressure p_A in the fig given below? Take specific gravity of oil as 0.8.

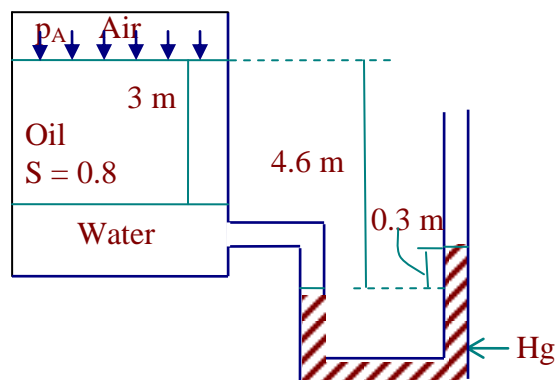


$$h_A + (3 \times 0.8) + (4.6 - 0.3) (13.6) = 0$$

$$h_A = 2.24 \text{ m of oil}$$

$$p_A = 9.81 \times 2.24$$

$$p_A = 21.97 \text{ kPa}$$

9. Find 'd' in the system shown in fig. If $p_A = 2.7 \text{ kPa}$

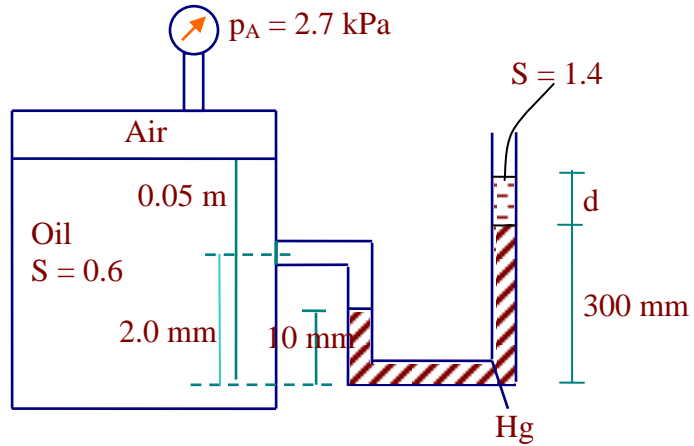

$$h_A = \frac{p_A}{\gamma} = \frac{2.7}{9.81}$$

$$h_A = 0.2752 \text{ m of water}$$

$$h_A + (0.05 \times 0.6) + (0.05 + 0.02 - 0.01)0.6$$

$$+ (0.01 \times 13.6) - (0.03 \times 13.6) - d \times 1.4 = 0$$


$$0.0692 - 1.4d = 0$$

$$d = 0.0494 \text{ m}$$

or

$$d = 49.4 \text{ mm}$$

10. Determine the absolute pressure at 'A' for the system shown in fig.

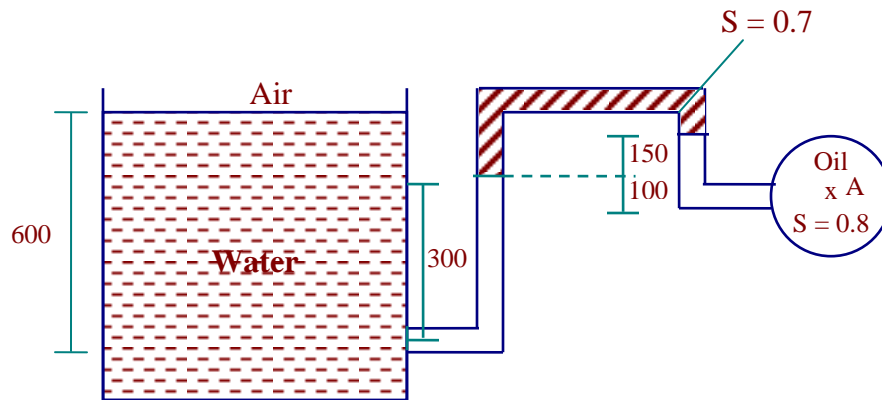

$$h_A - (0.25 \times 0.8) + (0.15 \times 0.7) + (0.3 \times 0.8) - (0.6) = 0$$

$$h_A = 0.455 \text{ m of water}$$

$$p_A = h_A \times 9.81$$


$$p_A = 4.464 \text{ kPa}$$

$$p_{\text{abs}} = 101.3 + 4.464$$

$$p_{\text{abs}} = 105.764 \text{ kPa}$$

SINGLE COLUMN MANOMETER:

Single column manometer is used to measure small pressure intensities.

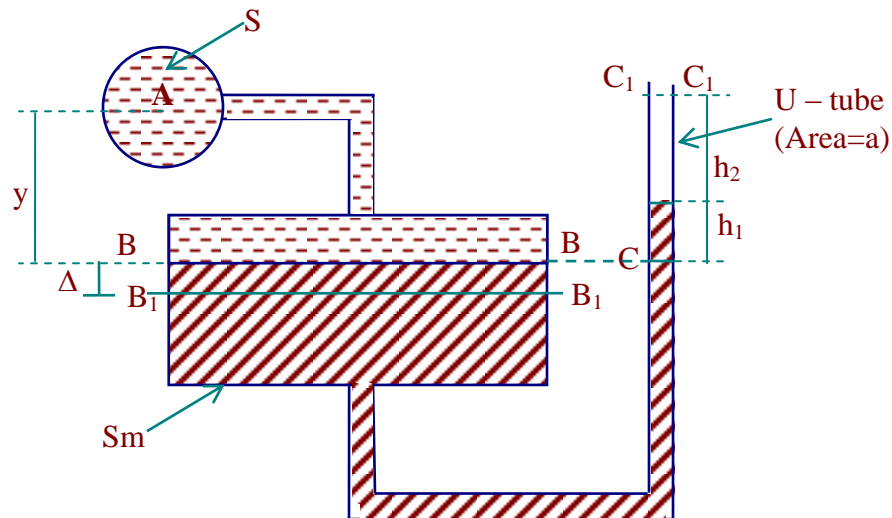

A single column manometer consists of a shallow reservoir having large cross sectional area when compared to cross sectional area of U – tube connected to it. For any change in pressure, change in the level of manometric liquid in the reservoir is small (Δ) and change in level of manometric liquid in the U- tube is large.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

To derive expression for pressure head at A:

BB and CC are the levels of manometric liquid in the reservoir and U-tube before connecting the point A to the manometer, writing gauge equation for the system we have,

$$+ y \times S - h_1 \times S_m = 0$$

$$\therefore Sy = S_m h_1$$

Let the point A be connected to the manometer. B₁B₁ and C₁ C₁ are the levels of manometric liquid. Volume of liquid between B₁B₁ = Volume of liquid between C₁C₁

$$A\Delta = a h_2$$

$$\Delta = \frac{ah_2}{A}$$

Let 'h_A' be the pressure head at A in m of water.

$$h_A + (y + \Delta) S - (\Delta + h_1 + h_2) S_m = 0$$

$$h_A = (\Delta + h_1 + h_2) S_m - (y + \Delta) S$$

$$= \Delta S_m + h_1 S_m + h_2 S_m - yS - \Delta S$$


$$h_A = \Delta (S_m - S) + h_2 S_m$$

$$h_A = \frac{ah_2}{A} (S_m - S) + h_2 S_m$$

∴ It is enough if we take one reading to get 'h₂' If ' $\frac{a}{A}$ ' is made very small (by increasing 'A') then the I term on the RHS will be negligible.

$$\text{Then } h_A = h_2 S_m$$

INCLINED TUBE SINGLE COLUMN MANOMETER:

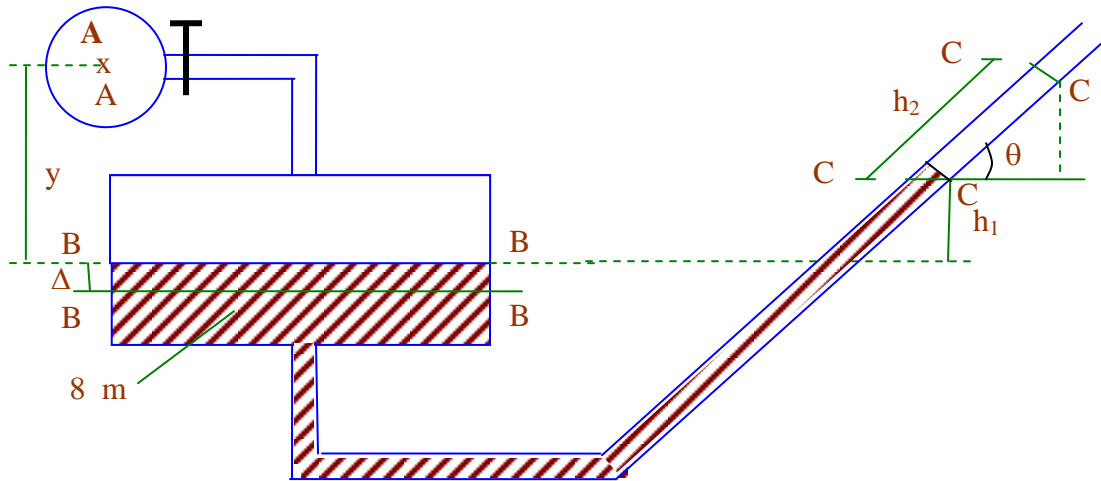

Inclined tube SCM is used to measure small intensity pressure. It consists of a large reservoir to which an inclined U – tube is connected as shown in fig. For small changes in pressure the reading ‘ h_2 ’ in the inclined tube is more than that of SCM. Knowing the inclination of the tube the pressure intensity at the gauge point can be determined.

$$h_A = \frac{a}{A} h_2 \sin \theta (S_m - S) + h_2 \sin \theta \cdot S_m$$


If ‘ $\frac{a}{A}$ ’ is very small then $h_A = (h_2 \sin \theta) S_m$.

2.7.3 MECHANICAL GAUGES:

Pressure gauges are the devices used to measure pressure at a point. They are used to measure high intensity pressures where accuracy requirement is less. Pressure gauges are separate for positive pressure measurement and negative pressure measurement. Negative pressure gauges are called Vacuum gauges.

Mechanical gauge consists of an elastic element which deflects under the action of applied pressure and this deflection will move a pointer on a graduated dial leading to the measurement of pressure. Most popular pressure gauge used is Borden pressure gauge.

BASIC PRINCIPLE:

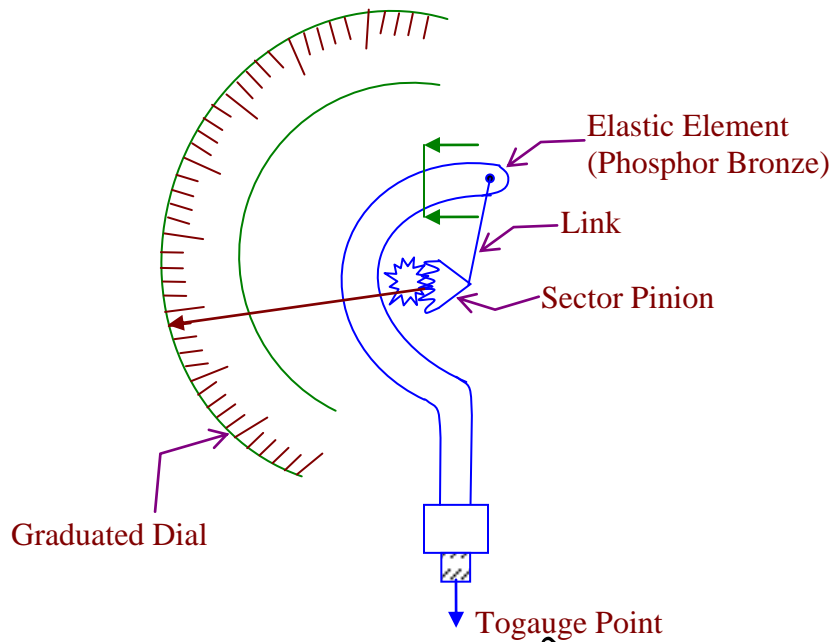


The arrangement consists of a pressure responsive element made up of phosphor bronze or special steel having elliptical cross section. The element is curved into a circular arc, one end of the tube is closed and free to move and the other end is connected to gauge point. The changes in pressure cause change in section leading to the movement. The movement is transferred to a needle using sector pinion mechanism. The needle moves over a graduated dial.

Bourdon gage:

Is a device used for measuring gauge pressures the pressure element is a hollow curved metallic tube closed at one end the other end is connected to the pressure to be measured. When the internal pressure is increased the tube tends to straighten pulling on a linkage to which is attached a pointer and causing the pointer to move. When the tube is connected the pointer shows zero. The *bourdon tube*, sketched in figure.


It can be used for the measurement of liquid and gas pressures up to 100s of MPa.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

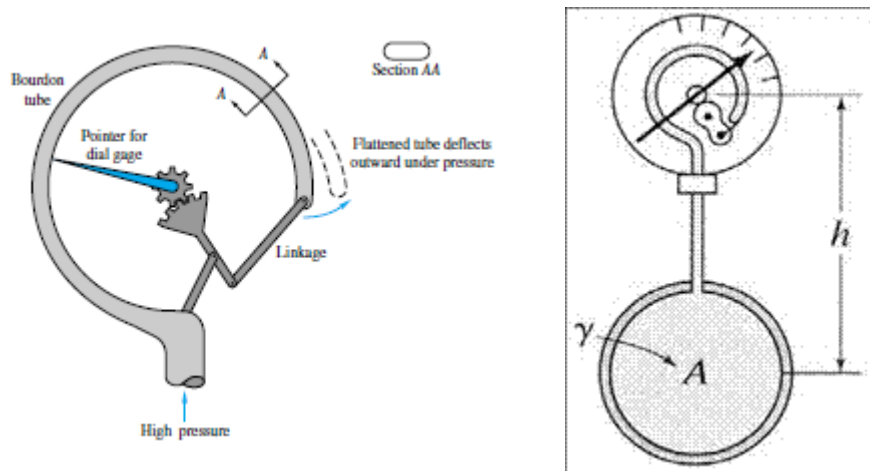

2.7.4 Electronic Pressure Measuring Devices:


Electronic Pressure transducers convert pressure into an electrical output. These devices consist of a sensing element, transduction element and signal conditioning device to convert pressure readings to digital values on display panel.

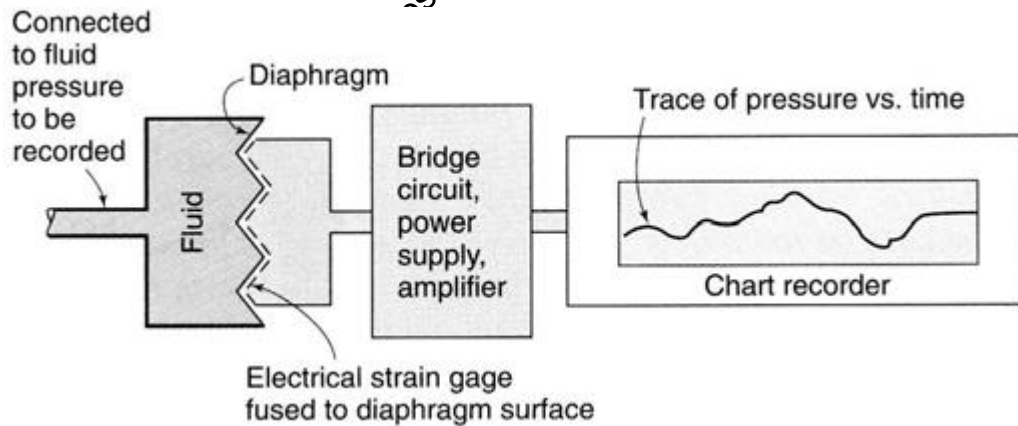

Sensing Elements:

The main types of sensing elements are

- Bourdon tubes,
- Diaphragms,
- Capsules, and
- Bellows.

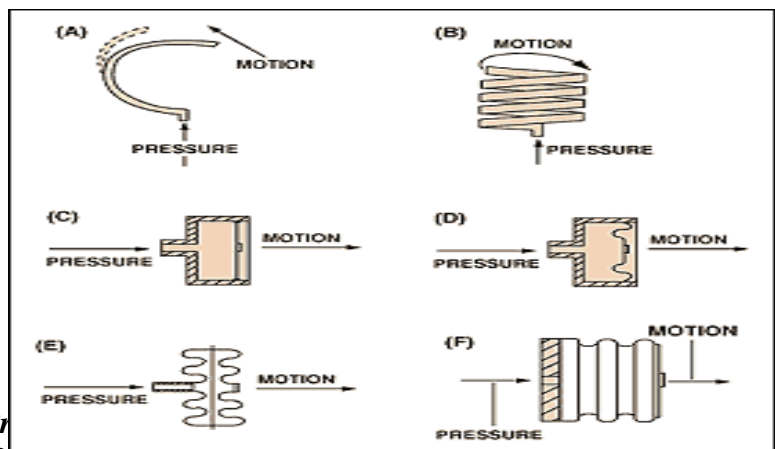

Pressure Transducers:

A transducer is a device that turns a mechanical signal into an electrical signal or an electrical signal into a mechanical response (e.g., Bourdon gage transfers pressure to displacement).

There are a number of ways to accomplish this kind of conversion

- Strain gage
- Capacitance
- Variable reluctance
- Optical

Normally Electronic Pressure transducers are costly compared to conventional mechanical gauges and need to be calibrated at National laboratories before put in to use.

notes4free.in

MODULE-2

- **Module-2A : Hydrostatic forces on Surfaces**
- **Module-2B : Fundamentals of fluid flow (Kinematics)**

by

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka State

Module-2A: Hydrostatic forces on Surfaces

Definition, Total pressure, centre of pressure, total pressure on horizontal, vertical and inclined plane surface, total pressure on curved surfaces, water pressure on gravity dams, Lock gates. Numerical Problems.

2.0 Definitions

Pressure or Pressure intensity (p): It is the Fluid pressure force per unit area of application. Mathematically, $P = \frac{p}{A}$. Units are Pascal or N/m^2 .



Total Pressure (P): This is that force exerted by the fluid on the contact surface (of the submerged surfaces), when the fluid comes in contact with the surface always acting normal to the contact surface. Units are N.

Centre of Pressure: It is defined as the point of application of the total pressure on the contact surface.

The submerged surface may be either plane or curved. In case of plane surface, it may be vertical, horizontal or inclined. Hence, the above four cases may be studied for obtaining the total pressure and centre of pressure.

2.1 Hydrostatic Forces on Plane Horizontal Surfaces:

- If a plane surface immersed in a fluid is horizontal, then
 - Hydrostatic pressure is uniform over the entire surface.
 - The resultant force acts at the centroid of the plane.

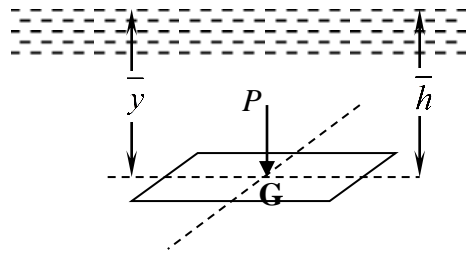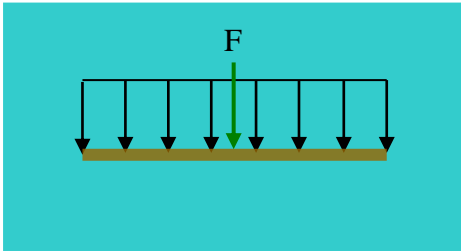

Consider a horizontal surface immersed in a static fluid as shown in Fig. As all the points on the plane are at equal depth from the free surface of the liquid, the pressure intensity will be equal on the entire surface and given by $p = \rho g \bar{y}$, where \bar{y} is the depth of the fluid surface

Let A = Area of the immersed surface

The total pressure force acting on the immersed surface is P

$$P = p \times \text{Area of the surface} = \rho g \bar{y} A$$


$$P = \rho g A \bar{y}$$

Where \bar{y} is the centroidal distance immersed surface from the free surface of the liquid and \bar{h} is the centre of pressure.

2.2 Hydrostatic Forces on Vertical Plane Surface:

Vertical Plane surface submerged in liquid

Consider a vertical plane surface of some arbitrary shape immersed in a liquid of mass density ρ as shown in Figure below:

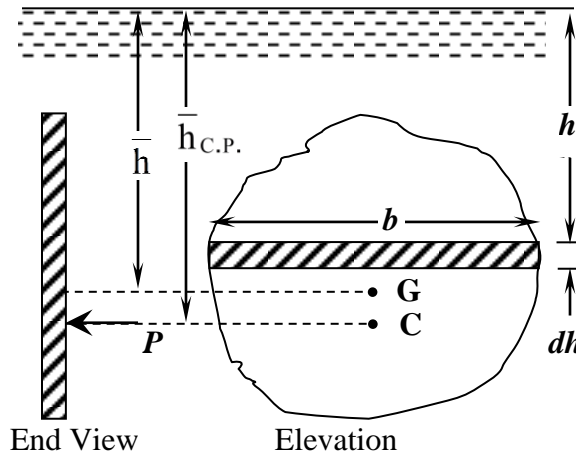

Let, A = Total area of the surface

\bar{h} = Depth of Centroid of the surface from the free surface

G = Centroid of the immersed surface

C = Centre of pressure

$\bar{h}_{C.P.}$ = Depth of centre of pressure

Consider a rectangular strip of breadth b and depth dy at a depth y from the free surface.

Total Pressure:

The pressure intensity at a depth y acting on the strip is $p = \rho gh$

Total pressure force on the strip = $dP = (\rho gh)dA$

\therefore The Total pressure force on the entire area is given by integrating the above expression over the entire area $P = \int dP = \int (\rho gh)dA = \rho g \int h dA$ Eq.(1)

But $\int y dA$ is the Moment of the entire area about the free surface of the liquid given by

$$\int y dA = A\bar{h}$$

Substituting in Eq.(1), we get $P = \rho g A\bar{h} = \gamma A\bar{h}$ Eq.(2)

Where γ is the specific weight of Water

For water, $\rho=1000 \text{ kg/m}^3$ and $g = 9.81 \text{ m/s}^2$. The force will be expressed in Newtons (N)

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

2.3 Hydrostatic Force on a Inclined submerged surface:

The other important utility of the hydrostatic equation is in the determination of force acting upon submerged bodies. Among the innumerable applications of this is the force calculation in storage tanks, ships, dams etc.

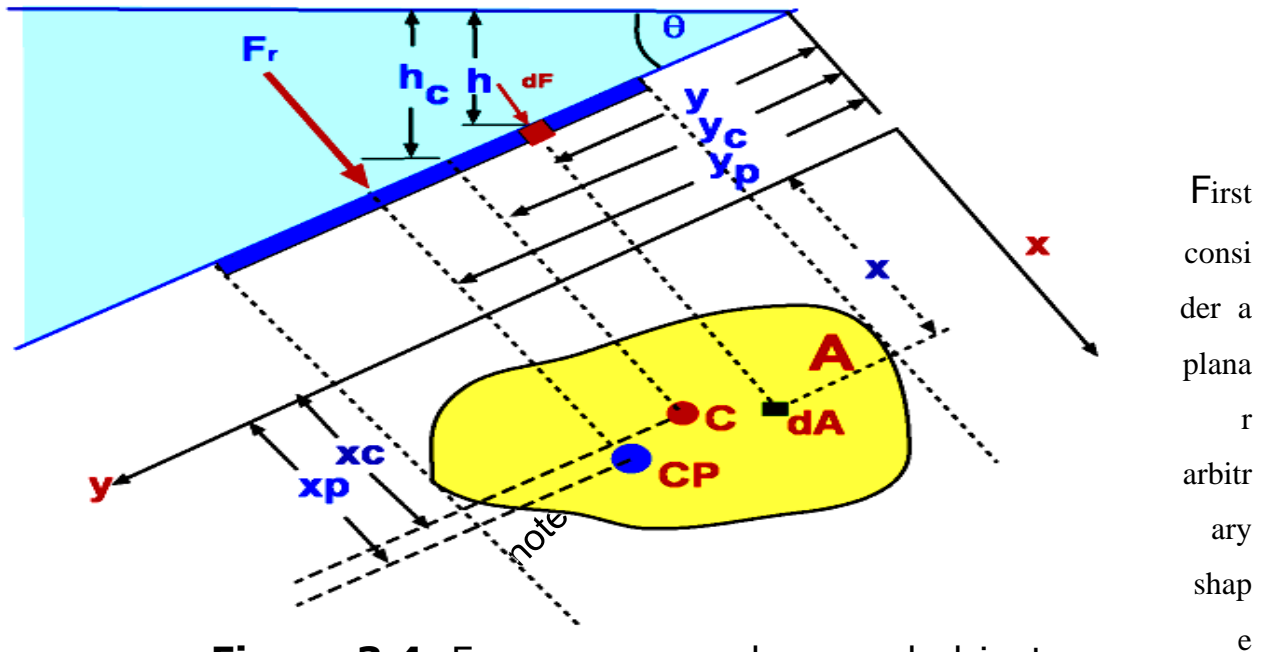


Figure 3.4 :Force upon a submerged object

submerged in a liquid as shown in the figure. The plane makes an angle θ with the liquid surface, which is a free surface. The depth of water over the plane varies linearly. This configuration is efficiently handled by prescribing a coordinate frame such that the y-axis is aligned with the submerged plane. Consider an infinitesimally small area at a (x,y). Let this small area be located at a depth h from the free surface. $dA = dx \cdot dy$

Differential Force acting on the differential area dA of plane,

$$dF = (\text{Pressure}) \cdot (\text{Area}) = (\gamma h) \cdot (dA) \quad (\text{Perpendicular to plane})$$

Then, Magnitude of total resultant force F_R

$$F_R = \int_A \gamma h dA = \int_A \gamma (y \sin \theta) dA \quad \text{Where } h = y \sin \theta$$

$$= \gamma \sin \theta \int_A y dA$$

1st moment of the area

- Related with the center of area

$$\times \int_A y dA = y_c A \quad \text{where } y_c: \text{ y coordinate of the center of area (Centroid)}$$

c.f. Center or 1st moment

$$\int_M x dm = MX_C \quad \& \quad \int_M y dm = MY_C \quad (\text{XC \& YC: Center of Mass})$$

$$\int_A x dA = x_c \quad \& \quad \int_A y dA = y_c \quad (\text{xc \& yc: Center of Area})$$

Moment of inertia or 2nd moment

$$\int_M r^2 dm = I \quad (\text{2nd moment of Mass})$$

$$\int_A y^2 dA = I_x \quad \& \quad \int_A x^2 dA = I_y \quad (\text{2nd moment of Area})$$

Then,

$$F_R = \gamma A y_c \sin \theta = (\gamma h_c) A$$

Where γh_c : Pressure at the centroid = (Pressure at the centroid) \times Area

- Magnitude of a force on an INCLINED plane
- Dependent on γ , Area, and Depth of centroid
- Perpendicular to the surface (Direction)

i) Position of FR on y-axis 'y_R' : y coordinate of the point of action of FR

Moment about x axis:

$$F_R y_R = (\gamma A y_c \sin \theta) y_R = \int_A y dF = \int_A \gamma \sin \theta y^2 dA = \gamma \sin \theta \int_A y^2 dA$$

$$\therefore h_R = \frac{\int_A h^2 dA}{h_c A} = \frac{I_x}{h_c A} \text{ where } I_x = \int_A y^2 dA \text{ : 2nd moment of area}$$

or, by using the parallel-axis theorem, $I_x = I_{xc} + Ay_c^2$


$$\therefore h_{C.P.} = \bar{h} + \frac{I_G \sin^2 \theta^\circ}{Ah}$$

(The centre of pressure below the centroid)

Solved Examples:

Q1. A rectangular tank 10 m x 5 m and 3.25 m deep is divided by a partition parallel to the shorter wall of the tank. One of the compartments contains water to a depth of 3.25 m and the other oil of specific gravity 0.85 to a depth of 2 m. Find the resultant pressure on the partition.

Solution:

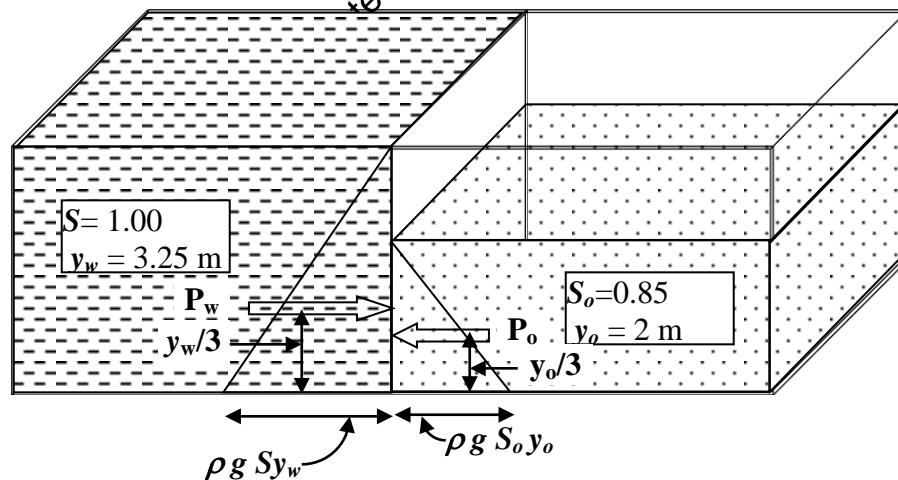

The problem can be solved by considering hydrostatic pressure distribution diagram for both water and oil as shown in Fig.

From hydrostatic law, the pressure intensity p at any depth y_w is given by

$$p = S_o \rho g y_w$$

where ρ is the mass density of the liquid

Pressure force $P = p \times \text{Area}$

$$P_w = 1000 \times 10 \times 3.25 \times 5 \times 3.25 = 528.125 \text{ kN } (\rightarrow)$$

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

Acting at $3.25/3 \text{ m}$ from the base

$$P_o = 0.85 \times 1000 \times 10 \times 2.0 \times 5 \times 2.0 = 200 \text{ kN} (\leftarrow)$$

Acting at $2/3 \text{ m}$ from the base.

$$\text{Net Force } P = P_w - P_o = 528.125 - 200.0 = 328.125 \text{ kN} (\rightarrow)$$

Location:

Let P act at a distance y from the base. Taking moments of P_w, P_o and P about the base, we get

$$P \times y = P_w \times y_w / 3 - P_o \times y_o / 3$$

$$328.125 y = 528.125 \times (3.25/3) - 200 \times (2/3) \text{ or } y = 1.337 \text{ m.}$$

Q2. Determine the total force and location of centre of pressure for a circular plate of 2 m dia immersed vertically in water with its top edge 1.0 m below the water surface

Solution:


$$A = \frac{\pi \times D^2}{4} = \frac{\pi \times 2^2}{4} = 3.142 \text{ m}^2$$

Assume

$$\rho = 1000 \text{ kg/m}^3 \text{ and } g = 10 \text{ m/s}^2$$

We know that the total pressure force

$$P = S_o \rho g A \bar{y} = 1000 \times 10 \times 3.142 \times 2$$

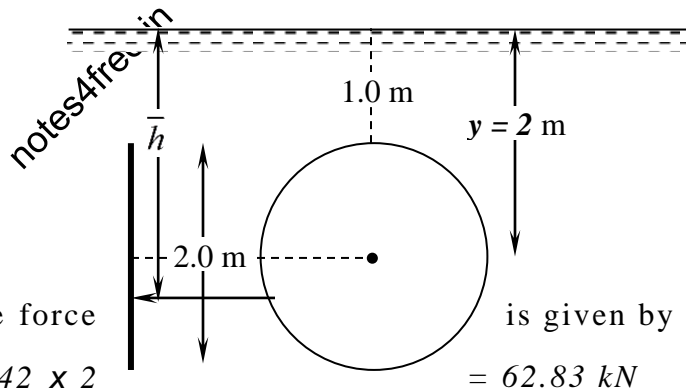

Centre of Pressure

The Centre of pressure is given by

$$\bar{h} = \bar{y} + \frac{I_g}{A \bar{y}}$$

$$I_g = \frac{\pi R^4}{4} = \frac{\pi \times 1^4}{4} = 0.785 \text{ m}^4$$

$$\bar{h} = 2 + \frac{0.785}{3.142 \times 2} = 2.125 \text{ m}$$

Q.3 A large tank of sea water has a door in the side 1 m square. The top of the door is 5 m below the free surface. The door is hinged on the bottom edge. Calculate the force required at the top to keep it closed. The density of the sea water is 1033 kg/m³.

Solution: The total hydrostatic force $F = \gamma_{\text{sea water}} A h_c$

$$\gamma_{\text{sea water}} = 1033 \times 9.81 = 10133.73 \text{ N/m}^3$$

$$\text{Given } A = 1 \text{ m} \times 1 \text{ m} = 1 \text{ m}^2$$

$$h_c = 5 + \frac{1}{2} = 5.5 \text{ m}$$

$$F = 10133.73 \times 1 \times 5.5 = 55735.5 \text{ N}$$

Acting at centre of pressure ($y_{c.p}$):

From the above $h_c = 5.5 \text{ m}$, $A = 1 \text{ m}^2$

$$(I_c)_{xx} = \frac{BD^3}{12} = \frac{1 \times 1^3}{12} = 0.08333 \text{ m}^4$$

$$h_{c.p.} = h_c + \frac{(I_c)_{xx}}{Ah_c} = 5.5 + \frac{0.08333}{1 \times 5.5} = 5.515 \text{ m}$$

Distance of Hydrostatic force (F) from the bottom of the hinge = $5.5 - 5.515 = 0.015 \text{ m}$

The force 'P' required at the top of gate (1m from the hinge)

$$P \times 1 = F \times 0.015 = 55735.5 \times 0.015$$

$$P = 836.03 \text{ N} = 0.836 \text{ kN}$$

Q.4 Calculate the total hydrostatic force and location of centre of pressure for a circular plate of 2.5 m diameter immersed vertically in water with its top edge 1.5 m below the oil surface (Sp. Gr.=0.9)


Solution:

$$A = \frac{\pi \times D^2}{4} = \frac{\pi \times 2^2}{4} = 3.14 \text{ m}^2$$

Assume

$$\rho = 0.9 \times 1000 = 900 \text{ kg/m}^3, g = 9.8 \text{ m/s}^2$$

$$\gamma_{\text{oil}} = 900 \times 9.81 = 8829 \text{ N/m}^3$$

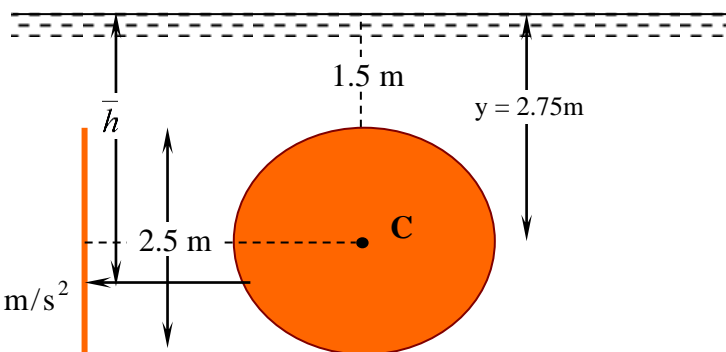

$$h_c = 2.75 \text{ m}$$

We know that the total pressure force is given by 'F'

$$F = \gamma_{oil} A h_c = 8829 \times 4.91 \times 2.75 = 238184 \text{ N} = 238.184 \text{ kN}$$

Centre of Pressure:

The Centre of pressure is given by


$$h_{C.P.} = h_c + \frac{(I_c)_{x-x}}{A h_c}$$

$$I_g = \frac{\pi R^4}{4} = \frac{\pi \times 1.25^4}{4} = 1.9175 \text{ m}^4$$

$$h_{C.P.} = 2.75 + \frac{1.9175}{4.91 \times 2.75} = 2.892 \text{ m}$$

Q.5 A square tank with 2 m sides and 1.5 m high contains water to a depth of 1 m and a liquid of specific gravity 0.8 the water to a depth of 0.5 m. Find the magnitude and location of hydrostatic pressure on one face of tank.

notes4free.in

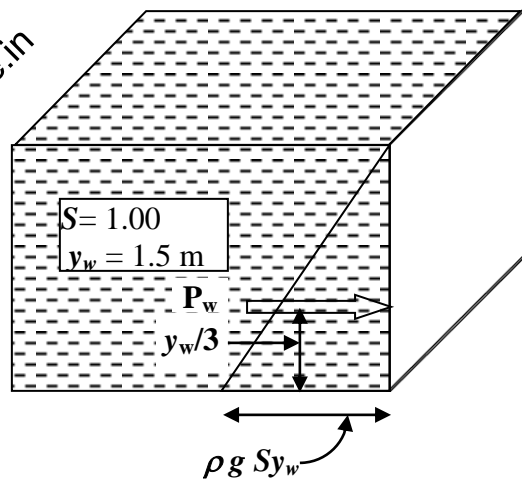

Solution:

The problem can be solved by considering hydrostatic pressure distribution diagram for water as shown in Fig. From hydrostatic law, the pressure intensity p at any depth y_w is given by $p = S_o \rho g y_w$ where ρ is the mass density of the liquid

Pressure force $P = p \times \text{Area}$

$$P_w = 1000 \times 10 \times 2.0 \times 1.5 \times 1.5 = 45 \text{ kN} (\rightarrow)$$

acting at $1.5/3 = 0.5 \text{ m}$ from the base

Q.6 A trapezoidal channel 2m wide at the bottom and 1m deep has side slopes 1:1. Determine: i) Total pressure ii) Centre of pressure, when it is full of water

Ans: Given $B = 2\text{m}$ Area of flow $A = (B+sy)y = 3\text{m}^2$

The combined centroid will be located based on two triangular areas and one rectangle (shown as G_1, G_2, G_2)


$$\bar{y} = \frac{A_1 \times h_1 + A_2 \times h_2 + A_3 \times h_3}{A_1 + A_2 + A_3}$$

The total area $A = 3\text{m}^2$

Area of rectangle = $2 \times 1 = 2\text{m}^2$

Area of Triangle = $\frac{1}{2} \times 1 \times 1 = 0.5\text{m}^2$

$$\bar{y} = \frac{(2 \times 1) \times 0.5 + \left[\frac{1}{2} \times (1 \times 1) \right] \times 0.333 + \left[\frac{1}{2} \times (1 \times 1) \right] \times 0.333}{3}$$

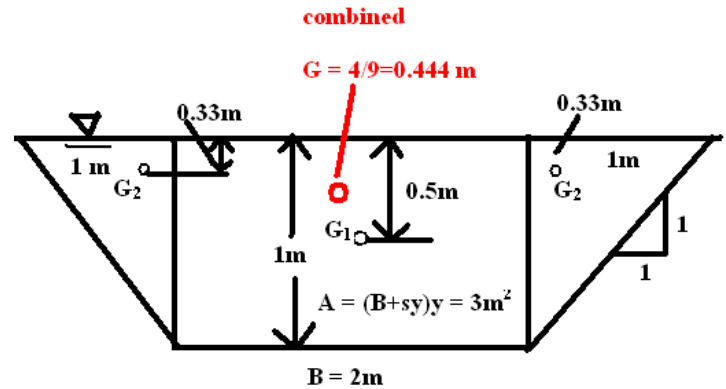

i) The total pressure $P = \gamma_w \times A \times \bar{y} = 9810 \times 3 \times 0.444 = 13080\text{N}$

ii) Centre of pressure

The centroidal moment of Inertia of Rectangle and Triangle is

$$I_{G1} = \frac{2 \times 1^3}{12} = 0.1667\text{m}^4 \quad \text{at } 0.5\text{m from water - surface}$$

$$I_{G2} = \frac{1 \times 1^3}{36} = 0.028\text{m}^4 \quad \text{at } 0.333\text{m from water - surface}$$

$$\bar{h} = \bar{y} + \frac{I_g}{A y} \dots \text{Eq.1}$$

The moment of Inertia about combined centroid can be obtained by using parallel axis theorem

$$I_G = ((I_{G1}) + A_1 d_1^2) + ((I_{G2}) + A_2 d_2^2) + ((I_{G2}) + A_2 d_2^2) \quad (\text{as both the triangles are similar})$$

$$I_G = (0.1667 + 0.00618) + 2((I_{G2}) + A_2 d_2^2)$$

$$I_G = (0.1667 + 0.00618) + 2(0.028 + 0.0062) = 0.2408\text{m}^4$$

Substituting in Eq.1, The centre of pressure from free surface of water

$$\bar{h} = \bar{y} + \frac{I_g}{A y} \dots \text{Eq.1}$$

$$\bar{h} = 0.444 + \frac{0.2408}{3 \times 0.444} = 0.6252\text{m}$$

Q.7. A rectangular plate 1.5m x 3.0m is submerged in water and makes an angle of 60° with the horizontal, the 1.5m sides being horizontal. Calculate the magnitude of the force on the plate and the location of the point of application of the force, with reference to the top edge of the plate, when the top edge of the plate is 1.2m below the water surface.

Solution:

$$\bar{h} = \frac{1.2}{\sin 60^\circ} + 1.5 = 1.386 + 1.5 = 2.886\text{m}$$

$$A = 3\text{m} \times 1.5\text{m} = 4.5\text{m}^2$$

$$\bar{h} = y \sin 60^\circ = 2.886 \sin 60^\circ = 2.499\text{m}$$

$$F = \rho g h A = 1000 \times 9.81 \times 2.499 \times 3 \times 1.5$$

$$\therefore F = 109.92 \times 10^3 \text{ N} = 109.92 \text{ kN}$$

$$h_{C.P.} = \bar{h} + \frac{I_G \sin^2 60^\circ}{A \bar{h}}$$

$$\therefore h_{C.P.} = 2.886 + \frac{3^2}{12 \times 2.886} = 2.886 + 0.260 = 3.146\text{m}$$

From the top edge of the plate, $a = 3.146 - 1.386 = 1.760\text{m}$

Q.8 A vertical bulkhead 4m wide divides a storage tank. On one side of the bulkhead petrol (S.G. = 0.78) is stored to a depth of 2.1m and on the other side water is stored to a depth of 1.2m. Determine the resultant force on the bulkhead and the position where it acts.

Solution:



$$F = \rho g h A = \rho g \frac{h}{2} \cdot bh = \frac{1}{2} \rho g h^2 \cdot b$$

$$F_1 = \frac{1}{2} \times 780 \times 9.81 \times 2.1^2 \times 4 \text{ N} = 67.5 \text{ kN}$$

$$F_2 = \frac{1}{2} \times 1000 \times 9.81 \times 1.2^2 \times 4 \text{ N} = 28.25 \text{ kN}$$

Hence the resultant force

$$F_R = F_1 - F_2 = 67.5 - 28.25 = 39.25 \text{ kN}$$

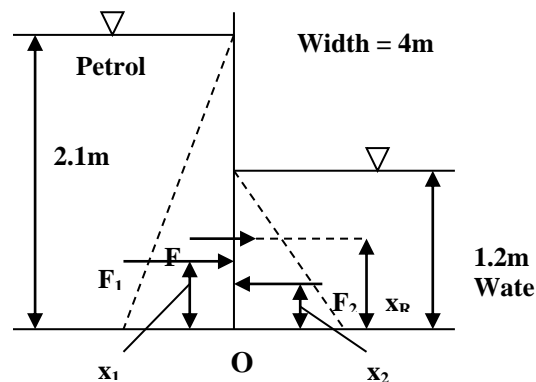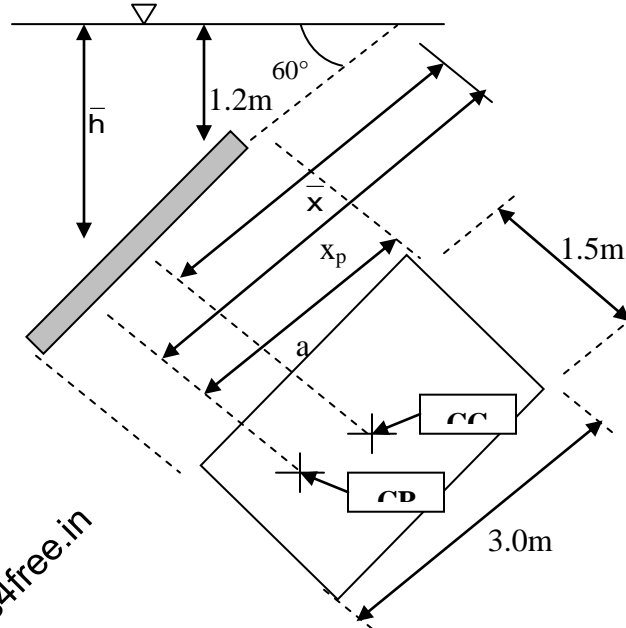

$$h_{C.P.} = \bar{h} + \frac{I_G}{Ah} = \frac{h}{2} + \frac{bh^3}{12} \frac{1}{bh(h/2)} = \frac{h}{2} + \frac{h}{6} = \frac{2}{3}h$$

From the diagram, $y = h - \frac{2}{3}h = \frac{1}{3}h$

Hence, $y_1 = 2.1 / 3 = 0.7\text{m}$ and $y_2 = 1.2 / 3 = 0.4\text{m}$

Taking moments about 'O', $F_R \cdot y_R = F_1 \cdot y_1 - F_2 \cdot y_2$

i.e. $39.25 \times y_R = 67.5 \times 0.7 - 28.25 \times 0.4$ and hence $y_R = 0.916\text{m}$

Q.9 A hinged, circular gate 750mm in diameter is used to close the opening in a sloping side of a tank, as shown in the diagram in **Error! Reference source not found.**. The gate is kept closed against water pressure partly by its own weight and partly by a weight on the lever arm. Find the mass M required to allow the gate to begin to open when the water level is 500mm above the top of the gate. The mass of the gate is 60 kg. (Neglect the weight of the lever arm.)

Solution:

$$a = \frac{500}{\sin 45^\circ} = 707\text{mm}$$

$$\bar{x} = a + 375 = 1082\text{mm}$$

$$\bar{h} = \bar{x} \sin 45^\circ = 765\text{mm}$$

$$F = \rho g \bar{h} A = 1000 \times 9.81 \times 0.765 \times (\pi \times 0.75^2 / 4)$$

$$\therefore F = 3.315 \times 10^3 \text{ N} = 3.315 \text{ kN}$$

$$x_p = \bar{x} + \frac{I_G}{Ax} = \bar{x} + \frac{\pi d^4}{64} \cdot \frac{4}{\pi d^2 \bar{x}} = \bar{x} + \frac{d^2}{16 \cdot \bar{x}}$$

$$x_p = 1.082 + \frac{0.75^2}{16 \times 1.082} = 1.082 + 0.032 = 1.114\text{m}$$

Taking moments about the hinge



$$F(x_p - a) = Mg \times 0.8 + mg \times 0.375 \cos 45^\circ$$

$$3315(1.114 - 0.707) = 9.81(M \times 0.8 + 60 \times 0.375 \cos 45^\circ)$$


$$M \times 0.8 = \frac{3315(1.114 - 0.707)}{9.81} - 60 \times 0.375 \cos 45^\circ$$

$$M \times 0.8 = 137.5 - 16 = 121.5$$

$$\therefore M = \frac{121.5}{0.8} = 152 \text{ kg}$$

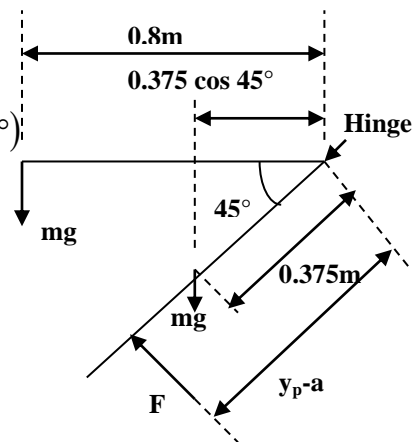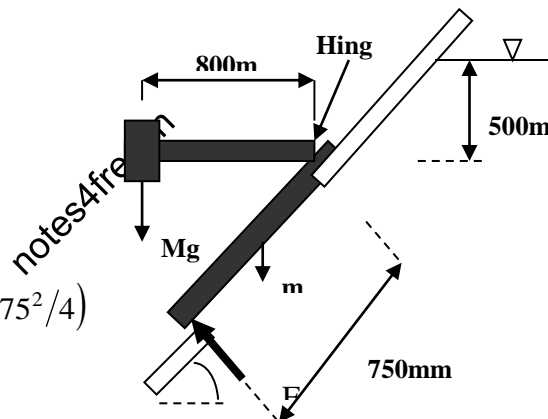

Q.10. A rectangular plate 1 m x 3 m is immersed in water such that its upper and lower edge is at depths 1.5 m and 3 m respectively. Determine the total pressure acting on the plate and locate it.

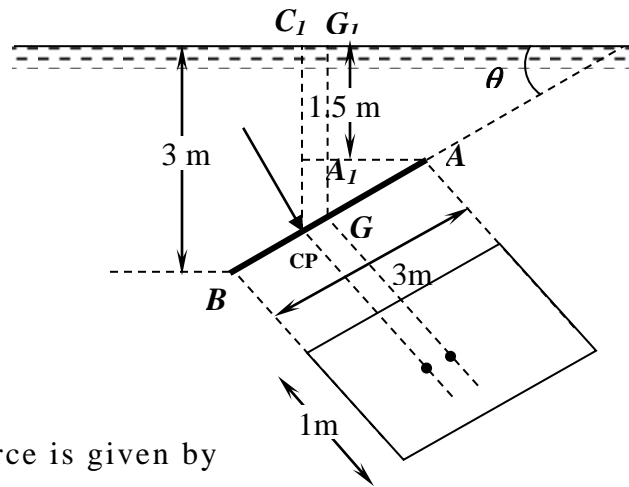

Solution:

$$A = 1 \times 3 = 3 \text{ m}^2$$

$$\gamma_w = 9810 \text{ N/m}^3$$

$$h_c = \frac{3\text{m} + 1.5\text{m}}{2} = 2.25\text{m}$$

We know that the total pressure force is given by

$$F = \gamma_{water} A h_c = 9810 \times 3.0 \times 2.25 = 66217.5 \text{ N}$$

$$\sin \theta = 1.5 / 3 = 0.5$$

$$\theta = 30^\circ$$

Centre of Pressure; The Centre of pressure is given by

$$(I_c)_{x-x} = \frac{bd^3}{12} = \frac{1 \times 3^3}{12} = 2.25 \text{ m}^4$$

$$h_c = 2.25 \text{ m}$$

$$CC_1 = h_{C.P.} = h_c + \frac{(I_c)_{x-x} \sin^2 \theta}{A h_c}$$

$$CC_1 = h_{C.P.} = 2.25 + \frac{2.25 \sin^2 30^\circ}{3 \times 2.25}$$

$$CC_1 = h_{C.P.} = 2.33333 \text{ m}$$

Q 11. A circular plate 2.5m diameter is immersed in water, its greatest and least depth below the free surface being 3m and 1m respectively. Find

(i) The total pressure on one face of the plate and (ii) Position of centre of pressure

Ans: Given d = 2.5m,

$$\theta = \sin^{-1}\left(\frac{2}{2.5}\right)$$

$$\theta = 53.13^\circ$$

$$\bar{h} = 1 + 1 = 2\text{m}$$


$$A = \frac{\pi}{4} d^2 = \frac{\pi}{4} \times 2.5^2 = 4.909\text{m}^2$$

$$I_G = \frac{\pi}{64} d^4 = \frac{\pi}{64} \times (2.5)^4 = 1.917\text{m}^4$$

$$F = \gamma_w A \bar{h} = 9.81 \times 4.909 \times 2 = 96.31 \text{ kN}$$

$$h_{c.p.} = \bar{h} + \frac{I_G \times \sin^2 \theta}{A \times \bar{h}} = 2 + \frac{1.917 \times \sin^2 53.13^\circ}{4.909 \times 2}$$

$$h_{c.p.} = 2.125\text{m}$$

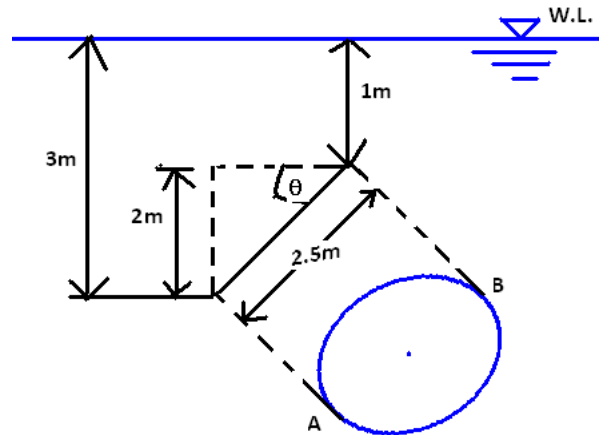

Q.12. A 2m wide and 3m deep rectangular plane surface lies in water in such a way the top and bottom edges are at a distance of 1.5m and 3m respectively from the surface. Determine the hydrostatic force and centre of pressure

Ans: Given A = 3m × 2m = 6m²,

$$I_G = \frac{2 \times 3^3}{12} = 4.5\text{m}^4$$

Hydrostatic force


$$P = \gamma_w \times A \times \bar{h}$$

$$P = 9.81 \times 6 \times \left(\frac{3+1.5}{2}\right)$$

P = 132.435 kN

$$\sin \theta = \frac{(3.0 - 1.5)}{3} = 0.5$$

$$\theta = 30^\circ$$

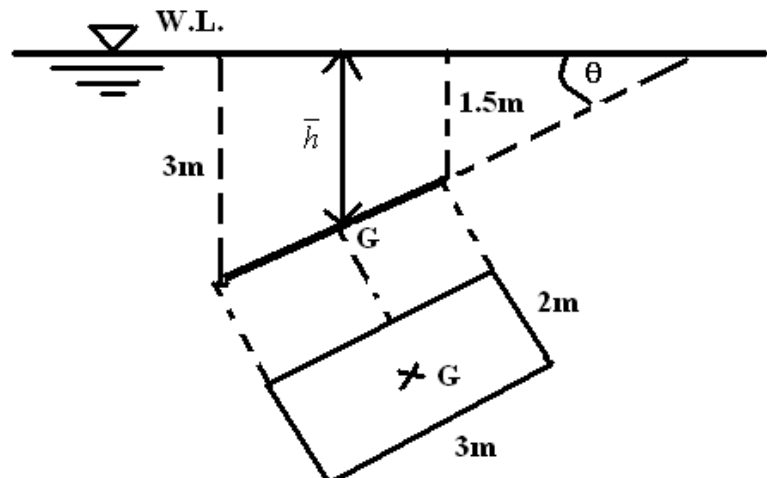

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

$$I_g = \frac{bd^3}{12} = \frac{2 \times 3^3}{12} = 4.5 m^4$$

$$\bar{h} = 2.25 + \frac{4.5}{6 \times 2.25} \sin^2 30 = 2.33 m$$

Q.14. A Circular plate with a concentric hole is immersed in water in such a way that its greatest and least depth below water surface are 4 m and 1.5 m respectively. Determine the total pressure on the plate and locate it if the diameter of the plate and hole are 3 m and 1.5 m respectively.

Solution:

Assume

$$\rho = 1000 \text{ kg/m}^3 \text{ and } g = 10 \text{ m/s}^2$$

$$A = \frac{\pi}{4}(D^2 - d^2) = \frac{\pi}{4}(3^2 - 1.5^2) = 5.3014 \text{ m}^2$$

$$\bar{y} = GG_1$$

$$\bar{h} = CC_1$$

$$\sin \theta = 2.5 / 3 = 0.833 \text{ and } \theta = 30^\circ$$

$$GG_1 = G_1A_1 + A_1G = G_1A_1 + AG \sin \theta$$

$$GG_1 = 1.5 + (3/2) 0.833 = 2.75 \text{ m}$$

We know that the total pressure force is given by

$$P = S_o \rho g A \bar{y} = 1000 \times 10 \times 5.3014 \times 2.75 = 144.7885 \text{ kN}$$


Centre of Pressure

The Centre of pressure is given by

$$\bar{h} = \bar{y} + \frac{I_g}{A \bar{y}} \sin^2 \theta$$

$$I_g = \frac{\pi}{4}(R^4 - r^4) = \frac{\pi}{4}(1.5^4 - 0.75^4) = 3.728 \text{ m}^4$$

$$\bar{h} = 2.75 + \frac{3.728}{5.3014 \times 2.75} \sin^2 30 = 2.814 \text{ m}$$

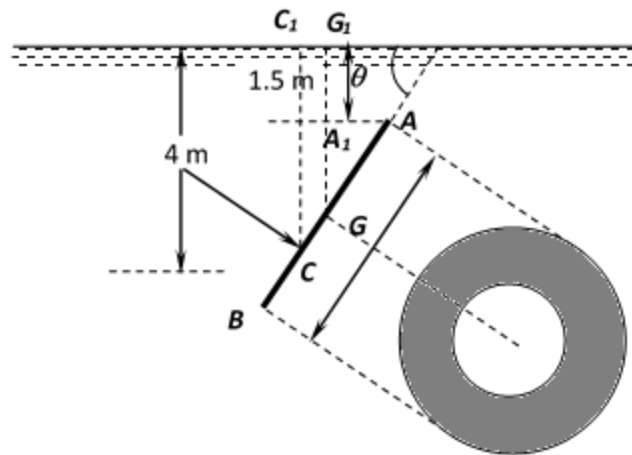

notes

Q.15. A circular plate of dia 1.5 m is immersed in a liquid of relative density of 0.8 with its plane making an angle of 30° with the horizontal. The centre of the plate is at a depth of 1.5 m below the free surface. Calculate the total force on one side of the plate and location of centre of pressure.

Solution:

Assume

$$\rho = 1000 \text{ kg/m}^3 \text{ and } g = 10 \text{ m/s}^2$$

$$S_o = 0.80$$

$$A = \frac{\pi D^2}{4} = \frac{\pi \times 1.5^2}{4} = 1.767 \text{ m}^2$$

$$\bar{y} = GG_1$$

$$\bar{h} = CC_1$$

$$\theta = 30^\circ$$

$$GG_1 = G_1A_1 + A_1G = G_1A_1 + AG \sin \theta$$

$$GG_1 = 1.5 + (3/2) 0.833 = 2.75 \text{ m}$$

We know that the total pressure force is given by

$$P = S_o \rho g A \bar{y} = 0.8 \times 1000 \times 10 \times 1.767 \times 2.75 = 38.874 \text{ kN}$$


Centre of Pressure

The Centre of pressure is given by

$$\bar{h} = \bar{y} + \frac{I_g}{A \bar{y}} \sin^2 \theta$$


$$I_g = \frac{\pi R^4}{4} = \frac{\pi \times 0.75^4}{4} = 0.2485 \text{ m}^4$$

$$\bar{h} = 2.75 + \frac{0.2485}{1.767 \times 2.75} \sin^2 30 = 2.763 \text{ m}$$

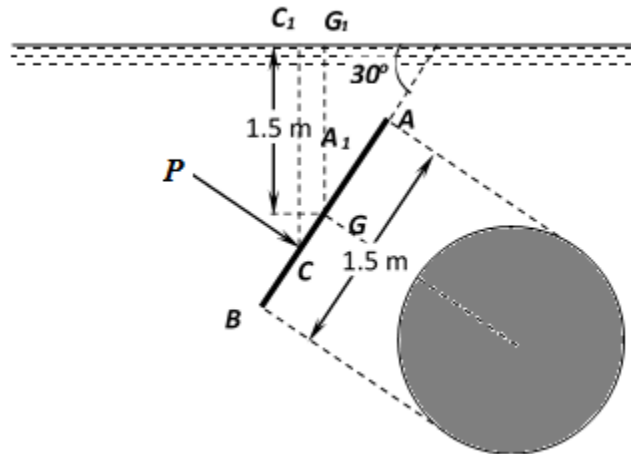

Q.16 A vertical gate closes a circular tunnel of 5 m diameter running full of water, the pressure at the bottom of the gate is 0.5 MPa. Determine the hydrostatic force and the position of centre of pressure.

Solution: Assume $\rho = 1000 \text{ kg/m}^3$ and $g = 10 \text{ m/s}^2$

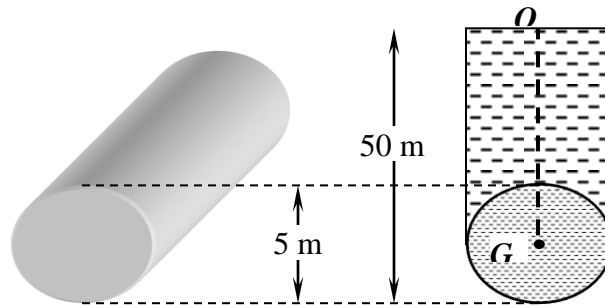

Pressure intensity at the bottom of the gate is $= p = S_o \rho g y$

Where y is the depth of point from the free surface.

$$0.5 \times 10^6 = 1000 \times 10 \times y$$

$$y = 50 \text{ m}$$

Hence the free surface of water is at 50 m from the bottom of the gate

$$A = \frac{\pi D^2}{4} = \frac{\pi \times 5^2}{4} = 19.635 \text{ m}^2$$

$$\bar{y} = OG = 50 - 2.5 = 47.5 \text{ m}$$

We know that the total pressure force is given by

$$P = S_o \rho g A \bar{y} = 1000 \times 10 \times 19.635 \times 47.5 = 9326.625 \text{ kN}$$

Centre of Pressure

The Centre of pressure is given by

$$\bar{h} = \bar{y} + \frac{I_g}{A \bar{y}}$$








$$I_g = \frac{\pi R^4}{4} = \frac{\pi \times 2.5^4}{4} = 30.68 \text{ m}^4$$

$$\bar{h} = 47.5 + \frac{30.68}{19.635 \times 47.5} = 47.533 \text{ m}$$

i.e. $50.0 - 47.533 = 2.677 \text{ m}$ from the bottom of the gate or tunnel.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

PROPERTIES OF PLANE SECTIONS

Geometry	Centroid	Moment of Inertia I_{xx}	Product of Inertia I_{xy}	Area
	$b/2, L/2$	$\frac{bL^3}{12}$	0	$b \cdot L$
	0, 0	$\frac{\pi R^4}{4}$	0	πR^2
	$b/3, L/3$	$\frac{bL^3}{36}$	$-\frac{b^2L^2}{72}$	$\frac{b \cdot L}{2}$
	$0, a = \frac{4R}{3\pi}$	$R^4 \left(\frac{\pi}{8} - \frac{8}{9\pi} \right)$	0	$\frac{\pi R^2}{2}$
	$a = \frac{L}{3}$	$\frac{bL^3}{36}$	$\frac{b(b-2s)L^2}{72}$	$\frac{1}{2} b \cdot L$
	$a = \frac{4R}{3\pi}$	$\left(\frac{\pi}{16} - \frac{4}{9\pi} \right) R^4$	$\left(\frac{1}{8} - \frac{4}{9\pi} \right) R^4$	$\frac{\pi R^2}{4}$
	$a = \frac{h(b+2b_1)}{3(b+b_1)}$	$\frac{h^3(b^2+4bb_1+b_1^2)}{36(b+b_1)}$	0	$(b+b_1) \frac{h}{2}$

Fluid Specific Weight

	1bf/ft ³	N/m ³		1bf/ft ³	N/m ³
Air	.0752	11.8	Seawater	64.0	10,050
Oil	57.3	8,996	Glycerin	78.7	12,360
Water	62.4	9,790	Mercury	846.	133,100
Ethyl	49.2	7,733	Carbon	99.1	15,570


2.4 Hydrostatic Forces on Curved Surfaces

Since this class of surface is curved, the direction of the force is different at each location on the surface. Therefore, we will evaluate the x and y components of net hydrostatic force separately.

Consider curved surface, a-b. Force balances in x & y directions yield

$$F_h = F_H$$

$$F_v = W_{\text{air}} + W_1 + W_2$$

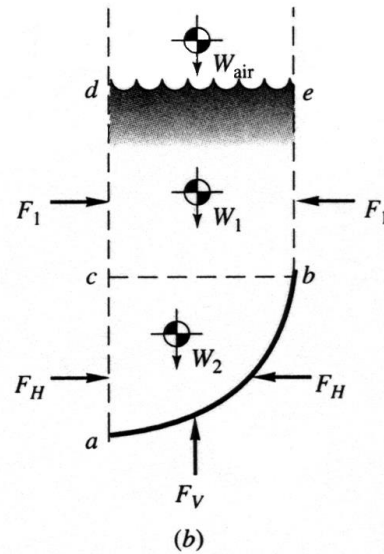

From this force balance, the basic rules for determining the horizontal and vertical component of forces on a curved surface in a static fluid can be summarized as follows:


Horizontal Component, F_h

The horizontal component of force on a curved surface equals the force on the plane area formed by the projection of the curved surface onto a vertical plane normal to the component.

The horizontal force will act through the c.p. (not the centroid) of the projected area.

from the Diagram:

All elements of the analysis are performed with the vertical plane. The original curved surface is important only as it is used to define the projected vertical plane.

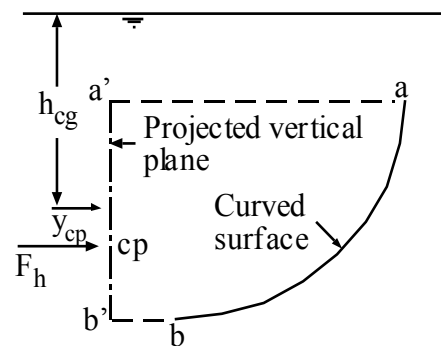

Therefore, to determine the horizontal component of force on a curved surface in a hydrostatic fluid:

Vertical Component - F_v


The vertical component of force on a curved surface equals the weight of the effective column of fluid necessary to cause **the pressure on the surface**.

The use of the words **effective column of fluid** is important in that there may not always actually be fluid directly above the surface. (See graphics below)


This effective column of fluid is specified by identifying the column of fluid that would be required to cause the pressure at each location on the surface.

Thus, to identify the Effective Volume - V_{eff} :

$$F_v = V_{\text{eff}}$$

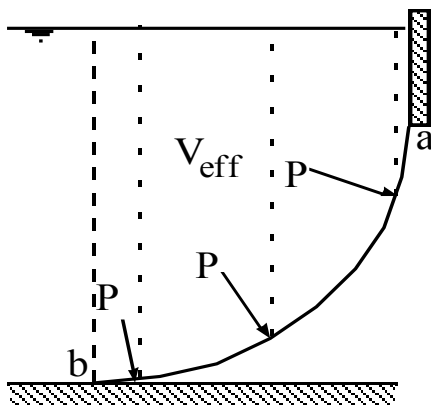

Fluid above the surface

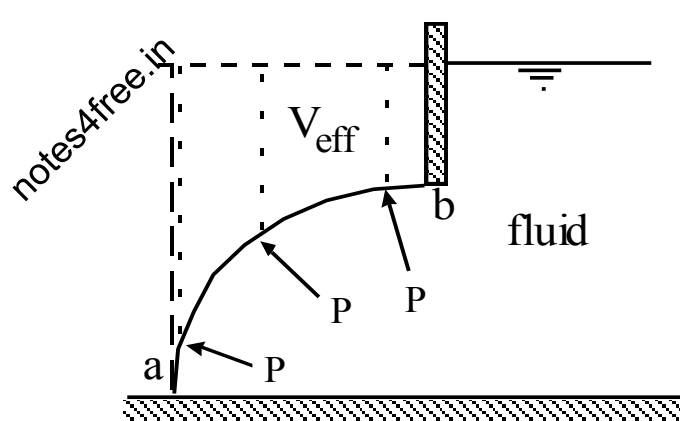

No fluid actually above surface

$$R = \sqrt{(\sum F_x^2) + (\sum F_y^2)} \quad \theta = \tan^{-1} \left(\frac{\sum F_y}{\sum F_x} \right)$$

Q.17 Find the horizontal and vertical component of force and its point of application due to water per meter length of the gate AB having a quadrant shape of radius 2.5 m shown in Fig. Find also the resultant force in magnitude and direction.

Solution:

Assume

$$\rho = 1000 \text{ kg/m}^3 \text{ and } g = 9.81 \text{ m/s}^2$$

$$R = 2.5 \text{ m, Width of gate} = 1 \text{ m}$$

Horizontal force F_x

F_h = Force on the projected area of the curved surface on the vertical plane

$$= \text{Force on } BC$$

$$A = 2.5 \times 1 = 2.5 \text{ m}^2$$

$$\bar{y} = \frac{2.5}{2} = 1.25 \text{ m}$$

$$F = \gamma_{\text{water}} A h_c = 9810 \times 2.5 \times 1.25 = 30656 \text{ N} = 30.656 \text{ kN}$$

This will act at a distance $\bar{h} = \frac{2}{3} \times 2.5 = \frac{5}{3} \text{ m}$ from the free surface of liquid AC

Vertical Force F_y

F_y = Weight of water (imaginary) supported by AB

$$= \gamma_{\text{water}} \times \text{Area of } ACB \times \text{Length of gate}$$

$$= 9810 \times \frac{\pi \times 2.5^2}{4} \times 1 = 48154 \text{ N} = 48.154 \text{ kN}$$



This will act at a distance $\bar{x} = \frac{4 \times 2.5}{3\pi} = 1.061 \text{ m}$ from CB

The Resultant force

$$F = \sqrt{F_x^2 + F_y^2} = \sqrt{30.656^2 + 48.154^2} = 57.084 \text{ kN} \text{ and its}$$

inclination is given by

$$\alpha = \tan^{-1} \frac{F_y}{F_x} = \tan^{-1} \frac{48.154}{30.656} = 57.51^\circ$$

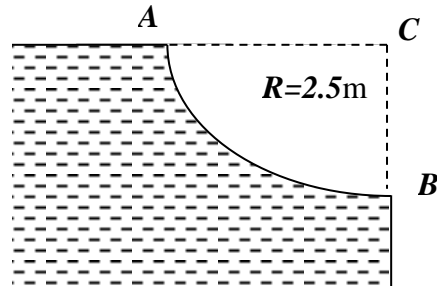

Q.18 Find the horizontal and vertical component of force and its point of application due to water per meter length of the gate AB having a quadrant shape of radius 2m shown in Fig. Find also the resultant force in magnitude and direction.

Solution:

Assume

$$\rho = 1000 \text{ kg/m}^3 \text{ and } g = 10 \text{ m/s}^2$$

$$R = 2 \text{ m, Width of gate} = 1 \text{ m}$$

Horizontal force F_x

F_x = Force on the projected area of the curved surface on the vertical plane

$$= \text{Force on } BO = P = S_o \rho g A \bar{y}$$

$$A = 2 \times 1 = 2 \text{ m}^2$$

$$\bar{y} = \frac{2}{2} = 1 \text{ m}$$

$$F_x = 1000 \times 10 \times 2 \times 1 = 20 \text{ kN}$$

This will act at a distance $\bar{h} = \frac{2}{3} \times 2 = \frac{4}{3} \text{ m}$ from the free surface of liquid

Vertical Force F_y

F_y = Weight of water (imaginary) supported by AB

$$= S_o \rho g \times \text{Area of } AOB \times \text{Length of gate}$$



$$= 1000 \times 10 \times \frac{\pi \times 2^2}{4} \times 1 = 31.416 \text{ kN}$$

This will act at a distance $\bar{x} = \frac{4 \times 2}{3\pi} = 0.848 \text{ m}$ from OB

$$\text{Resultant force } F = \sqrt{F_x^2 + F_y^2} = \sqrt{20^2 + 31.426^2} = 37.25$$

kN and its inclination is given by

$$\alpha = \tan^{-1} \left[\frac{F_y}{F_x} \right] = \tan^{-1} \left[\frac{31.426}{20} \right] = 57.527^\circ$$

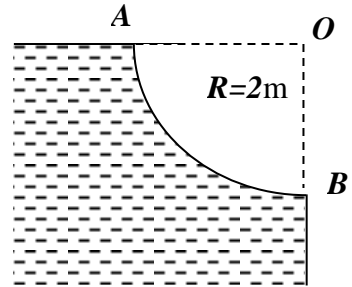

Q.19. A cylinder holds water in a channel as shown in Fig. Determine the weight of 1 m length of the cylinder.


Solution:

Radius of Cylinder = $R = 2\text{ m}$

Length of cylinder = 1 m

Weight of Cylinder = W

Horizontal force exerted by water = F_x

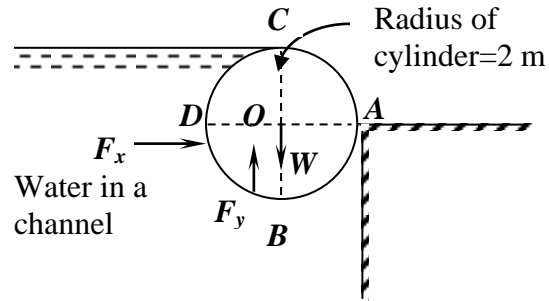

$F_x =$ Force on vertical area BOC

$$= S_o \rho g A \bar{y} = 1000 \times 10 \times (4 \times 1) \times (2/2) = 40 \text{ kN } (\rightarrow)$$

The vertical force exerted by water = $F_y =$ Weight of water enclosed in $BDCOB$

$$F_y = S_o \rho g \left(\frac{\pi \times 2^2}{4} \right) \times L = 1000 \times 10 \times 3.142 = 31.416 \text{ kN } (\uparrow)$$

For equilibrium of the cylinder the weight of the cylinder must be equal to the force exerted by the water on the cylinder. Hence, the weight of the cylinder is **31.416 kN** per meter length.

Q.20. Fig. shows the cross section of a tank full of water under pressure. The length of the tank is 2 m. An empty cylinder lies along the length of the tank on one of its corner as shown. Find the resultant force acting on the curved surface of the cylinder.

Solution:


$$R = 1 \text{ m}$$

$$L = 2 \text{ m}$$

$$p = \rho g h = 1000 \times 10 \times h = 20 \times 10^3$$

$$h = 2 \text{ m}$$

For this pressure, the free surface should be 2 m above A



Horizontal component of force F_x

$$F_x = S_o \rho g A \bar{y}$$

$$A = 1.5 \times 2.0 = 3 \text{ m}^2$$

$$\bar{y} = 2 + \frac{1.5}{2} = 2.75 \text{ m}$$

$$F_x = 1000 \times 10 \times 3.0 \times 2.75 = 82.5 \text{ kN } (\rightarrow)$$

The vertical force exerted by water = F_y

$$F_y = \text{Weight of water enclosed in } ABC$$

$$= \text{Weight of water enclosed in } CODEABC$$

$$= \text{Weight of water enclosed in } (CODFBC - AEFB)$$

But Weight of water enclosed in $CODFBC$

$$= \text{Weight of water enclosed in } (COB + ODFBO)$$

$$= \rho g \left[\frac{\pi R^2}{4} + BO \times OD \right] \times 2 = 1000 \times 10 \left[\frac{\pi \times 1^2}{4} + 1 \times 2.5 \right] \times 2 = 65.708 \text{ kN}$$

Weight of water in $AEFB = S_o \rho g [\text{Area of } AEFB] \times 2.0$

$$= S_o \rho g [\text{Area of } (AEFG + AGBH - AHB)] \times 2.0$$

$$\sin \theta = AH/AO = 0.5/1.0 = 0.5. \therefore \theta = 30^\circ$$

$$BH = BO - HO = 1.0 - AO \cos \theta = 1.0 - 1 \times \cos 30^\circ = 0.134$$

Area $ABH = \text{Area } ABO - \text{Area } AHO$

$$= \pi R^2 \times \frac{30}{360} - \frac{AH \times HO}{2.0} = \pi \times 1^2 \times \frac{1}{12} - \frac{0.5 \times 0.866}{2.0} = 0.0453$$

$$\therefore \text{Weight of water in } AEFB = 1000 \times 10 [AE \times AG + AG \times AH - 0.0453] \times 0.2$$

$$= 1000 \times 10 [2.0 \times 0.134 + 0.134 \times 0.5 - 0.0453] \times 0.2$$

$$= 5794 \text{ N}$$

$$F_y = 65708 - 5794 = 59914 \text{ N (Ans)}$$

Q.21. Calculate the resultant water pressure on the Tainter gate of radius 8 m and width unity as shown in Fig.

Solution:

Horizontal component of force F_x

$$F_x = S_o \rho g A \bar{y}$$

$$DB = OB \sin 30 = 8 \times 0.5 = 4.0 \text{ m}$$

$$A = 4 \times 1.0 = 4 \text{ m}^2$$

$$\bar{y} = \frac{4}{2} = 2 \text{ m}$$

The Horizontal force exerted by water = F_x

$$F_x = 1000 \times 10 \times 4.0 \times 2.0 = 80.0 \text{ kN } (\rightarrow)$$

The vertical force exerted by water = F_y

$$F_y = \text{Weight of water enclosed in } CDBC$$



$$= \text{Weight of water enclosed in } (CDOBC - DOB)$$

$$= S_o \rho g \left[\pi R^2 \times \frac{30}{360} - \frac{BD \times DO}{2.0} \right] = 1000 \times 10 \left[\pi \times 8^2 \times \frac{1}{12} - \frac{4.0 \times 8.8 \cos 30}{2.0} \right] = 15.13 \text{ kN}$$

$$\text{Resultant force } F = \sqrt{F_x^2 + F_y^2} = \sqrt{80^2 + 15.13^2} = 81.418 \text{ kN}$$


kN and its inclination is given by

$$\alpha = \tan^{-1} \left[\frac{F_y}{F_x} \right] = \tan^{-1} \left[\frac{15.13}{80} \right] = 10.71^\circ$$

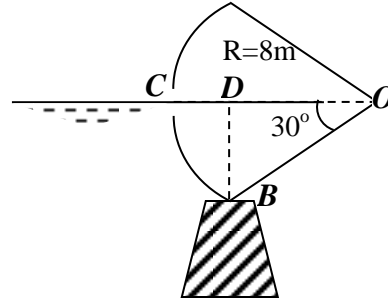

Q.22 Length of a Tainter gate perpendicular to paper is 0.50m. Find:

- i) Total horizontal thrust of water on gate.
- ii) Total vertical component of water pressure against gate.
- iii) Resultant water pressure on gate and its inclination with horizontal.

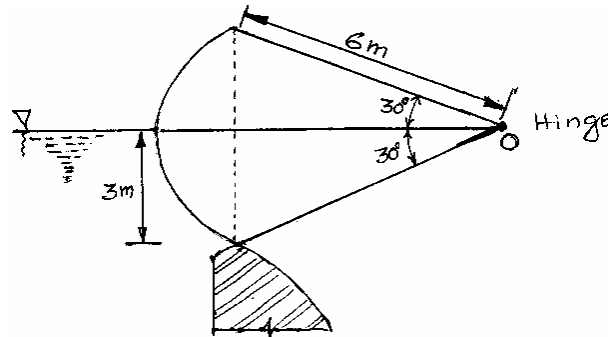

Ans: Given $L = 0.5\text{m}$,
 $AD = BC = 3\text{m}$, $\gamma W = 9.81 \text{ kN/m}^3$

(i) Total horizontal thrust of water on gate

$$F_h = \gamma W \times A \times \bar{h}$$


$$F_h = 9.81 \times (3.0 \times 0.5) \times \frac{3}{2}$$

$$F_h = 22.07 \text{ kN} \rightarrow \text{Rightward}$$

Acting at

$$\bar{h}_{c.p.} = h_c + \frac{I_G \times \sin^2 90^\circ}{A \times h_c}$$

$$\bar{h}_{c.p.} = 1.5 + \frac{\left(\frac{0.5 \times 3^3}{12}\right) \times \sin^2 90^\circ}{(3.0 \times 0.5) \times 1.5} = 1.5 + 0.5 = 2.0\text{m}$$

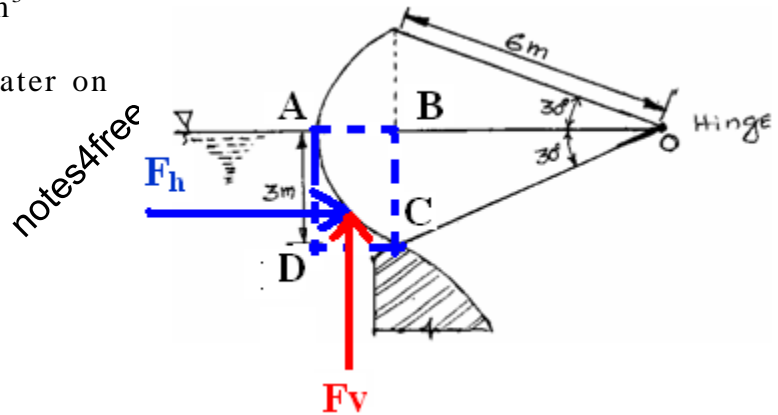

(ii) Total vertical component of water pressure against gate = upward thrust due area ABC

Upward thrust due area ABC = Area AOC - Δ OBC

$$\text{Area ABC} = \frac{\pi \times R^2}{12} - \frac{1}{2} \times \text{OB} \times \text{BC}$$

$$\text{Area ABC} = \frac{\pi \times 6^2}{12} - \frac{1}{2} \times 3 \cos 30^\circ \times 3$$

$$\text{Area ABC} = 1.636 \text{ m}^2$$

$$F_v = \gamma W \times \text{Area ABC} \times L$$

$$F_v = 9.81 \times 1.636 \times 0.5 = 8.024 \text{ kN} \quad \uparrow \text{ upward}$$

(iii) Resultant water pressure on gate and its inclination with horizontal

$$R = \sqrt{F_h^2 + F_v^2} = \sqrt{(22.07)^2 + (8.024)^2} = 23.48 \text{ kN}$$

$$\theta = \tan^{-1} \left(\frac{8.024}{22.07} \right) = 0.3637$$

Inclination $\theta = 20^\circ$

Q23. A 3.6 m x 1.5 m wide rectangular gate MN is vertical and is hinged at point 150 mm below the centre of gravity of the gate. The total depth of water is 6 m. What horizontal force must be applied at the bottom of the gate to keep the gate closed?


Solution:

Total pressure acting on the gate is F_x

$$\begin{aligned} F_x &= S_o \rho g A \bar{y} \\ &= 1000 \times 10 \times (3.6 \times 1.5) \times (6 - 3.6/2) \\ &= 226.8 \text{ kN} \end{aligned}$$

Acting at

$$\bar{h} = \bar{y} + \frac{I_g}{A \bar{y}}$$

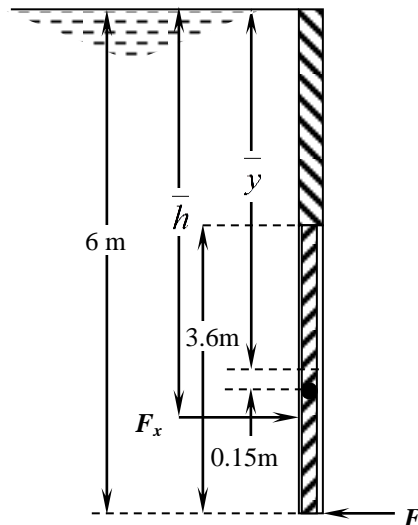

$$I_g = \frac{bd^3}{12} = \frac{1.5 \times 3.6^3}{12} = 5.832 \text{ m}^4$$

$$\bar{h} = 4.2 + \frac{5.832}{5.4 \times 4.2} = 4.457 \text{ m}$$

Let F be the force applied at the bottom of the gate required to retain the gate in equilibrium.

From the conditions of equilibrium, taking moments about the hinge, we get

$$F(1.8 - 0.15) = F_x [4.457 - (4.2 + 0.15)]$$

$$F = 14.707 \text{ kN (Ans).}$$

Q.24 A culvert in the side of a reservoir is closed by a vertical rectangular gate 2m wide and 1m deep as shown in figure. The gate is hinged about a horizontal axis which passes through the centre of the gate. The free surface of water in the reservoir is 2.5 m above the axis of the hinge. The density of water is 1000 kg/m^3 . Assuming that the hinges are frictionless and that the culvert is open to atmosphere, determine

- (i) The force acting on the gate when closed due to the pressure of water.
(ii) The moment to be applied about the hinge axis to open the gate.

Solution: (i) The total hydrostatic force

$$F = \gamma A h_c$$

$$\gamma_{\text{water}} = 1000 \times 9.81 = 9810 \text{ N/m}^3$$


$$\text{Given } A = 1\text{m} \times 2\text{m} = 2\text{m}^2$$

$$h_c = 2 + \frac{1}{2} = 2.5\text{m}$$

$$F = 9810 \times 2 \times 2.5 = 49050\text{N}$$

- (ii) The moment applied about hinge axis to open the gate is say 'M'

The centre of pressure ($h_{c,p}$):

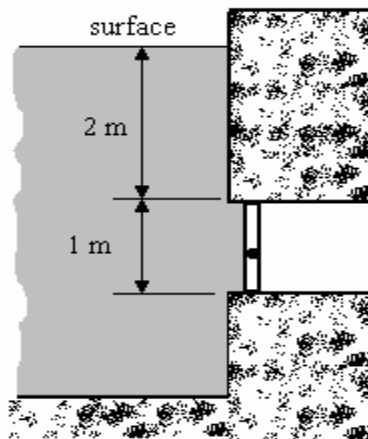

From the above $h_c = 2.5\text{m}$, $A = 2\text{m}^2$

$$(I_c)_{xx} = \frac{BD^3}{12} = \frac{2 \times 1^3}{12} = 0.167\text{m}^4$$

$$h_{C.P.} = h_c + \frac{(I_c)_{xx}}{Ah_c} = 2.5 + \frac{0.167}{2 \times 2.5} = 2.53334\text{ m}$$

Distance of Hydrostatic force (F) from the water surface = 2.5334m.

Distance of hinge from free surface = 2.5m

Distance between hinge and centre of pressure of force 'F' = 2.5334 m - 2.5m = 0.0334m

Taking moment about Hinge to open the gate 'M' = F X 0.0334 = 49050 N X 0.0334 m

The moment applied about hinge axis to open the gate 'M' = 1638.27 N-m

Q.25 Figure shows a rectangular flash board AB which is 4.5m high and is pivoted at C. What must be the maximum height of C above B so that the flash board will be on the verge of tipping when water surface is at A? Also determine if the pivot of the flash board is at a height $h = 1.5\text{m}$, the reactions at B and C when the water surface is 4m above B.

Ans:

(i) The flash board would tip about the hinge point 'C' when the line of action of resultant 'R' pressure force 'F' lies from C to A anywhere on the board.

The limiting condition being the situation when the resultant force 'F' passes through 'C'


The resultant force 'F' also passes through the centroid of the pressure diagram and the centre lies

$$\text{at } \frac{1}{3} \times AB = \frac{4.5}{3} = 1.5\text{m}$$

Hence the maximum height of 'C' from 'B' = (4.5m - 3.0m) = 1.5m (from bottom)

(ii) The pivot of the flash board is at a height $h = 1.5\text{m}$ from point B, the reactions at B and C when the water surface is 4m above B.

$$\bar{h} = \frac{4.0}{2} = 2\text{m}$$

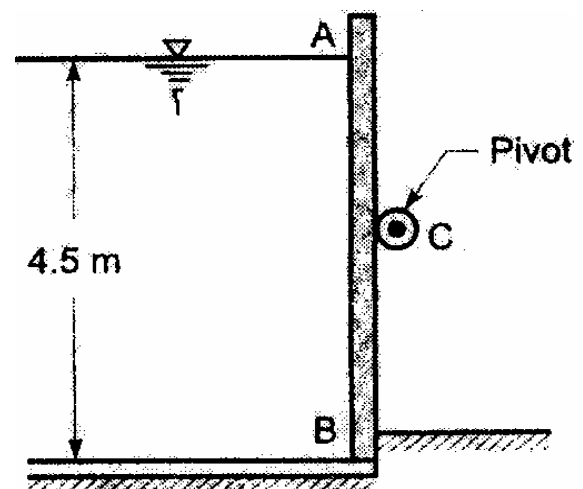

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

Hydrostatic force $P = \rho g A \bar{h} = 1000 \times 9.81 \times (4.0 \times 1.0) \times 2 = 78.48 \text{ kN}$ acting at \bar{h}_{cp}

$$h_{cp} = 2.0 + \frac{1 \times (4.0)^3 \sin^2 90^\circ}{4.0 \times 2.0} = 2.67 \text{ m from free water surface}$$

Or $h = (4.0 - 2.67) = 1.33 \text{ m}$ from bottom


Let R_A and R_B be the reaction.

$$R_A + 78.48 = R_B$$

by taking moment about pivot 'C'

$$R_A \times 2.5 + 78.48 \times 0.17 = R_B \times 1.5$$

On solving $R_A = 104.38 \text{ kN}$ $R_B = 182.86 \text{ kN}$

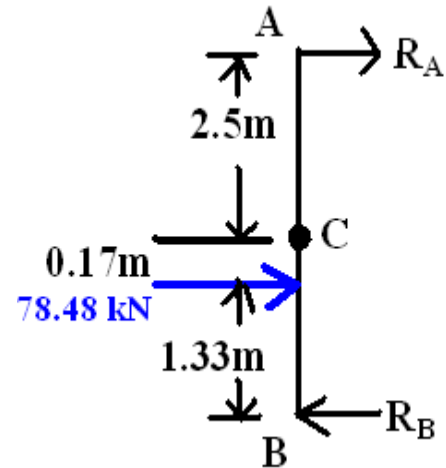

free.in

2.5 Gravity Dam:

A **gravity dam** is a dam constructed from concrete or stone masonry and designed to hold back water by primarily utilizing the weight of the material alone to resist the horizontal pressure of water pushing against it. Gravity dams are designed so that each section of the dam is stable, independent of any other dam section

Gravity dams generally require stiff rock foundations of high bearing strength (slightly weathered to fresh); although they have been built on soil foundations in rare cases. The bearing strength of the foundation limits the allowable position of the resultant which influences the overall stability. Also, the stiff nature of the gravity dam structure is unforgiving to differential foundation settlement, which can induce cracking of the dam structure.

Gravity dams provide some advantages over embankment dams. The main advantage is that they can tolerate minor over-topping flows as the concrete is resistant to scouring. This reduces the requirements for a cofferdam during construction and the sizing of the spillway. Large overtopping flows are still a problem, as they can scour the foundations if not accounted for in the design. A disadvantage of gravity dams is that due to their large footprint, they are susceptible to uplift pressures which act as a de-stabilising force. Uplift pressures (buoyancy) can be reduced by internal and foundation drainage systems which reduces the pressures.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

2.5.1 Forces Acting on Gravity Dams:

Forces that act on a gravity dam (Fig.1) are due to:

- Water Pressure(Hydrostatic)
- Uplift Pressure
- Earthquake Acceleration
- Silt Pressure
- Wave Pressure
- Ice Pressure

>> Self Weight (W) counters the forces listed above.

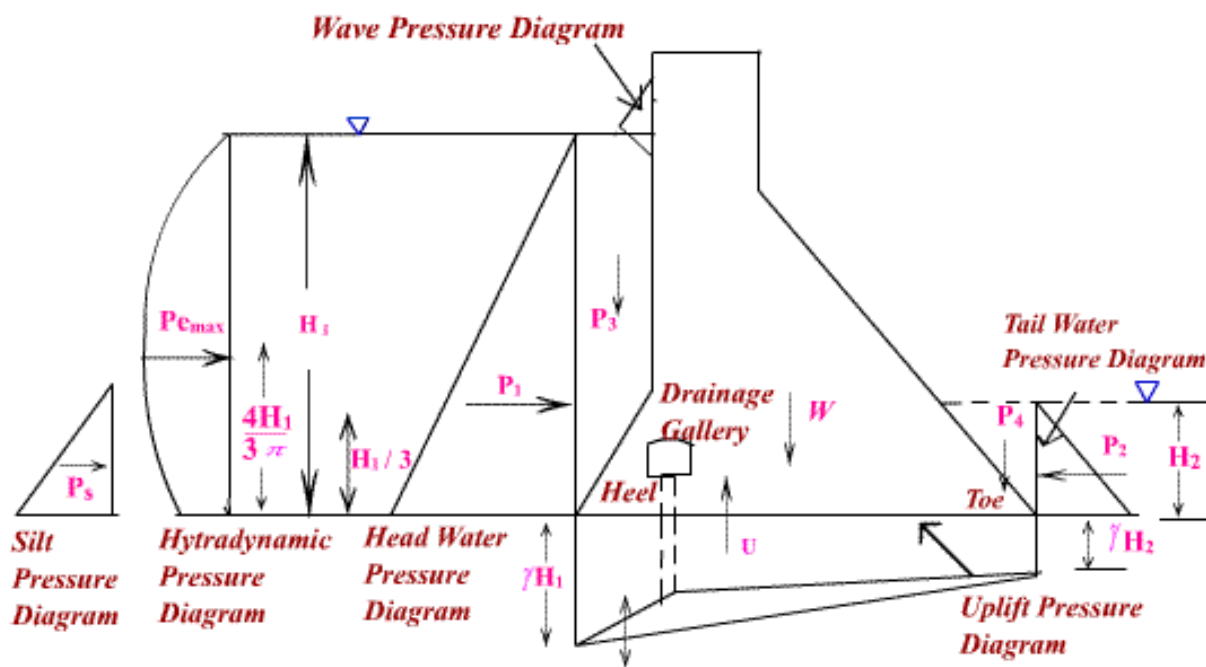


Fig. Forces on Gravity Dams

• Force due to hydrostatic Pressure:

Force due to hydrostatic Pressure is the major external force on a gravity dam. The intensity of pressure from zero at the water surface to the maximum (γH) at the base. The force due to this pressure is given by γH^2 , acting at $H/3$ from the base. In Fig.1, the forces P_1 and P_2 are due to hydrostatic pressure acting on the upstream and the downstream sides respectively. These are horizontal components of the hydrostatic force due to head water (upstream side) and tail water (downstream side) of the dam respectively.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

The forces marked as P3 and P4 are the weight of water held over the inclined faces of the dam on the upstream slope and downstream slope respectively. These are the respective vertical components of the hydrostatic force on the two faces mentioned.

- **Force due to Uplift Pressure:**

Water that seeps through the pores, cracks and fissures of the foundation material and water that seeps through the body of the dam to the bottom through the joints between the body of the dam and the foundation at the base, exert an uplift pressure on the base of the dam. The force (U) due to this acts against the weight of the dam and thus contributes to destabilizing the dam.

According to the recommendation of the United States Bureau of Reclamation (USBR), the uplift pressure intensities at the heel (upstream end) and the toe (downstream end) are taken to be equal to the respective hydrostatic pressures. A linear variation of the uplift pressure is often assumed between the heel and the toe. Drainage galleries can be provided (Fig.) to relieve the uplift pressure. In such a case, the uplift pressure diagram gets modified as shown in Fig.

- **Earthquake Forces:**

The effect of an earthquake is perceived as imparting an acceleration to the foundations of the dam in the direction in which the wave travels at that moment. It can be viewed (resolved) as horizontal and vertical components of the random acceleration.

2.6 Lock Gates

Whenever a dam or a weir is constructed across a river or canal, the water levels on both the sides of the dam will be different. If it is desired to have navigation or boating in such a river or a canal, then a chamber, known as lock, is constructed between these two different water levels. Two sets of gates (one on the upstream side and the other on downstream side of the dam) are provided as shown in fig - 1.



Fig-1 : Lock Gate

(Source: http://www.codecogs.com/library/engineering/fluid_mechanics/water_pressure/lock-gate.php)

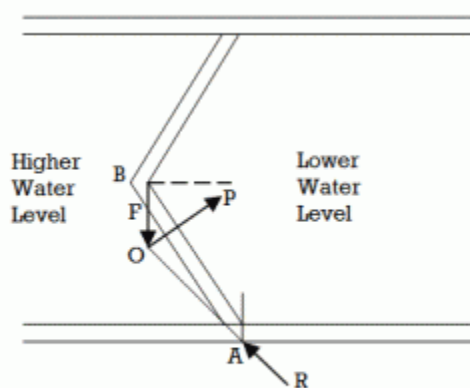


Fig-2(a) : Plan of lock gate

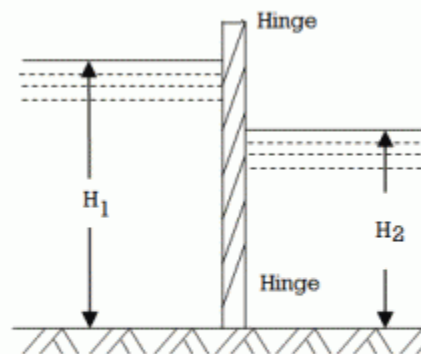


Fig-2(b) : Elevation of lock gate

Now consider a set of lock gates AB and BC hinged at the top and bottom at A and C respectively as shown in fig - 2(a). These gates will be held in contact at b by the water pressure, the water level being higher on the left hand side of the gates as shown in fig - 2(b).

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

Let,

- P = Water pressure on the gate AB or BC acting at right angles on it
- F = Force exerted by the gate BC acting normally to the contact surface of the two gates AB and BC (also known as reaction between the two gates), and
- R = Reaction at the upper and lower hinge

Since the gate AB is in equilibrium, under the action of the above three forces, therefore they will meet at one point. Let, P and F meet at O, then R must pass through this point.

Let, α = Inclination of the lock gate with the normal to the walls of the lock.

From the geometry of the figure ABO, we find that it is an isosceles triangle having its angles $\angle OBA$ and $\angle OAB$ both equal to α .

$$R \cos \alpha = F \cos \alpha$$

$$\therefore R = F \tag{1}$$

and now resolving the force at right angles to AB

$$P = R \sin \alpha + F \sin \alpha = 2R \sin \alpha$$

$$\therefore R = \frac{P}{2 \sin \alpha}$$

$$\therefore F = \frac{P}{2 \sin \alpha} \tag{2}$$

Now let us consider the water pressure on the top and bottom hinges of the gate, Let,

- H1 = Height of water to the left side of the gate.
- A1 = Wetted area (of one of the gates) on left side of the gate
- P1 = Total pressure of the water on the left side of the gate
- H2, A2, P2 = Corresponding values for right side on the gate
- RT = Reaction of the top hinge, and
- RB = Reaction of bottom hinge

Since the total reaction (R) will be shared by the two hinges (RT), therefore

$$R = R_T + R_B \tag{3}$$

and total pressure on the lock gate,

$$P = wA\bar{x}$$

$$\Rightarrow P_1 = wA_1 \times \frac{H_1}{2} = \frac{wA_1 H_1}{2}$$

Similarly, $P_2 = \frac{wA_2 H_2}{2}$

Since the directions of P1 and P2 are in the opposite direction, therefore the resultant pressure,

$$P = P_1 - P_2$$

We know that the pressure P_1 will act through its center of pressure, which is at a height of $\frac{H_1}{3}$ from the bottom of the gate. Similarly, the pressure P_2 will also act through its center of pressure which is also at a height of $\frac{H_2}{3}$ from the bottom of the gate.

A little consideration will show, that half of the resultant pressure (i.e., $P_1 - P_2$ or P) will be resisted by the hinges of one lock gate (as the other half will be resisted by the other lock gates).

$$R_T \sin \alpha \times h = \left(\frac{P_1}{2} \times \frac{H_1}{3} \right) - \left(\frac{P_2}{2} \times \frac{H_2}{3} \right) \quad (4)$$


where h is the distance between the two hinges.

Also resolving the forces horizontally,

$$P_1 - P_2 = R_B \sin \alpha + R_T \sin \alpha \quad (5)$$

From equations (4) and (5) the values of R_B and R_T may be found out.

Q. 26 Two lock gates of 7.5m height are provided in a canal of 16m width meeting at an angle of 120° . Calculate the force acting on each gate, when the depth of water on upstream side is 5m.

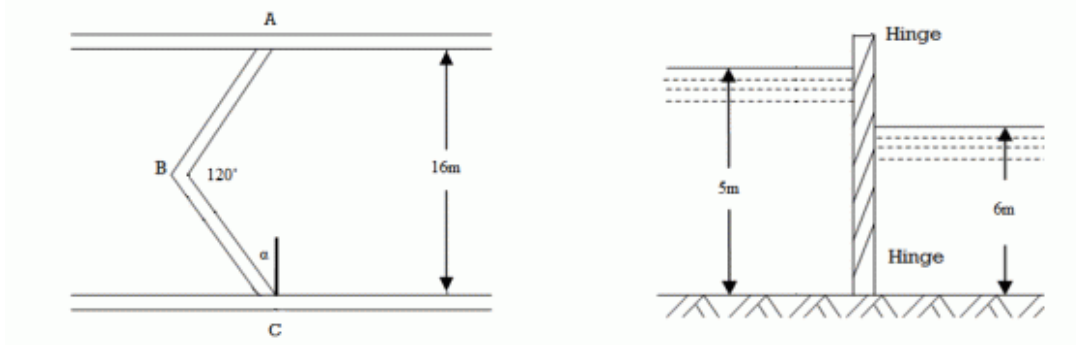

Given,

- Height of lock gates = 7.5m
- Width of lock gates = 16m
- Inclination of gates = 120°
- $H = 5$ m

From the geometry of the lock gate, we find that inclination of the lock gates with the walls,

$$\alpha = \frac{180^\circ - 120^\circ}{2} = 30^\circ$$

and

$$\text{width of each gate} = \frac{16/2}{\cos \alpha} = \frac{8}{\cos 30^\circ} = 9.24 \text{ m}$$

\therefore Wetted area of each gate, $A = 5 \times 9.24 = 46.2 \text{ m}^2$ and force acting on each gate,

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

$$P = wA \times \frac{H}{2} = 9.81 \times 46.2 \times \frac{5}{2} = 1133 \text{ KN}$$

15 CV 33 FLUID MECHANICS NOTES

MODULE-2

- **Module-2A : Hydrostatic forces on Surfaces**
- **Module-2B : Fundamentals of fluid flow (Kinematics)**

by

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka State

Module-2B: Fundamentals of fluid flow (Kinematics)


Introduction. Methods of describing fluid motion. Velocity and Total acceleration of a fluid particle. Types of fluid flow, Description of flow pattern. Basic principles of fluid flow, three-dimensional continuity equation in Cartesian coordinate system. Derivation for Rotational and irrotational motion. Potential function, stream function, orthogonality of streamlines and equipotential lines. Numerical problems in Stream function and velocity potential. Introduction to flow net.

2.7 Methods of Describing Fluid Motion:

Fluid kinematics refers to the features of a fluid in motion. It only deals with the motion of fluid particles without taking into account the forces causing the motion. Considerations of velocity, acceleration, flow rate, nature of flow and flow visualization are taken up under fluid kinematics.

A fluid motion can be analyzed by one of the two alternative approaches, called Lagrangian and Eulerian.

In Lagrangian approach, a particle or a fluid element is identified and followed during the course of its motion with time as demonstrated in

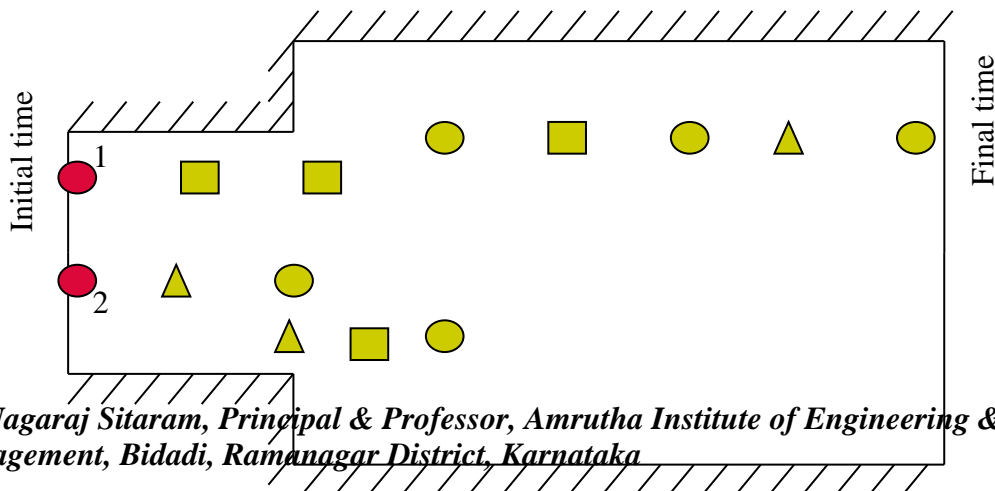

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

Fig. Lagrangian Approach (Study of each particle with time)

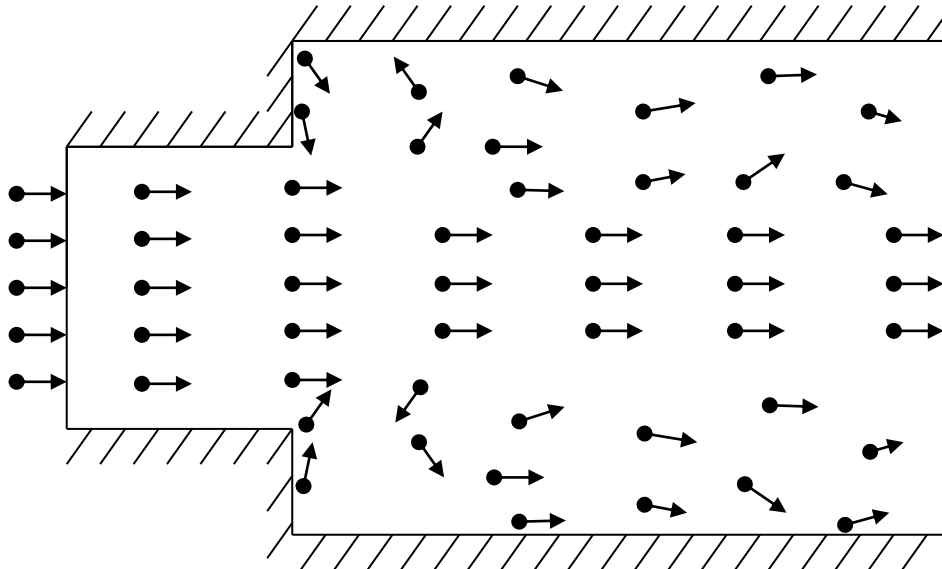


Fig. Eulerian Approach (Study at fixed station in space)

Example: To know the attributes of a vehicle to be purchased, you can follow the specific vehicle in the traffic flow all along its path over a period of time.

Difficulty in tracing a fluid particle makes it nearly impossible to apply the Lagrangian approach. The alternative approach, called Eulerian approach consists of observing the fluid by setting up fixed stations (sections) in the flow field (Fig.).

Motion of the fluid is specified by velocity components as functions of space and time. This is considerably easier than the previous approach and is followed in Fluid Mechanics.

Example: Observing the variation of flow properties in a channel like velocity, depth etc, at a section.

2.8 Velocity

Velocity of a fluid along any direction can be defined as the rate of change of displacement of the fluid along that direction.

$$u = \frac{dx}{dt}$$

Where dx is the distance traveled by the fluid in time dt.

Velocity of a fluid element is a vector, which is a function of space and time.

Let V be the resultant velocity of a fluid along any direction and u, v and w be the velocity components in x, y and z-directions respectively.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

Mathematically the velocity components can be written as

$$u = f(x, y, z, t)$$

$$v = f(x, y, z, t)$$

$$w = f(x, y, z, t)$$

and $V = ui + vj + wk = \quad |V| = \sqrt{u^2 + v^2 + w^2}$

Where $u = \frac{dx}{dt}; v = \frac{dy}{dt}, w = \frac{dz}{dt}$

2.9 Acceleration

Acceleration of a fluid element along any direction can be defined as the rate of change of velocity of the fluid along that direction.

If a_x, a_y and a_z are the components of acceleration along-x, y and z- directions respectively, they can be mathematically written as

$$a_x = \frac{du}{dt}$$

But $u = f(x, y, z, t)$ and hence by chain rule we can write,

$$a_x = \frac{\partial u}{\partial x} \frac{dx}{dt} + \frac{\partial u}{\partial y} \frac{dy}{dt} + \frac{\partial u}{\partial z} \frac{dz}{dt} + \frac{\partial u}{\partial t}$$

Similarly

$$a_y = \frac{\partial v}{\partial x} \frac{dx}{dt} + \frac{\partial v}{\partial y} \frac{dy}{dt} + \frac{\partial v}{\partial z} \frac{dz}{dt} + \frac{\partial v}{\partial t}$$

and $a_z = \frac{\partial w}{\partial x} \frac{dx}{dt} + \frac{\partial w}{\partial y} \frac{dy}{dt} + \frac{\partial w}{\partial z} \frac{dz}{dt} + \frac{\partial w}{\partial t}$

But $u = \frac{dx}{dt}; v = \frac{dy}{dt}, w = \frac{dz}{dt}$

Hence

$$\left. \begin{array}{l} a_x = u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} + w \frac{\partial u}{\partial z} + \frac{\partial u}{\partial t} \\ a_y = u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} + w \frac{\partial v}{\partial z} + \frac{\partial v}{\partial t} \end{array} \right\} \text{Total Acceleration}$$

Convective accln
Local accln

If A is the resultant acceleration vector, it is given by

For steady flow, the local acceleration will be zero

Problems

2.10 Types of fluid flow

2.10.1 Steady and unsteady flows:

A flow is said to be steady if the properties (P) of the fluid and flow do not change with time (t) at any section or point in a fluid flow.

$$A = a_x i + a_y j + a_z k$$
$$|a| = \sqrt{a_x^2 + a_y^2 + a_z^2}$$

$$\frac{\partial}{\partial t}(P) = 0$$

A flow is said to be unsteady if the properties (P) of the fluid and flow change with time (t) at any section or point in a fluid flow.

$$\frac{\partial}{\partial t}(P) \neq 0$$

Example: Flow observed at a dam section during rainy season, wherein, there will be lot of inflow with which the flow properties like depth, velocity etc.. will change at the dam section over a period of time representing it as unsteady flow.

2.10.2. Uniform and non-uniform flows:

A flow is said to be uniform if the properties (P) of the fluid and flow do not change (with direction) over a length of flow considered along the flow at any instant.

$$\frac{\partial}{\partial x}(P) = 0$$

A flow is said to be non-uniform if the properties (P) of the fluid and flow change (with direction) over a length of flow considered along the flow at any instant.

$$\frac{\partial}{\partial x}(P) \neq 0$$

Example Flow observed at any instant, at the dam section during rainy season, wherein, the flow varies from the top of the overflow section to the foot of the dam and the flow properties like depth, velocity etc., will change at the dam section at any instant between two sections, representing it as non-uniform flow.

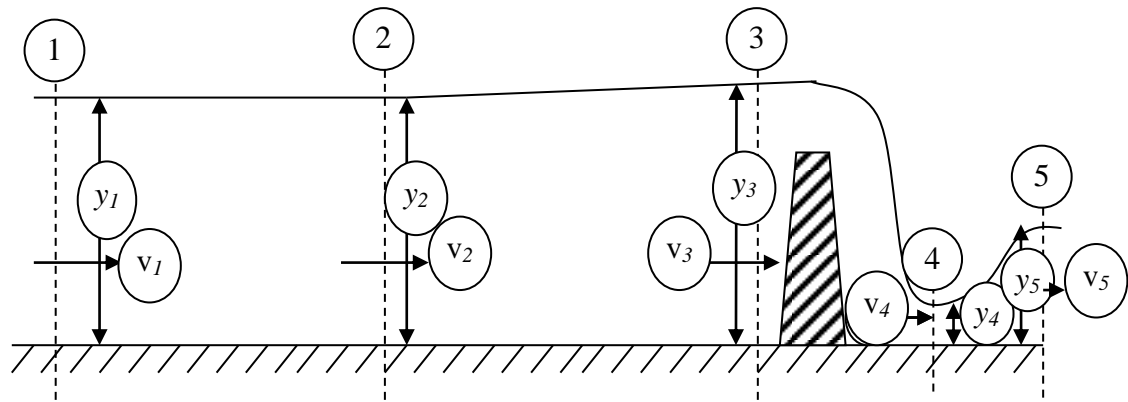


Fig. Different types of fluid flow

Consider a fluid flow as shown above in a channel. The flow is said to be steady at sections 1 and 2 as the flow does not change with respect to time at the respective sections ($y_1=y_2$ and $v_1 = v_2$).

The flow between sections 1 and 2 is said to be uniform as the properties does not change between the sections at any instant ($y_1=y_2$ and $v_1 = v_2$).

The flow between sections 2 and 3 is said to be non-uniform flow as the properties vary over the length between the sections.

Non-uniform flow can be further classified as Gradually varied flow and Rapidly varied flow. As the name itself indicates, Gradually varied flow is a non-uniform flow wherein the flow/fluid properties vary gradually over a long length (Example between sections 2 and 3).

Rapidly varied flow is a non-uniform flow wherein the flow/fluid properties vary rapidly within a very short distance. (Example between sections 4 and 5).

Combination of steady and unsteady flows and uniform and non-uniform flows can be classified as steady-uniform flow (Sections 1 and 2), unsteady-uniform flow, steady-non-uniform flow (Sections 2 and 3) and unsteady-non-uniform flow (Sections 4 and 5).

2.10.3 One, Two and Three Dimensional flows

Flow is said to be one-dimensional if the properties vary only along one axis / direction and will be constant with respect to other two directions of a three-dimensional axis system.

Flow is said to be two-dimensional if the properties vary only along two axes / directions and will be constant with respect to other direction of a three-dimensional axis system.

Flow is said to be three-dimensional if the properties vary along all the axes / directions of a three-dimensional axis system.

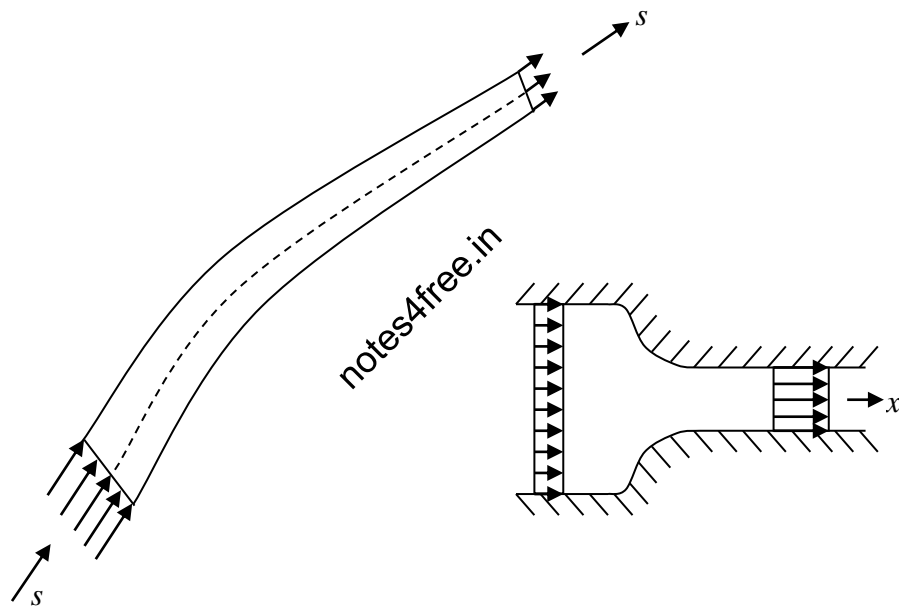


Fig. a) One- dimensional flow

Fig. b) Two-dimensional flow

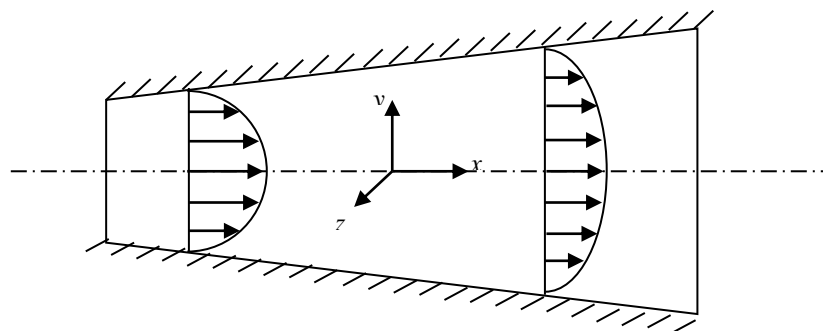


Fig. c) Three-dimensional flow

2.10.4. Description of flow pattern

Laminar and Turbulent flows:

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

When the flow occurs like sheets or laminates and the fluid elements flowing in a layer does not mix with other layers, then the flow is said to be laminar when the Reynolds number (Re) for the flow will be less than 2000.

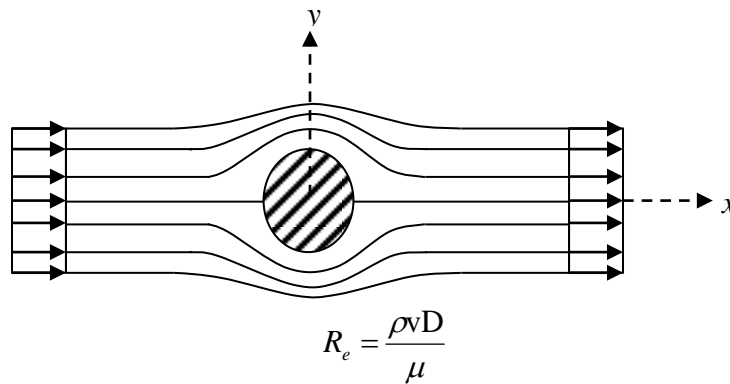


Fig. 5 Laminar flow

When the flow velocity increases, the sheet like flow gets mixes with other layer and the flow of fluid elements become random causing turbulence. There will be eddy currents generated and flow reversal takes place. This flow is said to be Turbulent when the Reynolds number for the flow will be greater than 4000. For flows with Reynolds number between 2000 to 4000 is said to be transition flow.

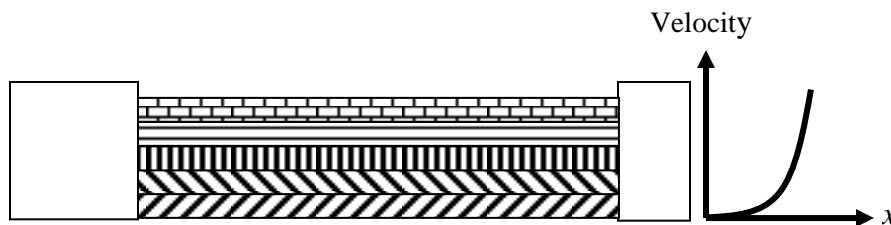


Fig. Compressible and Incompressible flows:

Flow is said to be Incompressible if the fluid density does not change (constant) along the flow direction and is Compressible if the fluid density varies along the flow direction

$\rho = \text{Constant}$ (incompressible) and $\rho \neq \text{Constant}$ (compressible)

2.10.5 Path line, Streamline, Streak line and Stream tube:

Path Line: It is the path traced by a fluid particle over a period of time during its motion along the fluid flow.

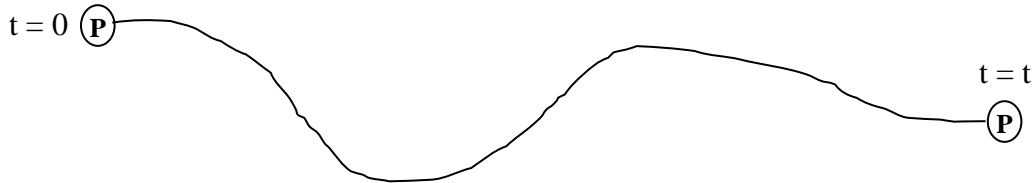


Fig. 7 Path line

Example Path traced by an ant coming out from its dwelling

Stream Lines

It is an imaginary line such that when a tangent is drawn at any point it gives the velocity of the fluid particle at that point and at that instant.

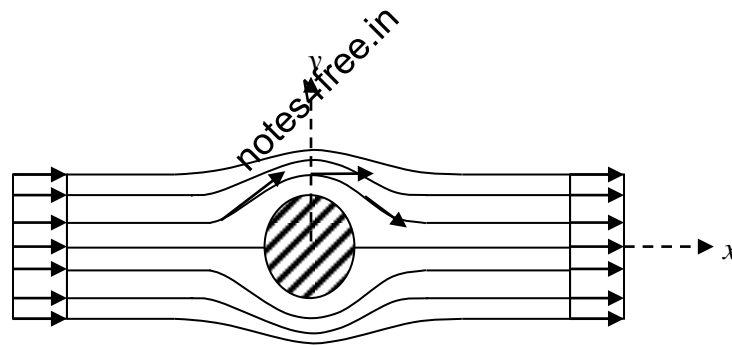


Fig. Stream lines

Example Path traced by the flow when an obstruction like a sphere or a stick is kept during its motion. The flow breaks up before the obstruction and joins after it crosses it.

Streak lines:

It is that imaginary line that connects all the fluid particles that has gone through a point/section over a period of time in a fluid motion.

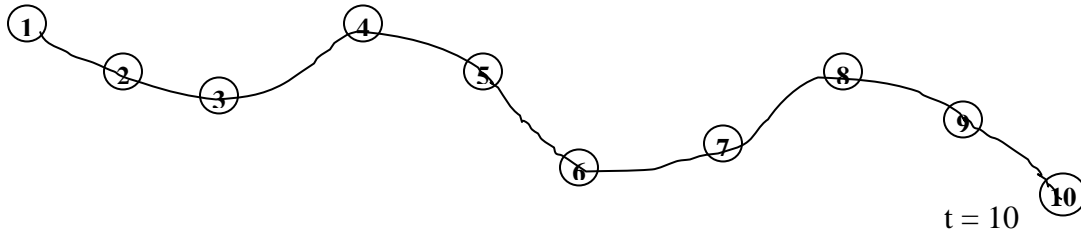


Fig. Streak lines

Stream tube:

It is an imaginary tube formed by stream line on its surface such that the flow only enters the tube from one side and leaves it on the other side only. No flow takes place across the stream tube. This concept will help in the analysis of fluid motion.

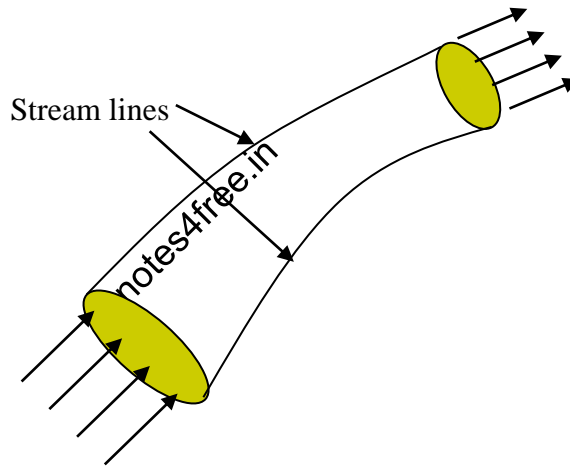


Fig. Stream tube

2.10.6. Rotational and Irrotational flows:

Flow is said to be Rotational if the fluid elements does not rotate about their own axis as they move along the flow and is Rotational if the fluid elements rotate along their axis as they move along the flow direction


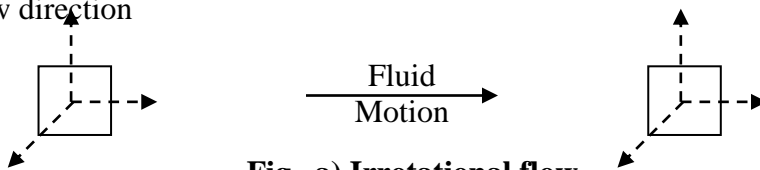


Fig. a) Irrotational flow

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka



We know that for an irrotational two dimensional fluid flow, the rotational fluid elements about z axis must be zero.

$$w_z = \frac{1}{2} \left[\frac{\partial v}{\partial x} - \frac{\partial u}{\partial y} \right]$$

Substituting for u and v in terms of velocity potential- ϕ , we get

$$w_z = \frac{1}{2} \left[\frac{\partial}{\partial x} \left(-\frac{\partial \phi}{\partial y} \right) - \frac{\partial}{\partial y} \left(-\frac{\partial \phi}{\partial x} \right) \right] = \frac{1}{2} \left[\frac{\partial^2 \phi}{\partial x \partial y} - \frac{\partial^2 \phi}{\partial y \partial x} \right] = 0 \text{ Laplace Eq.}$$

Hence for the flow to be irrotational, the second partial derivative of Velocity potential - ϕ must be zero. This is true only when ϕ is a continuous function and exists.

Thus the properties of a velocity potential are:

1. If the velocity potential ϕ exists, then the flow should be irrotational
2. If the velocity potential ϕ satisfies the *Laplace Equation*, then it represents a possible case of a fluid flow.

Similarly for stream function ψ

$$w_z = \frac{1}{2} \left[\frac{\partial v}{\partial x} - \frac{\partial u}{\partial y} \right]$$

Substituting for u and v in terms of stream function- ψ , we get

$$w_z = \frac{1}{2} \left[\frac{\partial}{\partial x} \left(\frac{\partial \psi}{\partial x} \right) - \frac{\partial}{\partial y} \left(-\frac{\partial \psi}{\partial y} \right) \right] = \frac{1}{2} \left[\frac{\partial^2 \psi}{\partial x^2} + \frac{\partial^2 \psi}{\partial y^2} \right] = 0 \text{ Laplace Eq.}$$

The above equation is known as *Laplace equation* in ψ

Thus the properties of a Stream function are:

1. If the Stream function ψ exists, then it represents a possible case of a fluid flow.
2. If the Stream function ψ satisfies the *Laplace Equation*, then the flow should be irrotational.

2.10.7 Basic principles of fluid flow:

The derivation is based on the concept of Law of conservation of mass.

Continuity Equation

Statement: The flow of fluid in a continuous flow across a section is always a constant. Consider an enlarging section in a fluid flow of fluid density γ . Consider two sections 1 and 2 as shown in Fig. Let the sectional properties be as under

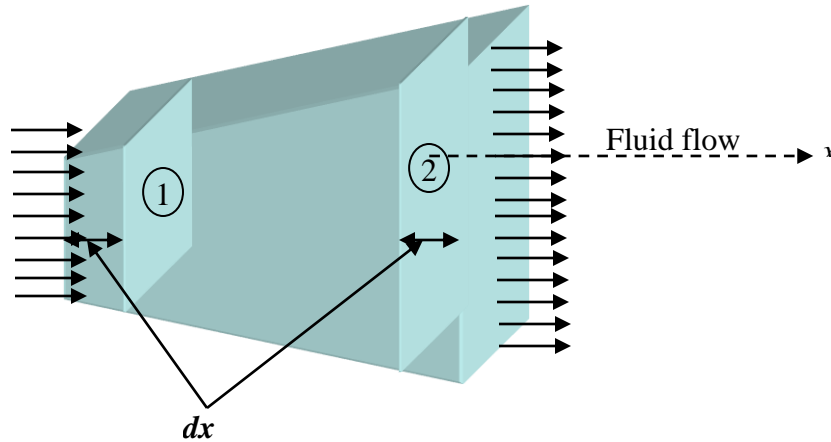


Fig. Fluid flow through a control volume

A_1 and A_2 = Cross-sectional area, V_1 and V_2 = Average flow velocity and

ρ_1 and ρ_2 = Fluid density at Section-1 and Section-2 respectively

dt is the time taken for the fluid to cover a distance dx

The mass of fluid flowing across section 1-1 is given by

$$m_1 = \text{Density at section 1} \times \text{volume of fluid that has crossed section 1} = \rho_1 \times A_1 \times dx$$

Mass rate of fluid flowing across section 1-1 is given by

$$\frac{m_1}{dt} = \frac{(\text{Density at section - 1} \times \text{volume of fluid that has crossed section - 1})}{dt}$$

$$\rho_1 \times A_1 \times \frac{dx}{dt} = \rho_1 \times A_1 \times V_1 \dots \dots \text{Eq.1}$$

Similarly Mass rate of fluid flowing across section 2-2 is given by

$$\frac{m_2}{dt} = \frac{(\text{Density at section - 2} \times \text{volume of fluid that has crossed section - 2})}{dt}$$

$$\rho_2 \times A_2 \times \frac{dx}{dt} = \rho_2 \times A_2 \times V_2 \dots \dots \text{Eq.2}$$

From law of conservation of mass, mass can neither be created nor destroyed. Hence, from Eqs. 1 and 2, we get

$$\rho_1 \times A_1 \times V_1 = \rho_2 \times A_2 \times V_2 \quad \text{Eq.3}$$

If the density of the fluid is same on both side and flow is incompressible then $\rho_1 = \rho_2$ the equation 3 reduces to $A_1 \times V_1 = A_2 \times V_2$

The above equations discharge continuity equation in one dimensional form for a steady, incompressible fluid flow.

Rate of flow or Discharge (Q):

Rate of flow or discharge is said to be the quantity of fluid flowing per second across a section of a flow. Rate of flow can be expressed as mass rate of flow or volume rate of flow. Accordingly

Mass rate of flow = Mass of fluid flowing across a section / time

Rate of flow = Volume of fluid flowing across a section / time

2.10.7.1 Continuity Equation in three dimensional or differential form

Consider a parallelepiped ABCDEFGH in a fluid flow of density γ as shown in Fig. Let the dimensions of the parallelepiped be dx , dy and dz along x , y and z directions respectively. Let the velocity components along x , y and z be u , v and w respectively.

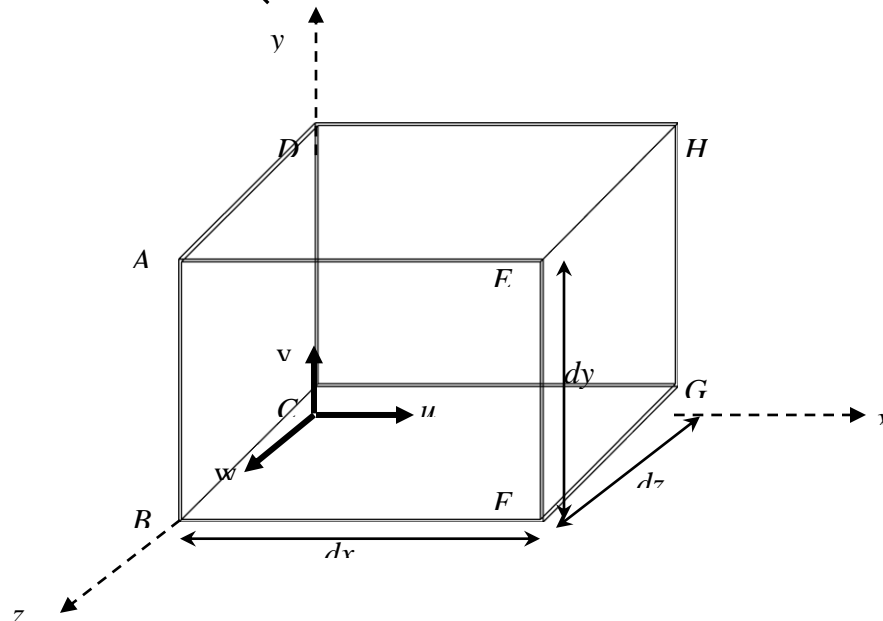


Fig. Parallelepiped in a fluid flow

Mass rate of fluid flow entering the section ABCD along x direction is given by $\rho \times \text{Area} \times V_x$

$$M_{x1} = \rho u dy dz \quad \dots(01)$$

Similarly mass rate of fluid flow leaving the section EFGH along x direction is given by,

$$M_{x2} = \left[\rho u + \frac{\partial}{\partial x}(\rho u) dx \right] dy dz \quad \dots(02)$$

Net gain in mass rate of the fluid along the x axis is given by the difference between the mass rate of flow entering and leaving the control volume. i.e. Eq. 1 – Eq. 2

$$dM_x = \rho u dy dz - \left[\rho u + \frac{\partial}{\partial x}(\rho u) dx \right] dy dz$$

$$dM_x = - \frac{\partial}{\partial x}(\rho u) dx dy dz \quad \dots(03)$$

Similarly net gain in mass rate of the fluid along the y and z axes are given by

$$dM_y = - \frac{\partial}{\partial y}(\rho v) dx dy dz \quad \dots(04)$$

$$dM_z = - \frac{\partial}{\partial z}(\rho w) dx dy dz \quad \dots(05)$$

Net gain in mass rate of the fluid from all the three axes are given by

$$dM = - \frac{\partial}{\partial x}(\rho u) dx dy dz - \frac{\partial}{\partial y}(\rho v) dx dy dz - \frac{\partial}{\partial z}(\rho w) dx dy dz$$

From law of conservation of Mass, the net gain in mass rate of flow should be zero and hence

$$\left[\frac{\partial}{\partial x}(\rho u) + \frac{\partial}{\partial y}(\rho v) + \frac{\partial}{\partial z}(\rho w) \right] dx dy dz = 0$$

or

$$\left[\frac{\partial}{\partial x}(\rho u) + \frac{\partial}{\partial y}(\rho v) + \frac{\partial}{\partial z}(\rho w) \right] = 0$$

This expression is known as the general Equation of Continuity in three dimensional form or differential form.

If the fluid is incompressible then the density is constant and hence

$$\left[\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} \right] = 0$$

The continuity equation in two-dimensional form for compressible and incompressible flows is respectively as below

$$\left[\frac{\partial}{\partial x}(\rho u) + \frac{\partial}{\partial y}(\rho v) \right] = 0$$

$$\left[\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} \right] = 0$$

2.10.8 Velocity Potential Function (ϕ) and Stream Function (ψ):

2.10.8.1 Velocity Potential (ϕ):

Velocity Potential ϕ is a scalar function of space and time such that its negative derivative with respect to any direction gives the velocity component in that direction

Thus $\phi = \phi(x, y, z, t)$ and flow is steady then,

$$u = -(\partial \phi / \partial x); v = -(\partial \phi / \partial y); w = -(\partial \phi / \partial z)$$

Continuity equation for a three dimensional fluid flow is given by

$$[(\partial u / \partial x) + (\partial v / \partial y) + (\partial w / \partial z)] = 0$$

Substituting for u, v and w, we get

$$[(\partial / \partial x)(-\partial \phi / \partial x) + (\partial / \partial y)(-\partial \phi / \partial y) + (\partial / \partial z)(-\partial \phi / \partial z)] = 0$$

$$\text{i.e. } [(\partial^2 \phi / \partial x^2) + (\partial^2 \phi / \partial y^2) + (\partial^2 \phi / \partial z^2)] = 0$$

The above equation is known as Laplace equation in ϕ

For a 2 D flow the above equation reduces to

$$[(\partial^2 \phi / \partial x^2) + (\partial^2 \phi / \partial y^2)] = 0$$

We know that for an irrotational two dimensional fluid flow, the rotational fluid elements about z axis must be zero. i.e. $\omega_z = \frac{1}{2} [(\partial v / \partial x) - (\partial u / \partial y)]$

Substituting for u and v, we get

$$\omega_z = \frac{1}{2} [(\partial / \partial x)(-\partial \phi / \partial y) - (\partial / \partial y)(-\partial \phi / \partial x)]$$

For the flow to be irrotational, the above component must be zero

$$\omega_z = \frac{1}{2} [(-\partial^2 \phi / \partial x \partial y) - (-\partial^2 \phi / \partial y \partial x)] = 0$$

$$\text{i.e. } (-\partial^2 \phi / \partial x \partial y) = (-\partial^2 \phi / \partial y \partial x)$$

This is true only when ϕ is a continuous function and exists.

Thus the properties of a velocity potential are:

1. If the velocity potential ϕ exists, then the flow should be irrotational.
2. If the velocity potential ϕ satisfies the Laplace Equation, then it represents a possible case of a fluid flow.

Equi-potential lines:

It is an imaginary line along which the velocity potential ϕ is a constant

i.e. $\phi = \text{Constant}$

$$\therefore d\phi = 0$$

But $\phi = f(x, y)$ for a two dimensional steady flow

$$\therefore d\phi = (\partial \phi / \partial x)dx + (\partial \phi / \partial y)dy$$

Substituting the values of u and v , we get

$$d\phi = -u dx - v dy \Rightarrow 0$$

or $u dx = -v dy$

or $(dy/dx) = -u/v$... (01)

Where dy/dx is the slope of the equi-potential line.

2.10.8.2 Stream Function (ψ)

Stream Function ψ is a scalar function of space and time such that its partial derivative with respect to any direction gives the velocity component at right angles to that direction.

Thus $\psi = \psi(x, y, z, t)$ and flow is steady then

$$u = -(\partial \psi / \partial y); v = (\partial \psi / \partial x)$$

Continuity equation for a two dimensional fluid flow is given by

$$[(\partial u / \partial x) + (\partial v / \partial y)] = 0$$

Substituting for u and v , we get

$$[(\partial / \partial x)(-\partial \psi / \partial y) + (\partial / \partial y)(\partial \psi / \partial x)] = 0$$

$$\text{i.e. } [(-\partial^2 \psi / \partial x \partial y) + (\partial^2 \psi / \partial y \partial x)] = 0$$

$$\text{or } (\partial^2 \psi / \partial x \partial y) = (\partial^2 \psi / \partial y \partial x)$$

This is true only when ψ is a continuous function.

We know that for an irrotational two dimensional fluid flow, the rotational fluid elements about z axis must be zero. i.e. $\omega_z = 1/2 [(\partial v / \partial x) - (\partial u / \partial y)]$

Substituting for u and v , we get

$$\omega_z = 1/2 [(\partial / \partial x)(\partial \psi / \partial x) - (\partial / \partial y)(-\partial \psi / \partial y)]$$

For the flow to be irrotational, the above component must be zero

$$\text{i.e. } [(\partial^2 \psi / \partial x^2) + (\partial^2 \psi / \partial y^2)] = 0$$

The above equation is known as **Laplace equation** in ψ

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

Thus the properties of a Stream function are:

1. If the Stream function ψ exists, then it represents a possible case of a fluid flow.
2. If the Stream function ψ satisfies the Laplace Equation, then the flow should be irrotational.

Line of constant stream function or stream line

It is an imaginary line along which the stream function ψ is a constant

i.e. $\psi = \text{Constant}$

$$d\psi = 0$$

But $\psi = f(x,y)$ for a two dimensional steady flow

$$d\psi = (\partial\psi/\partial x)dx + (\partial\psi/\partial y)dy$$

Substituting the values of u and v , we get

$$d\psi = v dx - u dy \Rightarrow 0$$

or $v dx = u dy$

or $(dy/dx) = v/u$

... (02)

Where dy/dx is the slope of the Stream line.

From Eqs. 1 and 2, we get that the product of the slopes of equi-potential line and stream line is given by -1. Thus, the equi-potential lines and stream lines are orthogonal to each other at all the points of intersection.

2.10.8.3 Relationship between Stream function (ψ) and Velocity potential (ϕ)

We know that the velocity components are given by

$$u = -(\partial\phi/\partial x) \quad v = -(\partial\phi/\partial y)$$

and $u = (\partial\psi/\partial y) \quad v = (\partial\psi/\partial x)$

Relation between (ϕ and ψ):

$$\begin{aligned} u &= -\frac{\partial\phi}{\partial x} = \frac{\partial\psi}{\partial y} \\ v &= -\frac{\partial\phi}{\partial y} = \frac{\partial\psi}{\partial x} \end{aligned}$$

Thus $u = -(\partial\phi/\partial x) = (\partial\psi/\partial y)$ and $v = -(\partial\phi/\partial y) = (\partial\psi/\partial x)$

Hence $(\partial\phi/\partial x) = (\partial\psi/\partial y)$ and $(\partial\phi/\partial y) = -(\partial\psi/\partial x)$


ϕ -lines and ψ -lines intersect orthogonally

2.11 Flow net & its Applications:

A grid obtained by drawing a series of equi-potential lines and stream lines is called a Flow net. The flow net is an important tool in analysing two dimensional flow irrotational flow problems.

A grid obtained by drawing a series of streamlines (ψ) and equipotential (ϕ) lines is known as flow net. The construction of flow net (ϕ - ψ lines) is restricted by certain conditions


- ✓ The flow should be two dimensional
- ✓ The flow should be steady
- ✓ The flow should be Irrotational
- ✓ The flow is not governed by gravity force

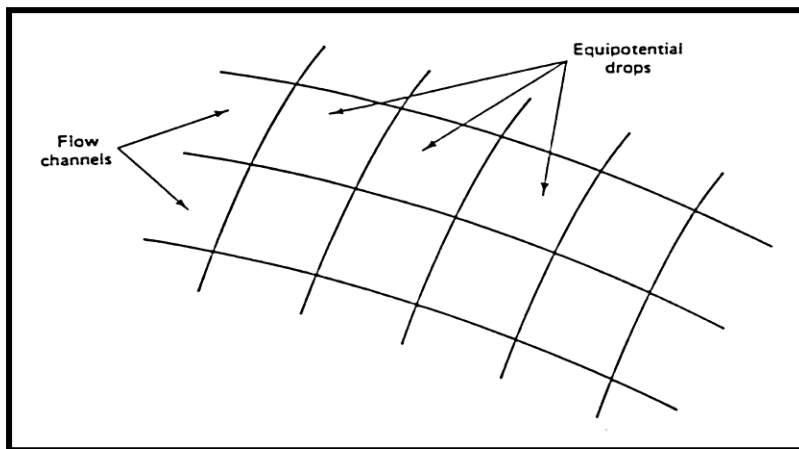

Uses of Flow net

To determine

- The streamlines and equipotential lines
- Quantity of seepage, upward lift pressure below the hydraulic structures (dam, gate, locks etc.)
- Velocity and pressure distribution, for given boundaries of flow
- To design streamlined structure
- Flow pattern near well

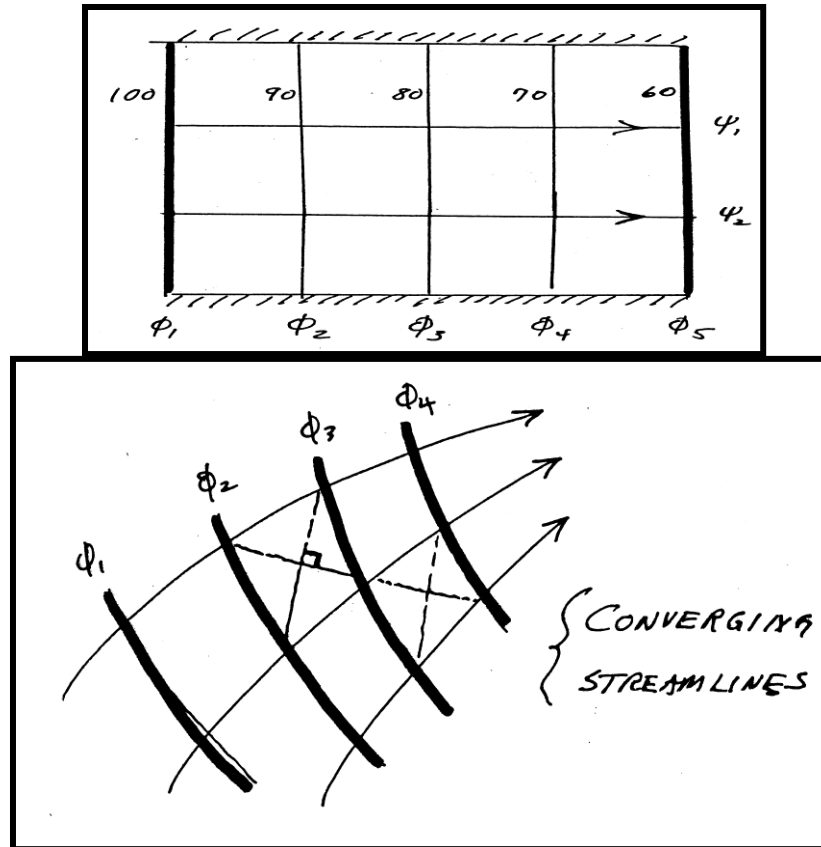

Methods of Drawing flow net

- Analytical Method
- Graphical Method
- Electrical Analogy Method
- Hydraulic Models
- Relaxation Method
- Hele Shaw or Viscous Analogy Method

The practical use of streamlines and velocity potential lines are:

- (i) Quantity of seepage
- (ii) Upward lift pressure below the hydraulic structures (dam, gate, locks etc.)
- (iii) Velocity and pressure distribution, for given boundaries of flow
- (iv) To design streamlined structure flow pattern near well

Solved Problems:

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

Q.1. The velocity field in a fluid is given by,

$$\mathbf{V}_s = (3x + 2y)\mathbf{i} + (2z + 3x^2)\mathbf{j} + (2t - 3z)\mathbf{k}$$

- i. What are the velocity components u , v , and w ?
- ii. Determine the speed at the point $(1,1,1)$.
- iii. Determine the speed at time $t=2$ s at point $(0,0,2)$

$$u = (3x + 2y), v = (2z + 3x^2), w = (2t - 3z)$$

Solution: The velocity components at any point (x, y, z) are

Substitute $x=1, y=1, z=1$ in the above expression

$$u = (3*1+2*1) = 5, v = (2*1+3*1) = 5, w = (2t-3)$$

$$\begin{aligned} V^2 &= u^2 + v^2 + w^2 \\ &= 5^2 + 5^2 + (2t-3)^2 \end{aligned}$$

$$\begin{aligned} V_{(1,1,1)} &= \sqrt{(4t^2 - 12t + 59)} \\ &= 4t^2 - 12t + 59 \end{aligned}$$

Substitute $t = 2$ s, $x=0, y=0, z=2$ in the above expression for u, v and w

$$u = 0, v = (4 + 0) = 4, w = (4 - 6) = -2$$

$$V^2_{(0,0,2,2)} = (0 + 15 + 4) = 20$$

$$V = 4.472 \text{ units}$$

Q. 2. The velocity distribution in a three-dimensional flow is given by:

$u = -x, v = 2y$ and $w = (3-z)$. Find the equation of the stream line that passes through point $(1,1,1)$.

$$\begin{aligned} \frac{dx}{u} &= \frac{dy}{v} = \frac{dz}{w} \text{ or } \frac{dx}{-x} = \frac{dy}{2y} = \frac{dz}{(3-z)} \\ \frac{dx}{-x} &= \frac{dy}{2y} \end{aligned}$$

Solution: The stream line equation is given by

Integrating we get

Where A is an integral constant. Substituting $x=1$ & $y=1, A = 0$

Considering the x and z components,

$$\frac{dx}{-x} = \frac{dy}{(3-z)}$$

$$-\log_e x = -\log_e (3-z) + B,$$

Integrating we get

Where B is an integral constant. Substituting $x=1$ & $z=1$, $B = \log_e 2$

$$\therefore -\log_e x = -\log_e (3-z) + \log_e 2 = -\log_e \left(\frac{3-z}{2} \right)$$

$$\text{or } x = \left(\frac{3-z}{2} \right)$$

From Eqs. 1 and 2, the final equation of the stream line that passes through the point (1,1,1) is

$$x = \frac{1}{\sqrt{y}} = \left(\frac{3-z}{2} \right)$$

Q3. A fluid particle moves in the following flow field starting from the points (2,1,0) at $t=0$.

Determine the location of the fluid particle at $t = 3$ s

$$u = \frac{t^2}{2x}, v = \frac{ty^2}{18}, w = \frac{z}{2t}$$

Solution

Integrating we get

$$u = \frac{dx}{dt} = \frac{t^2}{2x} \text{ or } 2x dx = t^2 dt$$

$$x^2 = \frac{t^3}{3} + A$$

$$x^2 = \frac{t^3}{3} + 4$$

$$x^2 = \frac{3^3}{3} + 4 = \sqrt{13}$$

Where A is an integral constant. Substituting $x=2$, $t=0$, $A = 4$

Integrating we get

$$v = \frac{dy}{dt} = \frac{ty^2}{18} \text{ or } \frac{dy}{y^2} = \frac{tdt}{18} \qquad -\frac{1}{y} = \frac{t^2}{36} + B$$

Where B is an integral constant.

$$\frac{1}{y} = 1 - \frac{t^2}{36} \qquad \frac{1}{y} = 1 - \frac{3^2}{36} = \frac{3}{4} \text{ or } y = \frac{4}{3}$$

$$w = \frac{dz}{dt} = \frac{z}{2t} \text{ or } \frac{2dz}{z} = \frac{dt}{t}$$

Substituting $y=1, t=0, B = -1$

At $t = 3$ s,

Integrating we get

$$2 \log_e z = \log_e t + C$$

Where C is an integral constant.

Substituting $z=0, t=0, C = 0$ $2 \log_e z = \log_e t$ or $z^2 = t$

At $t = 3$ s,

$$z^2 = 3 \text{ or } z = \sqrt{3}$$

From Eqs. 1, 2 and 3, at the end of 3 seconds the particle is at a point

$$\left(\sqrt{13}, \frac{4}{3}, \sqrt{3} \right)$$

Q.4. The following cases represent the two velocity components, determine the third component of velocity such that they satisfy the continuity equation:

(i) $u = x^2 + y^2 + z^2$; $v = xy^2 - yz^2 + xy$; (ii) $v = 2y^2$; $w = 2xyz$.

Solution:

The continuity equation for incompressible flow is given by

$$[(\partial u / \partial x) + (\partial v / \partial y) + (\partial w / \partial z)] = 0 \qquad \dots(01)$$

$$u = x^2 + y^2 + z^2; \quad (\partial u / \partial x) = 2x$$

$$v = xy^2 - yz^2 + xy; \quad (\partial v / \partial y) = 2xy - z^2 + x$$

Substituting in Eq. 1, we get

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

$$2x + 2xy - z^2 + z + (\partial w / \partial z) = 0$$

Rearranging and integrating the above expression, we get

$$w = (-3xz - 2xyz + z^3/3) + f(x,y)$$

Similarly, solution of the second problem

$$u = -4xy - x^2y^2 + f(y,z).$$

Q.5. Find the convective acceleration at the middle of a pipe which converges uniformly from 0.4 m to 0.2 m diameter over a length of 2 m. The rate of flow is 20 lps. If the rate of flow changes uniformly from 20 lps to 40 lps in 30 seconds, find the total acceleration at the middle of the pipe at 15th second.

Solution: $D_1 = 0.4 \text{ m}$, $D_2 = 0.2 \text{ m}$, $L = 2 \text{ m}$, $Q = 20 \text{ lps} = 0.02 \text{ m}^3/\text{s}$.

$$Q_1 = 0.02 \text{ m}^3/\text{s} \text{ and } Q_2 = 0.04 \text{ m}^3/\text{s}$$

Case (i): Flow is one dimensional and hence the velocity components $v = w = 0$

$$\therefore \text{Convective acceleration} = u \left(\frac{\partial u}{\partial x} \right)$$

$$A_1 = (\pi/4)(D_1^2) = 0.1257 \text{ m}^2$$

$$A_2 = (\pi/4)(D_2^2) = 0.0314 \text{ m}^2$$

$$u_1 = Q/A_1 = 0.02/0.1257 = 0.159 \text{ m/s}$$

and $u_2 = Q/A_2 = 0.02/0.0314 = 0.637 \text{ m/s}$

As the diameter changes uniformly, the velocity will also change uniformly. The velocity u at any distance x from inlet is given by

$$u = u_1 + (u_2 - u_1)(x/L) = 0.159 + 0.2388 x$$

$$\left(\frac{\partial u}{\partial x} \right) = 0.2388$$

$$\therefore \text{Convective acceleration} = u \left(\frac{\partial u}{\partial x} \right) = (0.159 + 0.2388 x) 0.2388$$


At A, $x = 1 \text{ m}$ and hence

$$(\text{Convective accln})_{x=1} = 94.99 \text{ mm/s}^2$$

Case (ii): Total acceleration = (convective + local) acceleration at $t = 15 \text{ seconds}$

Rate of flow $Q_{t=15} = Q_1 + (Q_2 - Q_1)(15/30) = 0.03 \text{ m}^3/\text{s}$.

$$u_1 = Q/A_1 = 0.03/0.1257 = 0.2386 \text{ m/s}$$

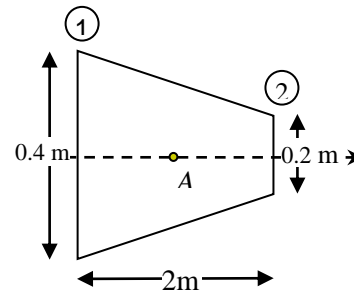

and $u_2 = Q/A_2 = 0.03/0.0314 = 0.9554 \text{ m/s}$

The velocity u at any distance x from inlet is given by

$$u = u_1 + (u_2 - u_1)/(x/L) = 0.2386 + 0.3584 x$$

$$(\partial u / \partial x) = 0.3584$$

$$\therefore \text{Convective acceleration} = u(\partial u / \partial x) = (0.2386 + 0.3584 x) 0.3584$$

At **A**, $x = 1 \text{ m}$ and hence

$$(\text{Convective accln})_{x=1} = 0.2139 \text{ m/s}^2$$

Local acceleration

$$\text{Diameter at A is given by } D = D_1 + (D_1 - D_2)/(x/L) = 0.3 \text{ m}$$

$$\text{and } A = (\pi/4)(D^2) = 0.0707 \text{ m}^2$$

$$\text{When } Q_1 = 0.02 \text{ m}^3/\text{s}, u_1 = 0.02/0.0707 = 0.2829 \text{ m/s}$$

$$\text{When } Q_2 = 0.04 \text{ m}^3/\text{s}, u_2 = 0.04/0.0707 = 0.5659 \text{ m/s}$$

$$\begin{aligned} \text{Rate of change of velocity} &= \text{Change in velocity/time} \\ &= (0.5629 - 0.2829)/0.3 = 9.43 \times 10^{-3} \text{ m/s}^2 \end{aligned}$$

$$\therefore \text{Total acceleration} = 0.2139 + 9.43 \times 10^{-3} = 0.2233 \text{ m/s}^2$$

Q.6. In a flow the velocity vector is given by $V = 3xi + 4yj - 7zk$. Determine the equation of the stream line passing through a point $M(1, 4, 5)$.

Ans: Given the Velocity vector $V = 3xi + 4yj - 7zk$

$$\Rightarrow u = 3x ; v = 4y ; w = -7z$$

To determine the equation of the stream line passing through a point $M(1, 4, 5)$

The 3-D equation of streamline is given by,

$$\begin{aligned} \frac{dx}{u} &= \frac{dy}{v} = \frac{dz}{w} \\ \frac{dx}{3x} &= \frac{dy}{4y} = \frac{dz}{-7z} \dots \text{Eq.1} \end{aligned}$$

The streamline equation at point **M(1, 4, 5)**, $x = 1, y = 4, z = 5$

Substituting the values of $x, y,$ and z in Eq.1

$$\frac{dx}{3} = \frac{dy}{16} = \frac{dz}{-35}$$

The equation of a streamline $ds = 3i + 16k - 35k$

Q.7. A 250 mm diameter pipe carries oil of specific gravity 0.9 at a velocity of 3 m/s. At another section the diameter is 200 mm. Find the velocity at this section and the mass rate of flow of oil.

Solution:

$$D_1 = 0.25 \text{ m}; \quad D_2 = 0.2 \text{ m}; \quad S_o = 0.9; \quad V_1 = 3 \text{ m/s}; \quad \rho = 1000 \text{ kg/m}^3 (\text{assumed});$$

$$V_2 = ?; \quad \text{Mass rate of flow} = ?$$

From discharge continuity equation for steady incompressible flow, we have

$$Q = A_1 V_1 = A_2 V_2 \tag{01}$$

$$A_1 = (\pi/4)D_1^2 = (\pi/4)0.25^2 = 0.0499 \text{ m}^2$$

$$A_2 = (\pi/4)D_2^2 = (\pi/4)0.20^2 = 0.0314 \text{ m}^2$$

Substituting in Eq. 1, we get

$$Q = 0.0499 \times 3 = 0.1473 \text{ m}^3/\text{s}$$

$$\text{Mass rate of flow} = \rho Q = 0.1479 \times 1000 = 147.9 \text{ kg/m}^3 (\text{Ans})$$

$$V_2 = (A_1 / A_2) \times V_1 = (D_1 / D_2)^2 \times V_1 = (0.25/0.2)^2 \times 3 = 4.6875 \text{ m/s} (\text{Ans})$$

Q.8. In a two dimensional incompressible flow the fluid velocity components are given by

$$u = x - 4y \quad \text{and} \quad v = -y - 4x$$

Where u and v are x and y -components of velocity of flow. Show that the flow satisfies the continuity equation and obtain the expression for stream function. If the flow is potential, obtain also the expression for the velocity potential.

Solution:

$$u = x - 4y \quad \text{and} \quad v = -y - 4x$$

$$(\partial u / \partial x) = 1 \quad \text{and} \quad (\partial v / \partial y) = -1$$

$$(\partial u / \partial x) + (\partial v / \partial y) = 1 - 1 = 0.$$

Hence it satisfies continuity equation and the flow is continuous and velocity potential exists.

Let ϕ be the velocity potential.

$$\text{Then } (\partial \phi / \partial x) = -u = -(x - 4y) = -x + 4y \tag{1}$$

$$\text{and } (\partial \phi / \partial y) = -v = -(-y - 4x) = y + 4x \tag{2}$$

Integrating Eq. 1, we get

$$\phi = (-x^2/2) + 4xy + C \tag{3}$$

Where C is an integral constant, which is independent of x and can be a function of y .

Differentiating Eq. 3 w.r.t. y , we get

$$(\partial \phi / \partial y) = 0 + 4x + (\partial C / \partial y) \Rightarrow y + 4x$$

Hence, we get $(\partial C / \partial y) = y$

Integrating the above expression, we get $C = y^2/2$

Substituting the value of C in Eq. 3, we get the general expression as

$$\phi = (-x^2/2) + 4xy + y^2/2$$

Stream Function

Let ψ be the velocity potential.

Then $(\partial \psi / \partial x) = v = (-y - 4x) = -y - 4x$ (4)

and $(\partial \psi / \partial y) = u = -(x - 4y) = -x + 4y$ (5)

Integrating Eq. 4, we get

$$\psi = -y x - 4(x^2/2) + K$$
 (6)

Where K is an integral constant, which is independent of x and can be a function of y .

Differentiating Eq. 6 w.r.t. y , we get

$$(\partial \psi / \partial y) = -x - 0 + (\partial K / \partial y) \Rightarrow -x + 4y$$

Hence, we get $(\partial K / \partial y) = 4y$

Integrating the above expression, we get $C = 4y^2/2 = 2y^2$

Substituting the value of K in Eq. 6, we get the general expression as

$$\psi = -y x - 2x^2 + 2y^2$$

Q.9. The components of velocity for a two dimensional flow are given by

$$u = x y; \quad v = x^2 - \frac{y^2}{2}$$

Check whether (i) they represent the possible case of flow and (ii) the flow is irrotational.

Solution:

$$u = x y; \quad \text{and} \quad v = x^2 - \frac{y^2}{2}$$

$$\begin{aligned}(\partial u / \partial x) &= y & (\partial v / \partial y) &= -y \\ (\partial u / \partial y) &= x & (\partial v / \partial x) &= 2x\end{aligned}$$

For a possible case of flow the velocity components should satisfy the equation of continuity.

i.e.
$$\left(\frac{\partial u}{\partial x}\right) + \left(\frac{\partial v}{\partial y}\right) = 0$$

Substituting, we get $y - y = 0$.

Hence it is a possible case of a fluid flow.

For flow to be irrotational in a two dimensional fluid flow, the rotational component in z direction (ω_z) must be zero, where

$$\omega_z = \frac{1}{2} \left[\left(\frac{\partial v}{\partial x} \right) - \left(\frac{\partial u}{\partial y} \right) \right] = \frac{1}{2} [2x - x] \neq 0$$

Hence, the flow is not irrotational.

Q.10. Find the components of velocity along x and y for the velocity potential $\phi = a \cos xy$.

Also calculate the corresponding stream function.

Solution:

$$\phi = a \cos xy.$$

$$\left(\frac{\partial \phi}{\partial x}\right) = -u = -ay \sin(xy) \quad (1)$$

and
$$\left(\frac{\partial \phi}{\partial y}\right) = -v = -ax \sin(xy) \quad (2)$$

Hence $u = ay \sin xy$ and $v = ax \sin xy$.

Q.11. The stream function and velocity potential for a flow are given by,

$$\psi = 2xy \quad \text{and} \quad \phi = x^2 - y^2$$

Show that the conditions for continuity and irrotational flow are satisfied

Solution:

From the properties of Stream function, the existence of stream function shows the possible case of flow and if it satisfies Laplace equation, then the flow is irrotational.

(i)
$$\psi = 2xy$$

$$\begin{aligned}
 (\partial \psi / \partial x) &= 2y & \text{and} & & (\partial \psi / \partial y) &= 2x \\
 (\partial^2 \psi / \partial x^2) &= 0 & \text{and} & & (\partial^2 \psi / \partial y^2) &= 0 \\
 (\partial^2 \psi / \partial x \partial y) &= 2 & \text{and} & & (\partial^2 \psi / \partial y \partial x) &= 2
 \end{aligned}$$

$$(\partial^2 \psi / \partial x \partial y) = (\partial^2 \psi / \partial y \partial x)$$

Hence the flow is Continuous.

$$(\partial^2 \psi / \partial x^2) + (\partial^2 \psi / \partial y^2) = 0$$

As it satisfies the Laplace equation, the flow is irrotational.

From the properties of Velocity potential, the existence of Velocity potential shows the flow is irrotational and if it satisfies Laplace equation, then it is a possible case of flow

$$(ii) \quad \phi = x^2 - y^2$$

$$\begin{aligned}
 (\partial \phi / \partial x) &= 2x & \text{and} & & (\partial \phi / \partial y) &= -2y \\
 (\partial^2 \phi / \partial x^2) &= 2 & \text{and} & & (\partial^2 \phi / \partial y^2) &= -2 \\
 (\partial^2 \phi / \partial x \partial y) &= 0 & \text{and} & & (\partial^2 \phi / \partial y \partial x) &= 0
 \end{aligned}$$

$$\frac{\partial^2 \phi}{\partial x \partial y} = \frac{\partial^2 \phi}{\partial y \partial x}$$

Hence the flow is irrotational

$$\frac{\partial^2 \phi}{\partial x^2} + \frac{\partial^2 \phi}{\partial y^2} = 0$$

As it satisfies the Laplace equation, the flow is Continuous.

Q.12. In a 2-D flow, the velocity components are $u = 4y$ and $v = -4x$

- i. Is the flow possible?
- ii. if so, determine the stream function
- iii. What is the pattern of stream lines?

Solution:

For a possible case of fluid flow, it has to satisfy continuity equation.

$$i.e. \quad \left(\frac{\partial u}{\partial x} \right) + \left(\frac{\partial v}{\partial y} \right) = 0 \quad (1)$$

$$u = 4y \quad \text{and} \quad v = -4x$$

$$(\partial u / \partial x) = 0 \quad (\partial v / \partial y) = 0$$

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

Substituting in Eq. 1, we get 0 .

Hence the flow is possible.

Stream function

We know that $(\partial \psi / \partial x) = v = -4x$ (2)

and $(\partial \psi / \partial y) = -u = -4y$ (3)

$$\psi = -2x^2 + C(y) \quad (4)$$

Where C is an integral constant and a function of y .

Differentiating Eq. 4, w.r.t. y , we get

$$(\partial \psi / \partial y) = 0 + \partial C(y) / \partial y = -u = -4y$$

Integrating the above expression w.r.t. y we get

$$C(y) = -2y^2.$$

Substituting the above value in Eq. 4, we get the general expression as

$$\psi = -2x^2 - 2y^2 = -2(x^2 + y^2)$$

The above equation is an expression of concentric circles and hence the stream function is concentric circles.

notes4free.in

Q.13. A stream function in a two dimensional flow is $\psi = 2xy$. Determine the corresponding velocity potential.

Solution:

Given $\psi = 2xy$.

$$u = -(\partial \psi / \partial x) = -(\partial \psi / \partial y) = -2y \quad (01)$$

$$v = (\partial \psi / \partial y) = (\partial \psi / \partial x) = 2x \quad (02)$$

Integrating Eq. 1, w.r.t. x , we get

$$\phi = 2x^2/2 + C = x^2 + C(y) \quad (03)$$

Where $C(y)$ is an integral constant independent of x

Differentiating Eq. 3 w.r.t. y , we get

$$(\partial \phi / \partial y) = 0 + (\partial C(y) / \partial y) = -2y$$

Integrating the above expression w.r.t. y , we get

$$C(y) = -y^2$$

Substituting for $C(y)$ in Eq. 3, we get the general expression for ϕ as

$$\phi = x^2 + C = x^2 - y^2 \quad (\text{Ans})$$

Q.14. The velocity potential for a flow is given by the function $\phi = x^2 - y^2$. Verify that the flow is incompressible.

Solution:

From the properties of velocity potential, we have that if ϕ satisfies Laplace equation, then the flow is steady incompressible continuous fluid flow.

Given

$$\phi = x^2 - y^2$$

$$(\partial \phi / \partial x) = 2x$$

$$(\partial \phi / \partial y) = -2y$$

$$(\partial^2 \phi / \partial x^2) = 2$$

$$(\partial^2 \phi / \partial y^2) = -2$$

From Laplace Equation, we have $(\partial^2 \phi / \partial x^2) + (\partial^2 \phi / \partial y^2) = 2 - 2 = 0$

Q.15. If for a two dimensional potential flow, the velocity potential is given by $\phi = x(2y-1)$. Determine the velocity at the point P (4, 5). Determine also the value of stream function ψ at the point 'P'.

Ans:

(i) The velocity at the point P (4, 5), $x=4$, $y=5$

$$\phi = x(2y-1)$$

$$\frac{\partial \phi}{\partial x} = -u = (2y-1), \quad u = (1-2y)$$

$$\frac{\partial \phi}{\partial y} = -v = x \times 2, \quad v = -2x$$

$$u \text{ at 'P'(4,5)} = -9 \text{ Units/s}$$

$$v(4,5) \text{ at 'P'} = -8 \text{ Units/s}$$

Velocity at P = $-9i-8j$, Velocity $\sqrt{(-9)^2 + (-8)^2} = 12.04 \text{ Units}$

(ii) Stream function $\psi_{P(4,5)}$

Given $\phi = x(2y-1)$

$$\frac{\partial \phi}{\partial x} = -u = (2y-1) = \frac{\partial \psi}{\partial y}$$

$$\frac{\partial \phi}{\partial y} = -v = x \times 2 = -\frac{\partial \psi}{\partial x}$$

$$\frac{\partial \psi}{\partial y} = -u = (2y-1) \dots \text{Eq.1}$$

$$\frac{\partial \psi}{\partial x} = u = -2x \dots \text{Eq.2}$$

Integrating Eq.1 with respect 'y' we get

$$\int d\psi = \psi = \frac{2 \times y^2}{2} - y + C(f(x)) \dots \text{Eq.3}$$

Differentiating Eq.3 with respect to 'x'

$$\frac{\partial \psi}{\partial x} = \frac{\partial C}{\partial x} \quad \text{from Eq.2} \quad \frac{\partial \psi}{\partial x} = -2x$$

$$\frac{\partial C}{\partial x} = -2x \quad \text{Integrating} \rightarrow C = -x^2$$

Substituting value of C in Eq.3

$$\psi = (y^2 - y - x^2)$$

notes4free.in

Q.16. A stream function is given by $\psi = 2x^2 - 2y^2$. Determine the velocity and velocity potential function at (1, 2)

Ans: Given: $\psi = 2x^2 - 2y^2$

$$\frac{\partial \psi}{\partial x} = 4x = -v; v = -4x \Rightarrow \text{Velocity at (1,2), } v = -4 \text{ Units}$$

$$\frac{\partial \psi}{\partial y} = -4y = u; u = -4y \Rightarrow \text{Velocity at (1,2), } u = -8 \text{ Units}$$

Resultant velocity $V_{(1,2)} = \sqrt{(-4)^2 + (-8)^2} = 8.94 \text{ Units}$

$$\frac{\partial \phi}{\partial x} = -u \Rightarrow \frac{\partial \phi}{\partial x} = -(-4y) = 4y \Rightarrow \phi = 4 \times x \times y + C(f(y) \text{ only}) \dots \text{eq1}$$

$$\frac{\partial \phi}{\partial y} = -v \Rightarrow \frac{\partial \phi}{\partial y} = -(-4x) = 4x \Rightarrow \phi = 4 \times x \times y + C(f(x) \text{ only}) \dots \text{eq2}$$

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

$$\frac{\partial \phi}{\partial y} = (4x + \frac{\partial C}{\partial y}) \Rightarrow \frac{\partial C}{\partial y} = 4x - \frac{\partial \phi}{\partial y} \Rightarrow \frac{\partial C}{\partial y} = 4x - \left(\frac{\partial \psi}{\partial x} \right) \Rightarrow \frac{\partial C}{\partial y} = 4x - 4x = 0$$

From Eq.1

$$\frac{\partial C}{\partial y} = 0 \text{ Integrating } C = 0$$

$$\therefore \phi = 4 \times x \times y \quad \Rightarrow \phi = 4 \times 1 \times 2 = 8 \text{ Units}$$

Q.17. The velocity potential ϕ for a two dimensional flow is given by $(x^2 - y^2) + 3xy$. Calculate:
 (i) the stream function ψ and (ii) the flow rate passing between the stream lines through (1, 1) and (1, 2).

Ans: Given $\phi = (x^2 - y^2) + 3xy$

(i) To determine the ψ function

$$d\psi = \frac{\partial \psi}{\partial x} dx + \frac{\partial \psi}{\partial y} dy \dots \text{Eq. (1)}$$

$$d\psi = -v dx + u dy \dots \text{Eq. (2)}$$

As per definition of velocity potential (ϕ) and stream function (ψ);

$$\frac{\partial \phi}{\partial x} = \frac{\partial \psi}{\partial y} = u \quad \text{and} \quad \frac{\partial \phi}{\partial y} = -\frac{\partial \psi}{\partial x} = v$$

$$u = \frac{\partial \phi}{\partial x} = (2x + 3y) = \frac{\partial \psi}{\partial y} \quad \text{and} \quad \frac{\partial \phi}{\partial y} = (-2y + 3x) = \left(-\frac{\partial \psi}{\partial x} \right) = v$$

Substituting the value of u and v in terms of x and y in equation 2, we obtain

$$d\psi = -v dx + u dy = -(-2y + 3x)dx + (2x + 3y)dy$$

$$d\psi = (2y + 3x)dx + (2x + 3y)dy \dots \text{Eq. 3}$$

Integrating the equation-3 (partially w.r.t 'x' the 'dx-term' and w.r.t 'y' the 'dy-term')

$$\psi = \left(2xy + \frac{3}{2}x^2 \right) + \left(2xy + \frac{3}{2}y^2 \right) = 4xy + \frac{3}{2}(x^2 + y^2)$$

$$\boxed{\psi = 4xy + \frac{3}{2}(x^2 + y^2)}$$

(ii) The flow rate passing between the stream lines through (1, 1) and (1, 2).

The equation of stream function is given by $\psi = 4xy + \frac{3}{2}(x^2 + y^2)$

The value of Point streamline at (1, 1) is obtained by substituting $x = 1, y = 1$

$$\psi_{(1,1)} = 4xy + \frac{3}{2}(x^2 + y^2) = 4 \times 1 \times 1 + \frac{3}{2}(1^2 + 1^2) = 7 \text{ Units}$$

The value of Point streamline at (1, 2) is obtained by substituting $x = 1, y = 2$

$$\psi_{(1,2)} = 4xy + \frac{3}{2}(x^2 + y^2) = 4 \times 1 \times 2 + \frac{3}{2}(1^2 + 2^2) = 15.5 \text{ Units}$$

The flow rate passing between the stream lines through (1, 1) and (1, 2)

$$q = \psi_{(1,2)} - \psi_{(1,1)} = (15.5 - 7)$$

$$q = 8.5 \text{ m}^2/\text{s}/\text{unit width}$$

Q.18. The velocity components in a 2-dimensional incompressible flow field are expressed as

$$u = \left(\frac{y^3}{3} + 2x - x^2 \times y \right), \quad v = \left(x \times y^2 - 2y - \frac{x^3}{3} \right)$$

Is the flow irrotational? If so determine the corresponding stream function.

Ans: Given the components of velocity

$$u = \left(\frac{y^3}{3} + 2x - x^2 \times y \right), \quad v = \left(x \times y^2 - 2y - \frac{x^3}{3} \right)$$

The condition for Irrorational flow

$$\left(\frac{\partial v}{\partial x} \right) = \left(\frac{\partial u}{\partial y} \right)$$

$$LHS \quad \frac{\partial v}{\partial x} = \frac{\partial}{\partial x} \left(x \times y^2 - 2y - \frac{x^3}{3} \right) \text{ and } RHS \quad \frac{\partial u}{\partial y} = \frac{\partial}{\partial y} \left(\frac{y^3}{3} + 2x - x^2 \times y \right)$$

i.e. LHS = $(y^2 - x^2)$ and RHS = $(y^2 - x^2)$

Hence the flow is Irrational

The corresponding stream function 'ψ' can be obtained by using following relationship

$$\frac{\partial \psi}{\partial x} = v = \left(x \times y^2 - 2y - \frac{x^3}{3} \right) \dots Eq.1$$

$$\frac{\partial \psi}{\partial y} = -u = - \left(\frac{y^3}{3} + 2x - x^2 \times y \right) \dots Eq.2$$

Integrating Eq.1 with respect to 'x'

$$\psi = \frac{x^2 \times y^2}{2} - 2xy - \frac{x^4}{12} + C_1(f(y)) \dots Eq.3$$

Differentiating Eq.3 with respect to 'y'

$$\frac{\partial \psi}{\partial y} = x^2 \times y - 2x + \frac{\partial C_1}{\partial y}$$

$$\frac{\partial C_1}{\partial y} = -\frac{y^3}{3}$$

$$\text{Integrating, } C_1 = -\frac{y^4}{12} + C; \quad (\text{assu min } g \ C = 0)$$

$$C_1 = -\frac{y^4}{12}$$

The stream function 'ψ' is given by

$$\psi = \frac{x^2 \times y^2}{2} - 2 \times x \times y - \frac{x^4}{12} + -\frac{y^4}{12}$$

notes4free.in

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

MODULE-3

notes4free.in

FLUID DYNAMICS

Forces acting on the fluids

Following are the forces acting on the fluids

1. Self-Weight/ Gravity Force, F_g
2. Pressure Forces, F_p
3. Viscous Force, F_v
4. Turbulent Force, F_t
5. Surface Tension Force, F_s
6. Compressibility Force, F_c

Dynamics of fluid is governed by Newton's Second law of motion, which states that the resultant force on any fluid element must be equal to the product of the mass and the acceleration of the element.

$$\sum F = Ma$$

or

$$\sum F = F_g + F_p + F_v + F_s + F_c \quad (1)$$

Surface tension forces and Compressibility forces are not significant and may be neglected. Hence (1) becomes

$$\sum F = F_g + F_p + F_v + F_t$$

- Reynold's Equation of motion and used in the analysis of Turbulent flows. For laminar flows, turbulent force becomes less significant and hence (1) becomes

$$\sum F = F_g + F_p + F_v$$


- Navier - Stokes Equation. If viscous forces are neglected then the (1) reduces to

$$\sum F = F_g + F_p = M \times a$$

- Euler's Equation of motion.

Euler equation of motion

Consider a stream line in a flowing fluid in S direction as shown in the figure. On this stream line consider a cylindrical element having a cross sectional area dA and length ds .

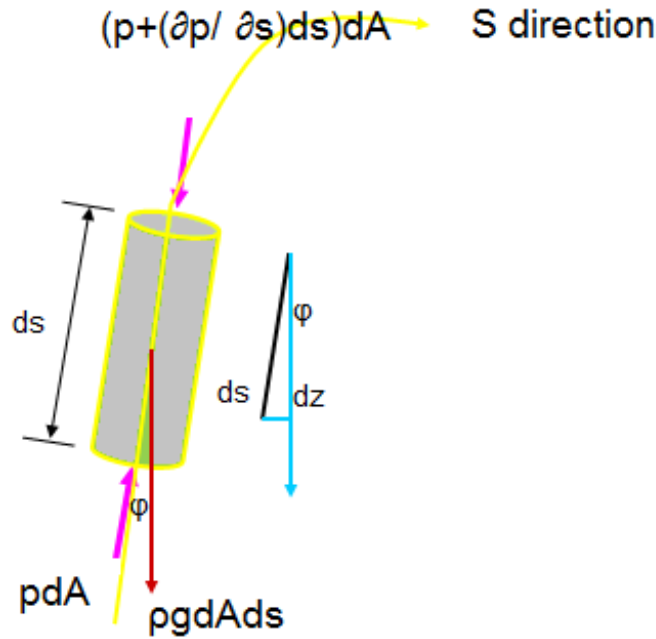

eq.png

Fluid element in stream line

Forces acting on the fluid element are:

- Pressure force, $p dA$ in the direction of flow
- Pressure force $(p + (\partial p / \partial s) ds) dA$ in the direction opposite to the flow direction
- Weight of element $\rho dA ds$ acting vertically downwards

Let ϕ be the angle between the direction of flow and the line of action of the weight of the element. The resultant force on the fluid element in the direction of s must be equal to mass of fluid element \times acceleration in direction s (according to Newton's second law of motion)

$$p dA - (p dA + (\partial p / \partial s) ds) dA - \rho g dA ds \cos \phi = \rho dA ds a_s \tag{a}$$

where a_s is the acceleration in direction of s now

$$a_s = \frac{dv}{dt}$$

where v is function of s and t

$$\begin{aligned} &= \frac{\partial v}{\partial s} \frac{ds}{dt} + \frac{\partial v}{\partial t} \\ &= v \frac{\partial v}{\partial s} + \frac{\partial v}{\partial t} \end{aligned}$$

since

$$\frac{ds}{dt} = v$$

If the flow is steady,

$$\frac{\partial v}{\partial t} = 0$$

hence,

$$a_s = v \frac{\partial v}{\partial s}$$

Substituting the value of a_s in equation (a) and simplifying,

$$-\frac{\partial p}{\partial s} ds dA - \rho g ds dA \cos \phi = \rho v ds \times v \frac{\partial v}{\partial s}$$

Dividing the whole equation by $\rho ds dA$,

$$\begin{aligned} -\frac{\partial p}{\rho \partial s} - g \cos \phi &= v \frac{\partial v}{\partial s} \\ \Rightarrow \frac{\partial p}{\rho \partial s} + g \cos \phi + v \frac{\partial v}{\partial s} &= 0 \end{aligned}$$

But from the figure we have

$$\cos \phi = \frac{dz}{ds}$$

Hence,

$$\frac{1}{\rho} \frac{\partial p}{\partial s} + g \frac{dz}{ds} + v \frac{\partial v}{\partial s} = 0$$

or

$$\frac{\partial p}{\rho} + g dz + v dv = 0 \tag{b}$$

Equation (b) is known as Euler's equation of motion.

Bernoulli's Equation of motion from Euler's equation

Statement: *In a steady, incompressible fluid, the total energy remains same along a streamline throughout the reach.*

Bernoulli's equation may be obtained by integrating Euler's equation of motion i.e, equation (b) as

$$\int \frac{dp}{\rho} + \int g dz + \int v dv = \text{constant}$$

If the flow is in-compressible, ρ is constant and hence,

$$\begin{aligned} \frac{p}{\rho} + gz + \frac{v^2}{2} &= \text{constant} \\ \Rightarrow \frac{p}{\rho g} + \frac{v^2}{2g} + z &= \text{constant} \end{aligned} \tag{c}$$

Equation (c) is called as Bernoulli's equation, Where

$\frac{p}{\rho}$ = pressure energy per unit weight of the fluid or also called as pressure head

$\frac{v^2}{2g}$ = kinetic energy per unit weight of the fluid or kinetic head

z = potential energy per unit weight or potential head

Assumption made in deriving the Bernoulli's Equation

Following assumptions were made to derive the Bernoulli's equation

- The flow is steady
- The flow is ideal (Viscosity of the fluid is zero)
- The flow is in-compressible
- The flow is irrotational

Limitations on the use of the Bernoulli Equation

- **Steady flow:** The first limitation on the Bernoulli equation is that it is applicable to steady flow.
- **Friction-less flow:** Every flow involves some friction, no matter how small, and frictional effects may or may not be negligible.
- **In-compressible flow:** One of the assumptions used in the derivation of the Bernoulli equation is that $\rho = \text{constant}$ and thus the flow is in-compressible. Strictly speaking, the Bernoulli equation is applicable along a streamline, and the value of the constant C , in general, is different for different streamlines. But when a region of the flow is irrotational, and thus there is no vorticity in the flow field, the value of the constant C remains the same for all streamlines, and, therefore, the Bernoulli equation becomes applicable across streamlines as well.

Kinetic Energy correction factor

In deriving the Bernoulli's Equation, the velocity head or the kinetic energy per unit weight of the fluid has been computed based on the assumption that the velocity is uniform over the entire cross section of the stream tube. But in real fluids, the velocity distribution is not uniform. Therefore, to obtain the kinetic energy possessed by the fluid at differently sections is obtained by integrating the kinetic energies possessed by different fluid particles.

It is more convenient to express the kinetic energy in terms of the mean velocity of flow. But the actual kinetic energy is greater than the computed using the mean velocity. Hence a correction factor called 'Kinetic Energy correction factor, α ' is introduced.

$$\frac{p_1}{\rho} + \alpha_1 \left(\frac{v_1^2}{2g} \right) + z_1 = \frac{p_2}{\rho} + \alpha_2 \left(\frac{v_2^2}{2g} \right) + z_2 + h_L = \text{Constant}$$

In most of the problems of turbulent flow, the value of $\alpha=1$.

Rotary or Vortex Motion

A mass of fluid in rotation about a fixed axis is called vortex. The rotary motion of fluid is also called vortex motion. In this case the rotating fluid particles have velocity in tangential direction. Thus the vortex motion is defined as motion in which the whole fluid mass rotates about an axis. The vortex motion is of two types:

1. Free vortex
2. Forced vortex

Free vortex flow

Free vortex flow is that type of flow in which the fluid mass rotates without any external applied contact force. The whole mass rotates either due to fluid pressure itself or the gravity or due to rotation previously imparted. Energy is not expended to any outside source. The free vortex motion is also called Potential vortex or Ir-rotational vortex.

Relationship between velocity and radius in free vortex

It is obtained by putting the value of external torque equal to **Zero** or on other words the time rate of change of angular momentum, i.e., moment of the momentum must be Zero. Consider a fluid particle of mass 'M' at a radial distance 'r' from the axis of rotation, having a tangential velocity 'u'. Then,

$$\text{Angular momentum} = \text{Mass} \times \text{velocity}$$

$$\text{Moment of the Momentum} = \text{Momentum} \times \text{radius} = mur$$

$$\text{Time rate of change of angular momentum} = \frac{\partial(mur)}{\partial t}$$

But for free vortex,

$$\frac{\partial(mur)}{\partial t} = 0$$

Integrating, we get

$$\int \frac{\partial(mur)}{\partial t} = 0 \Rightarrow Mur = \text{Constant} = ur = \text{constant}$$

Forced vortex flow

Forced vortex motion is one in which the fluid mass is made to rotate by means of some external agencies. The external agency is generally the mechanical power which imparts the constant torque on the fluid mass. The forced vortex motion is also called flywheel vortex or rotational vortex. The fluid mass in this forced vortex flow rotates at constant angular velocity ω . The tangential velocity of any fluid particle is given by,

$$u = \omega \times r$$

Fluid Mechanics

where 'r' is the radius of the fluid particle from the axis of rotation. Hence angular velocity ω is given by,

$$\omega = \frac{u}{r} = \text{constant}$$

Variation of pressure of a rotating fluid in any plane is given by,

$$dp = \rho \left(\frac{\omega^2 r^2}{r} \right) dr - \rho g dz$$

Integrating the above equation for points 1 and 2, we get

$$\begin{aligned} \int_1^2 dp &= \int_1^2 \rho \left(\frac{\omega^2 r^2}{r} \right) dr - \int_1^2 \rho g dz \\ \Rightarrow (p_2 - p_1) &= \left[\rho \omega^2 \frac{r^2}{2} \right]_1^2 - \rho g [z]_1^2 \\ \Rightarrow &= \frac{\rho}{2} [u_2^2 - u_1^2] - \rho g [z_2 - z_1] \end{aligned}$$

if the point 1 and 2 lies on free surface of the liquid, then $p_1 = p_2$ and hence above equation reduces to

$$[z_2 - z_1] = \frac{1}{2g} [v_2^2 - v_1^2]$$


If the point 1 lies on the axis of rotation, then $v_1 = \omega \times r_1 = \omega \times 0 = 0$, hence above equation reduces to,

$$z_2 - z_1 = \frac{u_2^2}{2g} = \frac{\omega^2 r_2^2}{2g}$$

APPLICATIONS OF BERNOULLI'S EQUATION

Venturi Meter

Venturimeter is a device for measuring discharge in a pipe.

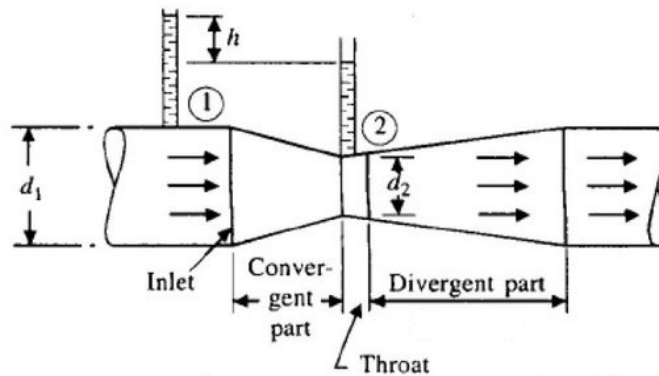

Schematic diagram of Venturi meter

A Venturi meter consists of:

1. Inlet/ Convergent cone
2. Throat
3. Outlet/ Divergent cone

The inlet section Venturi meter is same diameter as that type of the pipe to which it is connected, followed by the short convergent section with a converging cone angle of $21 \pm 1^\circ$ and its length parallel to the axis is approximately equal to $2.7(D-d)$, where 'D' is the pipe diameter and 'd' is the throat diameter.


The cylindrical throat is a section of constant cross-section with its length equal to diameter. The flow is minimum at the throat. Usually, diameter of throat is $\frac{1}{2}$ the pipe diameter.

A long diverging section with a cone angle of about $5-7^\circ$ where in the fluid is retarded and a large portion of the kinetic energy is converted back into the pressure energy.

Principle of Venturi Meter:

The basic principle on which a Venturi meter works is that by reducing the cross-sectional area of the flow passage, a pressure difference is created between the two sections, this pressure difference enables the estimation of the flow rate through the pipe.

Expression for Discharge through Venturi meter

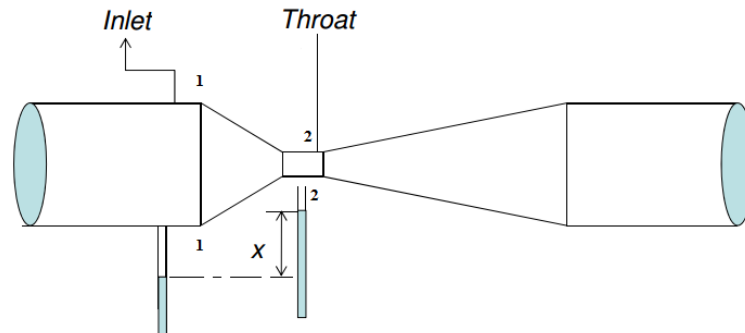

Let, d_1 =diameter at section 1-1

p_1 = pressure at section at 1-1

v_1 = velocity at section at 1-1

a_1 = area of cross-section at 1-1

d_2, p_2, v_2, a_2 be corresponding values at section 2-2.

Applying Bernoulli equation between 1-1 and 2-2 we have,

$$\frac{p_1}{\rho g} + \frac{v_1^2}{2g} + z_1 = \frac{p_2}{\rho g} + \frac{v_2^2}{2g} + z_2$$

Since pipe is horizontal, $z_1=z_2$,

Hence,

$$\begin{aligned} \frac{p_1}{\rho g} + \frac{v_1^2}{2g} &= \frac{p_2}{\rho g} + \frac{v_2^2}{2g} \\ \Rightarrow \frac{p_1 - p_2}{\rho g} &= \frac{v_2^2 - v_1^2}{2g} \\ \Rightarrow h &= \frac{v_2^2 - v_1^2}{2g} \end{aligned}$$

where $h = \frac{p_1 - p_2}{\rho g}$, is the pressure difference between section 1-1 and 2-2.

from continuity equation, we have

$$\begin{aligned} a_1 v_1 &= a_2 v_2 \\ \Rightarrow v_1 &= \frac{a_2 v_2}{a_1} \end{aligned}$$

Hence

$$\begin{aligned} h &= \frac{v_2^2}{2g} \left[\frac{a_2^2 - a_1^2}{a_1^2} \right] \\ \Rightarrow v_2 &= \frac{a_1}{\sqrt{a_1^2 - a_2^2}} \sqrt{2gh} \end{aligned} \quad (1)$$

substituting the value of v_2 in equation $Q = a_2 v_2$ we have,

$$Q_{th} = \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \sqrt{2gh}$$

Above equations is for ideal fluids and is called as the theoretical discharge equation of a venturi meter. For real fluids the equation changes to,

$$Q_{act} = C_d \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \sqrt{2gh}$$

Expression for 'h' given by the differential manometer

- **Case 1:** when liquid in the manometer is heavier than the liquid flowing through the pipe.

$$h = x \left[\frac{S_H}{S_O} - 1 \right]$$

where: S_H is the specific gravity of heavier liquid

S_O is the specific gravity of liquid flowing through pipe.

x difference in liquid columns in U-tube.

- **Case 2:** when liquid in the manometer is lighter than the liquid flowing through the pipe.

$$h = x \left[1 - \frac{S_L}{S_O} \right]$$

where: S_L is the specific gravity of heavier liquid

S_O is the specific gravity of liquid flowing through pipe.

x difference in liquid columns in U-tube.

Orifice Meter

Orifice

An orifice is a small aperture through which the fluid passes. The thickness of an orifice in the direction of flow is very small in comparison to its other dimensions.


If a tank containing a liquid has a hole made on the side or base through which liquid flows, then such a hole may be termed as an orifice. The rate of flow of the liquid through such an orifice at a given time will depend partly on the shape, size and form of the orifice.

An orifice usually has a sharp edge so that there is minimum contact with the fluid and consequently minimum frictional resistance at the sides of the orifice. If a sharp edge is not provided, the flow depends on the thickness of the orifice and the roughness of its boundary surface too.

Orifice Meter

- It is a device used for measuring the rate of flow through a pipe.
- It is a cheaper device as compared to venturi meter. The basic principle on which the Orifice meter works is same as that of Venturi meter.
- It consists of a circular plate with a circular opening at the center. This circular opening is called an Orifice.
- The diameter of the orifice is generally varies from 0.4 to 0.8 times the pipe diameter.

Expression for Discharge through Orifice meter

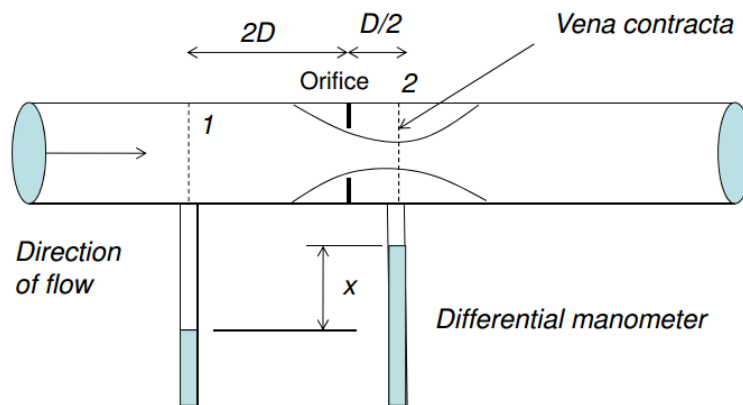

Let, d_1 =diameter at section 1-1

p_1 = pressure at section at 1-1

v_1 = velocity at section at 1-1

a_1 = area of cross-section at 1-1

d_2, p_2, v_2, a_2 be corresponding values at section 2-2.

Applying Bernoulli equation between 1-1 and 2-2 we have,

$$\frac{p_1}{\rho g} + \frac{v_1^2}{2g} + z_1 = \frac{p_2}{\rho g} + \frac{v_2^2}{2g} + z_2$$

Fluid Mechanics

Since pipe is horizontal, $z_1=z_2$,

Hence,

$$\frac{p_1}{\rho g} + \frac{v_1^2}{2g} = \frac{p_2}{\rho g} + \frac{v_2^2}{2g}$$
$$\Rightarrow \frac{p_1 - p_2}{\rho g} = \frac{v_2^2 - v_1^2}{2g}$$

or

$$h = \frac{v_2^2 - v_1^2}{2g}$$

or

$$2gh = v_2^2 - v_1^2$$

$$v_2 = \sqrt{2gh + v_1^2} \quad (i)$$

Now section (2) is at the vena-contracta and a_2 represents the area at the vena-contracta.

If the area a_o is the area of the orifice, then we have

$$a_2 = C_c \frac{a_o}{a_1}$$

where C_c is the co-efficient of contraction.

\therefore

$$a_2 = a_o \times C_c$$

From continuity equation, we have

$$a_1 v_1 = a_2 v_2 \quad \text{or} \quad (ii)$$

$$v_1 = \frac{a_2 v_2}{a_1} = \frac{a_o C_c}{a_1} v_2 \quad (ii)$$

Substituting the value of v_1 in equation (i), we get

$$v_2 = \sqrt{2gh + \frac{a_o^2 C_c^2 v_2^2}{a_1^2}}$$
$$\Rightarrow v_2 = \frac{\sqrt{2gh}}{\sqrt{1 - \left(\frac{a_o}{a_1}\right)^2 C_c^2}}$$

substituting the value of v_2 in equation $Q = a_2 v_2$ we have,

$$Q = \frac{a_o C_c \sqrt{2gh}}{\sqrt{1 - \left(\frac{a_o}{a_1}\right)^2 C_c^2}} \quad (iv)$$

Above equation can be simplified by using

$$C_c = C_d \frac{\sqrt{1 - \left(\frac{a_o}{a_1}\right)^2}}{\sqrt{1 - \left(\frac{a_o}{a_1}\right)^2 C_c^2}}$$

or

$$C_d = C_c \frac{\sqrt{1 - \left(\frac{a_o}{a_1}\right)^2 C_c^2}}{\sqrt{1 - \left(\frac{a_o}{a_1}\right)^2}}$$

Substituting the this value of C_c in(iv),

$$Q_{act} = a_o \times C_d \frac{\sqrt{1 - \left(\frac{a_o}{a_1}\right)^2 C_c^2}}{\sqrt{1 - \left(\frac{a_o}{a_1}\right)^2}} \times \frac{\sqrt{2gh}}{\sqrt{1 - \left(\frac{a_o^2}{a_1^2}\right) C_c^2}}$$

or


$$Q_{act} = \frac{C_d a_o a_1 \sqrt{2gh}}{\sqrt{a_1^2 - a_o^2}}$$

where C_d is the co-efficient of discharge for orifice meter.

Pitot tube

Pitot tube is a device used to measure the velocity of flow at any point in a pipe or a channel.

Principle: If the velocity at any point decreases, the pressure at that point increases due to the conversion of the Kinetic energy into pressure energy. In Simplest form, the pitot tube consists of a glass tube, bent at right angles.

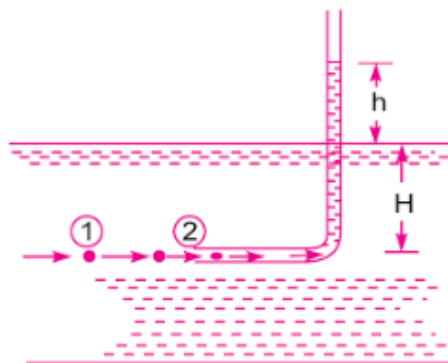

Let, p_1 = pressure at section at 1-1

v_1 = velocity at section at 1-1

p_2 = pressure at section at 1-1

v_2 = velocity at section at 1-1

H = depth of tube in the liquid

h = rise of liquid in the tube above free surface

Fluid Mechanics

Applying Bernoulli equation between 1-1 and 2-2 we have,

$$\frac{p_1}{\rho g} + \frac{v_1^2}{2g} + z_1 = \frac{p_2}{\rho g} + \frac{v_2^2}{2g} + z_2$$

But $z_1 = z_2$ as points (1) and (2) are on the same line and $v_2 = 0$

$\frac{p_1}{\rho g}$ = pressure head at (1) = H

$\frac{p_2}{\rho g}$ = pressure head at (2) = (h+H)

Substituting these values we get,

$$H + \frac{v_1^2}{2g} = (h+H) \therefore h = \frac{v_1^2}{2g} \quad \text{or} \quad v_1 = \sqrt{2gh}$$

this is the theoretical velocity. Actual velocity is given by

$$(v_1)_{act} = C_v \sqrt{2gh}$$

there fore velocity at any point is,

$$v_{act} = C_v \sqrt{2gh}$$

notes4free.in

P1. An oil of sp.gr. 0.8 is flowing through a venturimeter having inlet diameter 20cm and throat 10cm. The oil mercury differential manometer shows a reading of 25cm. Calculate the discharge of oil through the horizontal venturimeter. Take $C_d = 0.98$.

Solution. Given :

Sp. gr. of oil, $S_o = 0.8$

Sp. gr. of mercury, $S_h = 13.6$

Reading of differential manometer, $x = 25$ cm

$$\begin{aligned} \therefore \text{Difference of pressure head, } h &= x \left[\frac{S_h}{S_o} - 1 \right] \\ &= 25 \left[\frac{13.6}{0.8} - 1 \right] \text{ cm of oil} = 25 [17 - 1] = 400 \text{ cm of oil} \end{aligned}$$

Dia. at inlet, $d_1 = 20$ cm

$$\therefore a_1 = \frac{\pi}{4} d_1^2 = \frac{\pi}{4} \times 20^2 = 314.16 \text{ cm}^2$$

$d_2 = 10$ cm

$$\therefore a_2 = \frac{\pi}{4} \times 10^2 = 78.54 \text{ cm}^2$$

$C_d = 0.98$

\therefore The discharge Q is given by equation (6.8)

$$\begin{aligned} \text{or } Q &= C_d \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \times \sqrt{2gh} \\ &= 0.98 \times \frac{314.16 \times 78.54}{\sqrt{(314.16)^2 - (78.54)^2}} \times \sqrt{2 \times 981 \times 400} \\ &= \frac{21421375.68}{\sqrt{98696 - 6168}} = \frac{21421375.68}{304} \text{ cm}^3/\text{s} \end{aligned}$$

P2. A horizontal venturimeter with inlet diameter 30cm and throat diameter 15cm is used to measure the flow of water. The differential manometer connected to the inlet and throat is 20cm. Calculate the discharge. Take $C_d = 0.98$.

Solution. Given :

Dia. at inlet, $d_1 = 30 \text{ cm}$

\therefore Area at inlet, $a_1 = \frac{\pi}{4} d_1^2 = \frac{\pi}{4} (30)^2 = 706.85 \text{ cm}^2$

Dia. at throat, $d_2 = 15 \text{ cm}$

\therefore $a_2 = \frac{\pi}{4} \times 15^2 = 176.7 \text{ cm}^2$

$C_d = 0.98$

Reading of differential manometer = $x = 20 \text{ cm}$ of mercury.

\therefore Difference of pressure head is given by (6.9)

or
$$h = x \left[\frac{S_h}{S_o} - 1 \right]$$

where $S_h = \text{Sp. gravity of mercury} = 13.6$, $S_o = \text{Sp. gravity of water} = 1$

$= 20 \left[\frac{13.6}{1} - 1 \right] = 20 \times 12.6 \text{ cm} = 252.0 \text{ cm}$ of water.

The discharge through venturimeter is given by eqn. (6.8)

$$Q = C_d \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \times \sqrt{2gh}$$

$$= 0.98 \times \frac{706.85 \times 176.7}{\sqrt{(706.85)^2 - (176.7)^2}} \times \sqrt{2 \times 9.81 \times 252}$$

$$= \frac{86067593.36}{\sqrt{499636.9 - 31222.9}} = \frac{86067593.36}{684.4}$$

$$= 125756 \text{ cm}^3/\text{s} = \frac{125756}{1000} \text{ lit/s} = \mathbf{125.756 \text{ lit/s. Ans.}}$$

P3.A horizontal venturimeter with inlet diameter 20cm and throat diameter 10 cm is used to measure the flow of oil of specific gravity 0.8. The discharge of oil through venturimeter is 60li/s. Find the reading of the oil-mercury manometer. Take Cd= 0.98

Solution. Given : $d_1 = 20 \text{ cm}$
 $\therefore a_1 = \frac{\pi}{4} 20^2 = 314.16 \text{ cm}^2$
 $d_2 = 10 \text{ cm}$
 $\therefore a_2 = \frac{\pi}{4} \times 10^2 = 78.54 \text{ cm}^2$
 $C_d = 0.98$
 $Q = 60 \text{ litres/s} = 60 \times 1000 \text{ cm}^3/\text{s}$

Using the equation (6.8), $Q = C_d \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \times \sqrt{2gh}$

or $60 \times 1000 = 9.81 \times \frac{314.16 \times 78.54}{\sqrt{(314.16)^2 - (78.54)^2}} \times \sqrt{2 \times 981 \times h} = \frac{1071068.78\sqrt{h}}{304}$

or $\sqrt{h} = \frac{304 \times 60000}{1071068.78} = 17.029$

$\therefore h = (17.029)^2 = 289.98 \text{ cm of oil}$

But $h = x \left[\frac{S_h}{S_o} - 1 \right]$

where $S_h = \text{Sp. gr. of mercury} = 13.6$

$S_o = \text{Sp. gr. of oil} = 0.8$

$x = \text{Reading of manometer}$

$\therefore 289.98 = x \left[\frac{13.6}{0.8} - 1 \right] = 16x$

$\therefore x = \frac{289.98}{16} = 18.12 \text{ cm.}$

\therefore Reading of oil-mercury differential manometer = 18.12 cm. Ans.

P4. A horizontal venturimeter with inlet diameter 20cm and throat diameter 10cm is used to measure the flow of water. The pressure at inlet is 17.658N/cm² and vacuum pressure at throat is 30cm of Mercury. Find the discharge of water through venturimeter. Take Cd

= 0.98.

Solution. Given :

Dia. at inlet, $d_1 = 20 \text{ cm}$

$\therefore a_1 = \frac{\pi}{4} \times (20)^2 = 314.16 \text{ cm}^2$

Dia. at throat, $d_2 = 10 \text{ cm}$

$\therefore a_2 = \frac{\pi}{4} \times 10^2 = 78.74 \text{ cm}^2$

$p_1 = 17.658 \text{ N/cm}^2 = 17.658 \times 10^4 \text{ N/m}^2$

ρ for water $= 1000 \frac{\text{kg}}{\text{m}^3}$ and $\therefore \frac{p_1}{\rho g} = \frac{17.658 \times 10^4}{9.81 \times 1000} = 18 \text{ m of water}$

$\frac{p_2}{\rho g} = -30 \text{ cm of mercury}$
 $= -0.30 \text{ m of mercury} = -0.30 \times 13.6 = -4.08 \text{ m of water}$

\therefore Differential head $= h = \frac{p_1}{\rho g} - \frac{p_2}{\rho g} = 18 - (-4.08)$
 $= 18 + 4.08 = 22.08 \text{ m of water} = 2208 \text{ cm of water}$

The discharge Q is given by equation (6.8)

$$Q = C_d \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \times \sqrt{2gh}$$

$$= 0.98 \times \frac{314.16 \times 78.54}{\sqrt{(314.16)^2 - (78.74)^2}} \times \sqrt{2 \times 981 \times 2208}$$

$$= \frac{50328837.21}{304} \times 165555 \text{ cm}^3/\text{s} = 165.555 \text{ lit/s. Ans.}$$

P5. The inlet and throat diameters of a horizontal venturimeter are 30cm and 10cm respectively. The liquid flowing through the venturimeter is water. The pressure intensity at inlet is 13.734N/cm² while the vacuum pressure head at the throat is 37 cm of mercury. Find the rate of flow. Assume that 4% of the differential head is lost between the inlet and the throat. Find also the values of C_d for the Venturimeter.

Dia. at inlet, $d_1 = 30 \text{ cm}$

$\therefore a_1 = \frac{\pi}{4} (30)^2 = 706.85 \text{ cm}^2$

Dia. at throat, $d_2 = 10 \text{ cm}$

$\therefore a_2 = \frac{\pi}{4} (10)^2 = 78.54 \text{ cm}^2$

Pressure, $p_1 = 13.734 \text{ N/cm}^2 = 13.734 \times 10^4 \text{ N/m}^2$

\therefore Pressure head, $\frac{p_1}{\rho g} = \frac{13.734 \times 10^4}{1000 \times 9.81} = 14 \text{ m of water}$

$\frac{p_2}{\rho g} = -37 \text{ cm of mercury}$

$= \frac{-37 \times 13.6}{100} \text{ m of water} = -5.032 \text{ m of water}$

Differential head, $h = p_1/\rho g - p_2/\rho g$

$= 14.0 - (-5.032) = 14.0 + 5.032$

$= 19.032 \text{ m of water} = 1903.2 \text{ cm}$

Head lost, $h_f = 4\% \text{ of } h = \frac{4}{100} \times 19.032 = 0.7613 \text{ m}$

$\therefore C_d = \sqrt{\frac{h - h_f}{h}} = \sqrt{\frac{19.032 - 0.7613}{19.032}} = 0.98$

\therefore Discharge $= C_d \frac{a_1 a_2 \sqrt{2gh}}{\sqrt{a_1^2 - a_2^2}}$

$= \frac{0.98 \times 706.85 \times 78.54 \times \sqrt{2 \times 981 \times 1903.2}}{\sqrt{(706.85)^2 - (78.54)^2}}$

$= \frac{105132247.8}{\sqrt{499636.9 - 6168}} = 149692.8 \text{ cm}^3/\text{s} = 0.14969 \text{ m}^3/\text{s}. \text{ Ans.}$

P6: A 30cmX15cm Venturimeter is inserted in a vertical pipe carrying water flowing in the upward direction. A differential mercury

manometer connected to the inlet and throat gives a reading of 20cm. Find the discharge. Take $C_d = 0.98$

Solution. Given :

Dia. at inlet, $d_1 = 30 \text{ cm}$

$\therefore a_1 = \frac{\pi}{4} (30)^2 = 706.85 \text{ cm}^2$

Dia. at throat, $d_2 = 15 \text{ cm}$

$\therefore a_2 = \frac{\pi}{4} (15)^2 = 176.7 \text{ cm}^2$

$$h = x \left[\frac{S_f}{S_o} - 1 \right] = 20 \left[\frac{13.6}{1.0} - 1.0 \right] = 20 \times 12.6 = 252.0 \text{ cm of water}$$

$C_d = 0.98$

Discharge, $Q = C_d \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \times \sqrt{2gh}$

$$= 0.98 \times \frac{706.85 \times 176.7}{\sqrt{(706.85)^2 - (176.7)^2}} \times \sqrt{2 \times 981 \times 252}$$

$$= \frac{86067593.36}{\sqrt{499636.3 - 31222.9}} = \frac{86067593.36}{684.4}$$

$$= 125756 \text{ cm}^3/\text{s} = 125.756 \text{ lit/s. Ans.}$$

P7: A 20cmX10cm venturimeter is inserted in a vertical pipe carrying oil of sp.gr 0.8, the flow of oil is in the upward direction. The difference of levels between the throat and inlet section is 50cm. The oil mercury differential manometer gives a reading of 30cm of Mercury. Find the discharge of oil. Neglect the losses.

Solution. Dia. at inlet, $d_1 = 20 \text{ cm}$

$\therefore a_1 = \frac{\pi}{4} (20)^2 = 314.16 \text{ cm}^2$

Dia. at throat, $d_2 = 10 \text{ cm}$

$$\therefore a_2 = \frac{\pi}{4} (10)^2 = 78.54 \text{ cm}^2$$

Sp. gr. of oil, $S_o = 0.8$

Sp. gr. of mercury, $S_g = 13.6$

Differential manometer reading, $x = 30 \text{ cm}$


$$\begin{aligned} \therefore h &= \left(\frac{p_1}{\rho g} + z_1 \right) - \left(\frac{p_2}{\rho g} + z_2 \right) = x \left[\frac{S_g}{S_o} - 1 \right] \\ &= 30 \left[\frac{13.6}{0.8} - 1 \right] = 30 [17 - 1] = 30 \times 16 = 480 \text{ cm of oil} \end{aligned}$$

$$C_d = 1.0$$

The discharge,

$$\begin{aligned} Q &= C_d \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \times \sqrt{2gh} \\ &= \frac{1.0 \times 314.16 \times 78.54}{\sqrt{(314.16)^2 - (78.54)^2}} \times \sqrt{2 \times 981 \times 480} \text{ cm}^3/\text{s} \\ &= \frac{23932630.7}{304} = 78725.75 \text{ cm}^3/\text{s} = \mathbf{78.725 \text{ litres/s. Ans.}} \end{aligned}$$

P.8: In a vertical pipe conveying oil of specific gravity 0.8, two pressure gauges have been installed at A and B where the diameters are 16cm and 8cm respectively. A is 2 meters above B. The pressure gauge readings have shown that the pressure at B is greater than at A by 0.981N/cm². Neglecting all losses, calculate the flow rate. If the gauges at A and B are replaced by tubes filled with the same fluid and connected to a U tube containing Mercury, Calculate the difference of level of Mercury in the two limbs of the U tube.

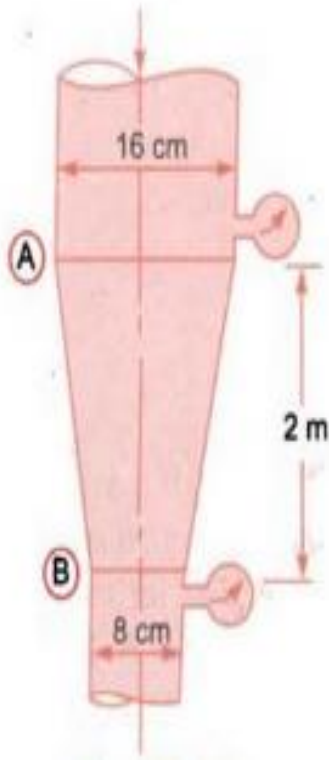

Solution. Given :

Sp. gr. of oil,

$$S_o = 0.8$$

∴ Density,

$$\rho = 0.8 \times 1000 = 800 \frac{\text{kg}}{\text{m}^3}$$

Dia. at A,

$$D_A = 16 \text{ cm} = 0.16 \text{ m}$$

∴ Area at A,

$$A_1 = \frac{\pi}{4} (.16)^2 = 0.0201 \text{ m}^2$$

Dia. at B,

$$D_B = 8 \text{ cm} = 0.08 \text{ m}$$

∴ Area at B,

$$A_2 = \frac{\pi}{4} (.08)^2 = 0.005026 \text{ m}^2$$

(i) Difference of pressures, $p_B - p_A = 0.981 \text{ N/cm}^2$

$$= 0.981 \times 10^4 \text{ N/m}^2 = \frac{9810 \text{ N}}{\text{m}^2}$$

Difference of pressure head

$$\therefore \frac{p_B - p_A}{\rho g} = \frac{9810}{800 \times 9.81} = 1.25$$

Applying Bernoulli's equation between A and B, taking the reference line passing through B, we have,

$$p_1/\gamma + v_1^2/2g + z_1 = p_2/\gamma + v_2^2/2g + z_2 + h_L$$

$$(p_A/\gamma - p_B/\gamma) + z_A - z_B = (v_B^2/2g - v_A^2/2g)$$

$$(p_A/\gamma - p_B/\gamma) + 2.0 - 0.0 = (v_B^2/2g - v_A^2/2g)$$

$$-1.25 + 2.0 = (v_B^2/2g - v_A^2/2g)$$

$$0.75 = (v_B^2 / 2g - v_A^2 / 2g) \text{ ----- (1)}$$

Now applying Continuity equation at A and B, we get,

$$A_A V_A = A_B V_B$$

$$V_B = A_A V_A / A_B = 4V_A$$

Substituting the value of V_B in equation (1), we get

$$0.75 = 16 v_A^2 / 2g - v_A^2 / 2g = 15 v_A^2 / 2g ; v_A = 0.99 \text{ m/s}$$

$$\text{Rate of flow, } Q = A_A V_A$$

$$Q = 0.99 * 0.01989 \text{ Cum/s}$$

Difference of level of mercury in the u – Tube:

Let x = Difference of Mercury level


$$\text{Then } h = x [(s_m/s_o) - 1]$$

$$h = (p_A / \gamma + z_A) - (p_B / \gamma + z_B)$$

$$= (p_A / \gamma - p_B / \gamma) + (z_A - z_B) = -1.25 + 2.00 = 0.75 \text{ m}$$

$$0.75 = x [(13.6/0.8) - 1] = 16x$$

$$X = 4.687 \text{ cm}$$

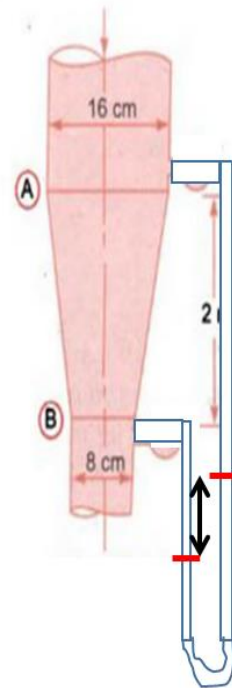


P.9: Find the discharge of water flowing through a pipe 30cm diameter placed in an inclined position where a venturimeter is inserted, having a throat diameter of 15 cm. The difference of pressure between the main and the throat is measured by a liquid of sp.gr. 0.6 in an inverted U tube which gives a reading of 30cm. The loss of head between the main and the throat is 0.2 times the kinetic head of the pipe.

Solution. Dia. at inlet = 30 cm
 $\therefore d_1 = 30 \text{ cm}$
 $a_1 = \frac{\pi}{4} (30)^2 = 706.85 \text{ cm}^2$
 Dia. at throat, $d_2 = 15 \text{ cm}$
 $\therefore a_2 = \frac{\pi}{4} (15)^2 = 176.7 \text{ cm}^2$

Reading of differential manometer, $x = 30 \text{ cm}$
 Difference of pressure head, h is given by

$$\left(\frac{p_1}{\rho g} + z_1 \right) - \left(\frac{p_2}{\rho g} + z_2 \right) = h$$

Also
$$h = x \left[1 - \frac{S_l}{S_o} \right]$$

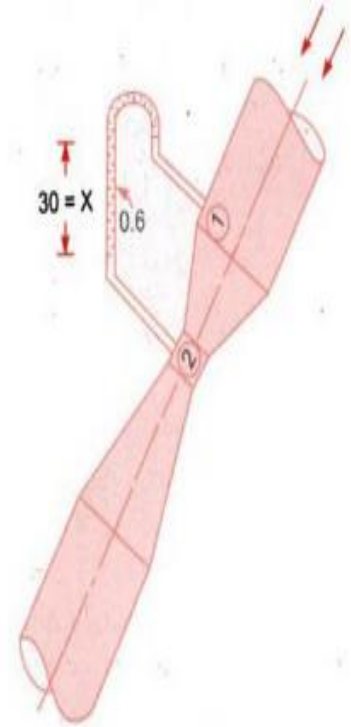

where $S_l = 0.6$ and $S_o = 1.0$

$$= 30 \left[1 - \frac{0.6}{1.0} \right] = 30 \times .4 = 12.0 \text{ cm of water}$$

Loss of head, $h_L = 0.2 \times \text{kinetic head of pipe} = 0.2 \times \frac{v_1^2}{2g}$

Now applying Bernoulli's equation at sections (1) and (2), we get

$$\frac{p_1}{\rho g} + z_1 + \frac{v_1^2}{2g} = \frac{p_2}{\rho g} + z_2 + \frac{v_2^2}{2g} + h_L$$

or
$$\left(\frac{p_1}{\rho g} + z_1 \right) - \left(\frac{p_2}{\rho g} + z_2 \right) + \frac{v_1^2}{2g} - \frac{v_2^2}{2g} = h_L$$

But
$$\left(\frac{p_1}{\rho g} + z_1 \right) - \left(\frac{p_2}{\rho g} + z_2 \right) = h = 12.0 \text{ cm of water}$$

and
$$h_L = 0.2 \times v_1^2 / 2g$$

$$\therefore 12.0 + \frac{v_1^2}{2g} - \frac{v_2^2}{2g} = 0.2 \times \frac{v_1^2}{2g}$$

$$\therefore 12.0 + 0.8 \frac{v_1^2}{2g} - \frac{v_2^2}{2g} = 0$$

Applying continuity equation at (1) and (2), we get

$$a_1 v_1 = a_2 v_2$$

$$\therefore v_1 = \frac{a_2}{a_1} v_2 = \frac{\frac{\pi}{4}(15)^2 v_2}{\frac{\pi}{4}(30)^2} = \frac{v_2}{4}$$

Substituting this value of v_1 in equation (1), we get

$$12.0 + \frac{0.9 \left(\frac{v_2}{4}\right)^2}{2g} - \frac{v_2^2}{2g} = 0 \quad \text{or} \quad 12.0 + \frac{v_2^2 \left[\frac{0.8}{16} - 1\right]}{2g} = 0$$

or
$$\frac{v_2^2}{2g} [0.05 - 1] = -12.0 \quad \text{or} \quad \frac{0.95 v_2^2}{2g} = 12.0$$

$$\therefore v_2 = \sqrt{\frac{2 \times 981 \times 12.0}{0.95}} = 157.4 \text{ cm/s}$$

$$\begin{aligned} \therefore \text{Discharge} &= a_2 v_2 \\ &= 176.7 \times 157.4 \text{ cm}^3/\text{s} = 27800 \text{ cm}^3/\text{s} = 27.8 \text{ litres/s. Ans.} \end{aligned}$$

P.10: A 30cmX15cm venturimeter is provided in a vertical pipe line carrying oil of specific gravity 0.9, the flow being upwards. The difference in elevation of the throat section and entrance section of the venturimeter is 30cm. The differential U- tube mercury manometer shows a gauge deflection of 25cm. Calculate:

1. The discharge of the oil and
2. The pressure difference between the entrance section and the throat section. Take the coefficient of meter as 0.98 and the specific gravity of Mercury as 13.6.

Solution. Given :

Dia. at inlet, $d_1 = 30 \text{ cm}$


\therefore Area, $a_1 = \frac{\pi}{4} (30)^2 = 706.85 \text{ cm}^2$

Dia. at throat, $d_2 = 15 \text{ cm}$

\therefore Area, $a_2 = \frac{\pi}{4} (15)^2 = 176.7 \text{ cm}^2$

Let section (1) represents inlet and section (2) represents throat. Then $z_2 - z_1 = 30 \text{ cm}$

Sp. gr. of oil, $S_o = 0.9$

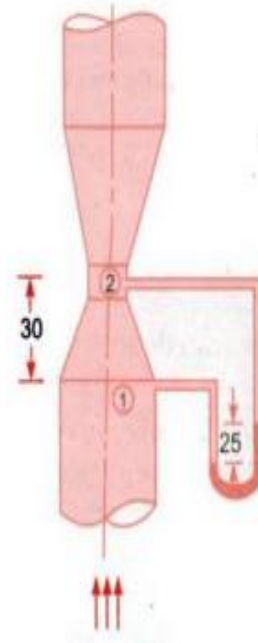

Sp. gr. of mercury, $S_g = 13.6$

Reading of diff. manometer, $x = 25 \text{ cm}$

The differential head, h is given by

$$h = \left(\frac{p_1}{\rho g} + z_1 \right) - \left(\frac{p_2}{\rho g} + z_2 \right)$$

$$= x \left[\frac{S_g}{S_o} - 1 \right] = 25 \left[\frac{13.6}{0.9} - 1 \right] = 352.77 \text{ cm of oil}$$

(i) The discharge, Q of oil

$$= C_d \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \times \sqrt{2gh}$$

$$= \frac{0.98 \times 706.85 \times 176.7}{\sqrt{(706.85)^2 - (176.7)^2}} = \sqrt{2 \times 981 \times 352.77}$$

$$= \frac{101832219.9}{684.4} = 148790.5 \text{ cm}^3/\text{s}$$

= 148.79 litres/s. Ans.

(ii) Pressure difference between entrance and throat section

$$h = \left(\frac{p_1}{\rho g} + z_1 \right) - \left(\frac{p_2}{\rho g} + z_2 \right) = 352.77$$

or
$$\left(\frac{p_1}{\rho g} - \frac{p_2}{\rho g} \right) + z_1 - z_2 = 352.77$$

But
$$z_2 - z_1 = 30 \text{ cm}$$

$$\therefore \left(\frac{p_1}{\rho g} - \frac{p_2}{\rho g} \right) - 30 = 352.77$$

$$\therefore \frac{p_1}{\rho g} - \frac{p_2}{\rho g} = 352.77 + 30 = 382.77 \text{ cm of oil} = 3.8277 \text{ m of oil. Ans.}$$

or
$$(p_1 - p_2) = 3.8277 \times \rho g$$

 But density of oil
$$= \text{Sp. gr. of oil} \times 1000 \text{ kg/m}^3$$

$$= 0.9 \times 1000 = 900 \text{ kg/cm}^3$$


$$\therefore (p_1 - p_2) = 3.8277 \times 900 \times 9.81 \frac{\text{N}}{\text{m}^2}$$

$$= \frac{33795}{10^4} \text{ N/cm}^2 = 3.3795 \text{ N/cm}^2. \text{ Ans.}$$

P.11: Crude oil of specific gravity 0.85 flows upwards at a volume rate of flow of 60 liter/sec through a vertical venturimeter with an inlet diameter of 200 mm and a throat diameter of 100mm. The coefficient of discharge of the venturimeter is 0.98. The vertical distance between the pressure tapings is 300mm.

1. If two pressure gauges are connected at the tapings such that they are positioned at the levels of their corresponding tapping points, determine the difference of readings in N/cm² of the two pressure gauges.
2. If a mercury differential manometer is connected in place of pressure gauge to the tapings such that the connecting tube upto mercury are filled with oil, determine the level of the mercury column.

Solution. Given :
Specific gravity of oil, $S_o = 0.85$

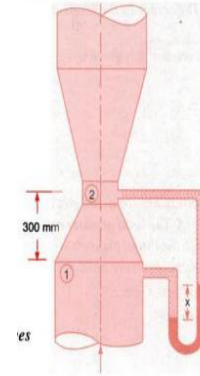

∴ Density,
Discharge,

$$\rho = 0.85 \times 1000 = 850 \text{ kg/m}^3$$

$$Q = 60 \text{ litre/s}$$

$$= \frac{60}{1000} = 0.06 \text{ m}^3/\text{s}$$

Inlet dia,

$$d_1 = 200 \text{ mm} = 0.2 \text{ m}$$

∴ Area,

$$a_1 = \frac{\pi}{4} (.2)^2 = 0.0314 \text{ m}^2$$

Throat dia.,

$$d_2 = 100 \text{ mm} = 0.1 \text{ m}$$

∴ Area,

$$a_2 = \frac{\pi}{4} (0.1)^2 = 0.00785 \text{ m}^2$$

Value of C_d

$$= 0.98$$

Let section (1) represents inlet and section (2) represents throat. Then

$$z_2 - z_1 = 300 \text{ mm} = 0.3 \text{ m}$$

(i) Difference of readings in N/cm^2 of the two pressure gauges
The discharge Q is given by,

$$Q = C_d \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \times \sqrt{2gh}$$

or

$$0.06 = \frac{0.98 \times 0.0314 \times 0.00785}{\sqrt{0.0314^2 - 0.00785^2}} \times \sqrt{2 \times 9.81 \times h}$$

$$= \frac{0.98 \times 0.00024649}{0.0304} \times 4.429 \sqrt{h}$$

∴

$$\sqrt{h} = \frac{0.06 \times 0.0304}{0.98 \times 0.00024649 \times 4.429} = 1.705$$

∴

$$h = 1.705^2 = 2.908 \text{ m}$$

But for a vertical venturimeter, $h = \left(\frac{p_1}{\rho g} + z_1 \right) - \left(\frac{p_2}{\rho g} + z_2 \right)$

$$\therefore 2.908 = \left(\frac{p_1}{\rho g} + z_1 \right) - \left(\frac{p_2}{\rho g} + z_2 \right) = \left(\frac{p_1}{\rho g} - \frac{p_2}{\rho g} \right) + z_1 - z_2$$

$$\frac{p_1 - p_2}{\rho g} = 2.908 + z_2 - z_1 = 2.908 + 0.3 \quad (\because z_2 - z_1 = 0.3 \text{ m})$$

$$= 3.208 \text{ m of oil}$$

$$\therefore p_1 - p_2 = \rho g \times 3.208$$

$$= 850 \times 9.81 \times 3.208 \text{ N/m}^2 = \frac{850 \times 9.81 \times 3.208}{10^4} \text{ N/cm}^2$$

$$= \mathbf{2.675 \text{ N/cm}^2. \text{ Ans.}}$$

(ii) *Difference in the levels of mercury columns (i.e., x)*

The value of h is given by, $h = x \left[\frac{S_g}{S_o} - 1 \right]$

$$\therefore 2.908 = x \left[\frac{13.6}{0.85} - 1 \right] = x [16 - 1] = 15x$$

$$\therefore x = \frac{2.908}{15} = 0.1938 \text{ m} = \mathbf{19.38 \text{ cm of oil. Ans.}}$$

MODULE-4

notes4free.in

ORIFICES AND MOUTHPIECES

Orifice: An opening, in a vessel, through which the liquid flows out is known as orifice. This hole or opening is called an orifice, so long as the level of the liquid on the upstream side is above the top of the orifice.

The typical purpose of an orifice is the measurement of discharge. An orifice may be provided in the vertical side of a vessel or in the base. But the former one is more common.

Types of Orifice

Orifices can be of different types depending upon their size, shape, and nature of discharge. But the following are important from the subject point of view.

- According to size:

- Small orifice
- Large orifice

According to shape:

- Circular orifice
- Rectangular orifice
- Triangular orifice

According to shape of edge:

- Sharp-edged
- Bell-mouthed

According to nature of discharge:


- Discharging free Orifice
- Fully submerged Orifice
- Partially submerged Orifice

Venacontracta

Consider an orifice is fitted with a tank. The liquid particles, in order to flow out through the orifice, move towards the orifice from all directions. A few of the particles first move downward, then take a turn to enter into the orifice and then finally flow through it.

The liquid flowing through the orifice forms a jet of liquid whose area of cross-section is less than that of the orifice. The area of jet of fluid goes on decreasing and at section C-C, the area is minimum.

This section is approximately at a distance of half of diameter of the orifice. At this section, the streamlines are straight and parallel to the each other and perpendicular to the plane of the orifice. This section is called vena-contracta. Beyond this section, the jet diverges and is attracted in the downward direction by the gravity.

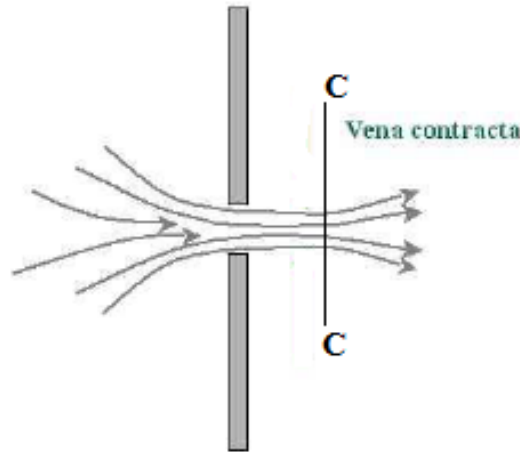

Venacontracta

Hydraulic Coefficients

The following four coefficients are known as hydraulic coefficients or orifice coefficients.

1. **Coefficient of Contraction:** The ratio of the area of the jet, at vena-contracta, to the area of the orifice is known as coefficient of contraction.

$$C_c = \frac{\text{area of the jet at venacontracta}}{\text{area of the orifice}}$$

The value of Coefficient of contraction varies slightly with the available head of the liquid, size and shape of the orifice. The average value of C_c is 0.64

2. **Coefficient of Velocity:** The ratio of actual velocity of the jet, at Vena-contracta, to the theoretical velocity is known as coefficient of velocity. The theoretical velocity of jet at Vena-contracta is given by the relation, $v = \sqrt{2gh}$

$$C_v = \frac{\text{actual velocity of the jet at Venacontracta}}{\text{theoretical velocity}}$$

The difference between the velocities is due to friction of the orifice. The value of Coefficient of velocity varies slightly with the different shapes of the edges of the orifice. This value is very small for sharp-edged orifices. For a sharp edged orifice, the value of C_v increases with the head of water. theoretical


3. **Coefficient of Discharge** The ratio of a actual discharge through an orifice to the theoretical discharge is known as coefficient of discharge. Mathematically coefficient of discharge,

$$C_d = \frac{\text{actual discharge}}{\text{theoretical discharge}} = \frac{\text{actual velocity} \times \text{actual area}}{\text{theoretical velocity} \times \text{theoretical area}} = C_v \times C_c$$

Thus the value of coefficient of discharge varies with the values of C_c and C_v . An average of coefficient of discharge varies from 0.60 to 0.64.

Discharge through the Orifice

Consider a tank fitted with circular orifice in one of its sides as shown in fig. let H be the head of the liquid above the liquid above the center of orifice.

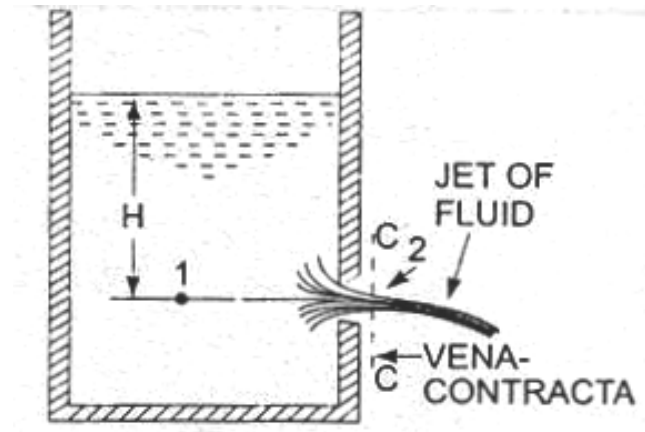

Flow through orifice

Consider two points 1 and 2 as shown in the fig. point 1 is inside the tank and point 2 at vena-contracta. let the flow be steady and at a constant head H .

Applying Bernoulli's equation between 1 and 2

$$\frac{p_1}{\rho g} + \frac{v_1^2}{2g} + z_1 = \frac{p_2}{\rho g} + \frac{v_2^2}{2g} + z_2$$

But, $z_1 = z_2$,

Hence,

$$\frac{p_1}{\rho g} + \frac{v_1^2}{2g} = \frac{p_2}{\rho g} + \frac{v_2^2}{2g}$$

Also

$$\frac{p_1}{\rho g} = H$$

$$\frac{p_2}{\rho g} = 0 \text{ (atmospheric pressure)}$$

v_1 is very small in comparison to v_2 as area of the tank is very large compared to area of the jet

$$\therefore H + 0 = 0 + \frac{v_2^2}{2g}$$


$$\therefore v_2 = \sqrt{2gH}$$

This is the expression for the theoretical velocity.

Experimental determination of hydraulic coefficients

Determination of C_d

Water is allowed to flow through a orifice fitted to a tank under a constant head, H as shown in Fig. The water collected in the measuring tank for a known time, t . the height of water in measuring tank

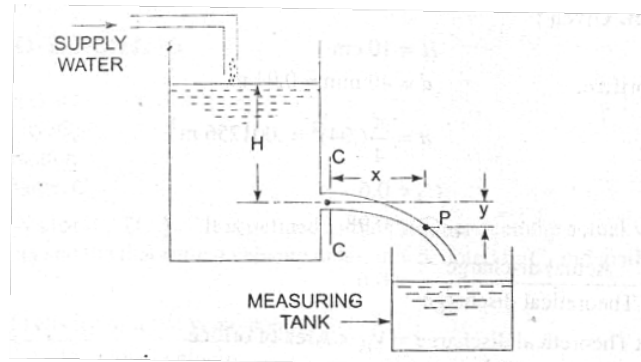

Value of C_v

is noted down. then actual discharge through orifice

$$Q = \frac{\text{area of measuring tank} \times \text{height of water in measuring tank}}{\text{Time}(t)}$$

and theoretical discharge = area of the orifice $\times \sqrt{2gH}$

$$C_d = \frac{Q}{a \times \sqrt{2gH}}$$

Determination of C_v

Co-efficient of velocity,

$$C_v = \frac{x}{\sqrt{4yH}}$$

where, x = Horizontal distance traveled by the particle in time 't'

y = vertical distance between p and $C-C$ (refer fig: Value of C_v)

Determination of C_c

$$C_d = C_v \times C_c$$


Mouthpiece

Mouthpiece is a short tube of length not more than two or three times its diameter, provided in a tank or a vessel containing fluid such that it is an extension of the orifice and through which also the fluid may discharge. Both orifice and mouthpiece are usually used for measuring the rate of flow.

Classification of Mouthpiece

1. Based on the position with respect to the tank or vessel to which they are fitted
 - (a) External mouthpiece
 - (b) Internal mouthpiece
2. Based on the shape:
 - (a) Cylindrical mouthpiece
 - (b) Convergent mouthpiece
 - (c) Convergent-divergent mouthpiece
3. Based on the nature of discharge at outlet of mouthpiece.
 - (a) Mouthpieces running full
 - (b) Mouthpieces running free

Flow through Mouthpiece

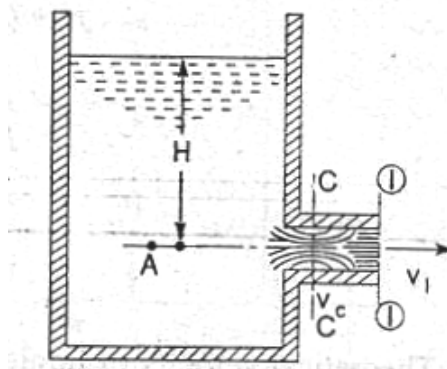

Flow through mouthpiece

Consider a tank having an external cylindrical mouthpiece of C/S area a_1 , attached to one of its sides as shown in Fig. The jet of liquid entering the mouthpiece contracts to form a vena-contracta at a section C-C. Beyond this section, the jet again expands and fills the mouthpiece completely.

Let H = Height of liquid above the centre of mouthpiece

v_c = Velocity of liquid at C-C section

a_c = Area of flow at vena-contracta

v_1 = Velocity of liquid at outlet

a_1 = Area of mouthpiece at vena-contracta

C_c = Co-efficient of contraction.

Fluid Mechanics

Applying continuity equation at C-C and (1)-(1), we get

$$a_c \times v_c = a_1 \times v_1$$
$$\therefore v_c = \frac{a_1 v_1}{a_c} = \frac{v_1}{a_c/a_1}$$

But

$$\frac{a_c}{a_1} = C_c = C_o - \text{efficient of contraction}$$

taking $C_d=0.62$, we get $\frac{a_c}{a_1} = 0.62$

$$\therefore v_c = \frac{v_1}{0.62}$$

the jet of liquid from section C-C suddenly enlarges at section (1)-(1). Due to sudden enlargement, there will be loss of head, h_L^* which is given as

$$h_L^* = \frac{(v_c - v_1)^2}{2g}$$

But,

$$v_c = \frac{v_1}{0.62} = \frac{\left(\frac{v_1}{0.62} - v_1\right)^2}{2g} = \frac{v_1^2}{2g} \left[\frac{1}{0.62} - 1 \right] = \frac{0.375 v_1^2}{2g}$$

Applying Bernoulli's equation to point A (1)-(1)

$$\frac{p_1}{\rho g} + \frac{v_1^2}{2g} + z_A = \frac{p_2}{\rho g} + \frac{v_2^2}{2g} + z_1 + h_L$$

where $z_A = z_1$, v_A is negligible,

$$\frac{p_1}{\rho g} = \text{atmospheric pressure} = 0$$

$$\therefore H + 0 = 0 + \frac{v_1^2}{2g} + 0.375 \frac{v_1^2}{2g}$$

$$H = 1.375 \frac{v_1^2}{2g}$$

$$v_1 = \sqrt{\frac{2gH}{1.375}} = 0.855 \sqrt{2gH}$$

Theoretical velocity of liquid at outlet is $v_{th} = \sqrt{2gH}$

\therefore

Co-efficient of velocity for mouthpiece

$$C_v = \frac{\text{Actual velocity}}{\text{Theoretical velocity}} = \frac{0.855 \sqrt{2gH}}{\sqrt{2gH}} = 0.855$$

C_c for mouthpiece = 1 as the area of the area of jet of liquid at out let is equal to area of the mouthpiece.
Thus,


$$C_d = C_v \times C_c = 1.0 \times 0.855 = 0.855$$

Borda's mouthpiece

A short cylindrical tube attached to an orifice in such away that the tube projects inwardly to a tank, is called as Borda's mouthpiece or Re-entrant mouthpiece or internal mouthpiece.

Borda's Mouthpiece running free

If the length of the tube is equal to its diameter, the jet of the liquid comes out from mouthpiece without touching the sides of tube.

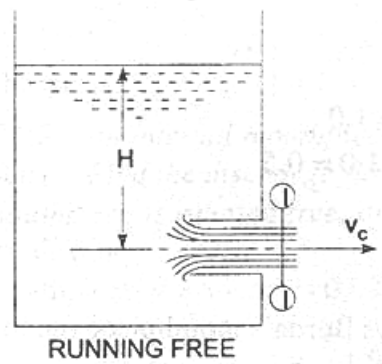

Mouthpiece running free


Discharge,

$$Q = 0.5 \times a \sqrt{2gH}$$

where H= height of the fluid above the mouthpiece,
a=area of the mouthpiece

Boarda's Mouthpiece running full

If the length of the tube is about 3 times its diameter, the jet comes out with its diameter equal to diameter of the mouthpiece at outlet.

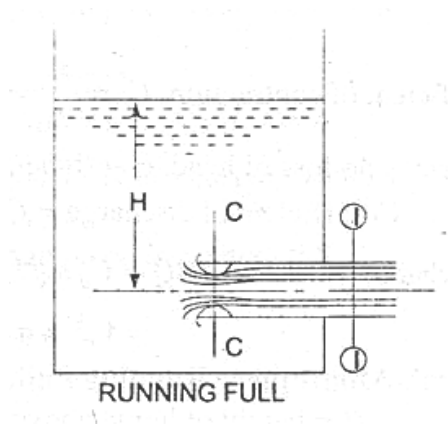

Mouthpiece running full

Discharge,

$$Q = 0.707 \times a \sqrt{2gH}$$

where H= height of the fluid above the mouthpiece,


a=area of the mouthpiece

notes4free.in


NOTCHES AND WEIRS

A notch is a device used for measuring the rate of flow of a liquid through a small channel or tank. It is an opening in the side of a measuring tank or reservoir such that the water level is always below the top edge of the opening.

A weir is a concrete or a masonry structure, placed in an open channel over which the flow occurs. It is generally in the form of vertical wall, with Bell mouthed edge.

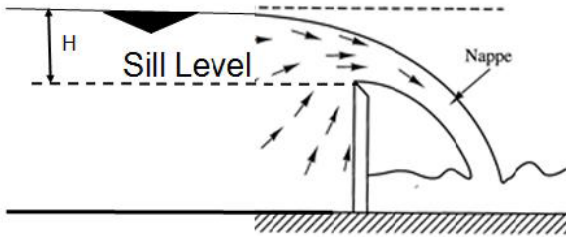

(a) Notch

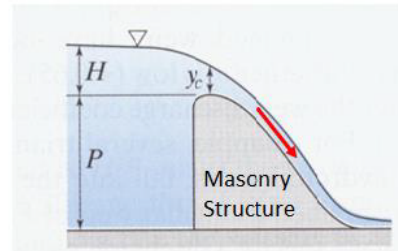

(b) Weir

Note: The sheet of water flowing over a notch or a weir is known as Nappe. The bottom edge of the opening is known as 'Sill' or Crest.

Classification of notches

- According to the shape of opening
 - Rectangular notch
 - Triangular notch
 - Trapezoidal notch
 - Stepped notch
- According to the effect of the sides on the nappe:
 - Notch with end contraction
 - Notch without end contraction or suppressed notch


Discharge over a Rectangular notch

Consider a sharp edge rectangular notch with crest horizontal and normal to direction of flow. Let, H = Head of water over the crest,

L = length of notch or weir

consider an elementary horizontal strip of water of thickness dh and length L at a depth ' h ' from free surface of water as shown in Fig.

The area of the strip = $L \times dh$

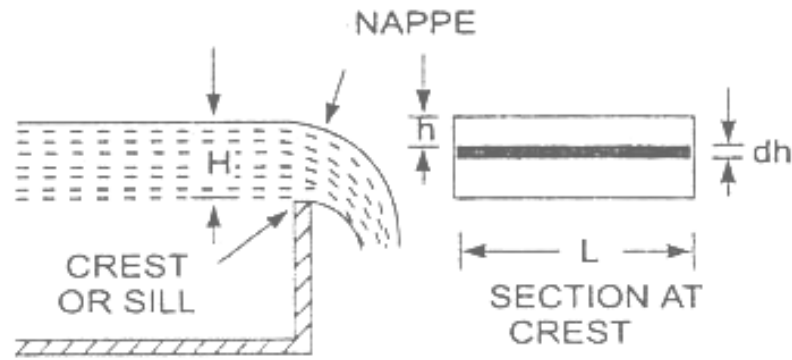

Rectangular Notch

and theoretical velocity of water flowing through strip = $\sqrt{2gh}$

The discharge dQ , through strip is

$$dQ = C_d \times \text{Area of strip} \times \text{theoretical velocity} = C_d \times L \times dh \times \sqrt{2gh}$$

where C_d = Co-efficient of discharge.

The total discharge, Q , for the whole notch or weir is determined by integrating the above equation between limits 0 and H .

$$\begin{aligned} Q &= \int_0^H C_d L \sqrt{2gh} dh = C_d \times L \times \sqrt{2g} \int_0^H h^{1/2} dh \\ &= C_d \times L \times \sqrt{2g} \left[\frac{h^{1/2+1}}{\frac{1}{2}+1} \right]_0^H \\ &= C_d \times L \times \sqrt{2g} \left[\frac{h^{3/2}}{\frac{1}{2}} \right]_0^H \\ &= \frac{2}{3} C_d L \sqrt{2g} [H]^{3/2} \end{aligned}$$

Discharge over a Triangular notch

Discharge over a triangular notch or weir is same. Let H = head of the water above the V-notch

θ = angle of notch

consider a horizontal strip of water of thickness 'dh' at a depth of 'h' from free surface as shown in fig. from the fig we have


$$\tan \theta/2 = \frac{AC}{OC} = \frac{AC}{H-h}$$

$$\therefore AC = (H-h) \tan \theta/2$$

$$\text{Width of strip} = AB = 2AC = 2(H-h) \tan \theta/2$$

$$\therefore \text{area of the strip} = 2(H-h) \tan \frac{\theta}{2} \times dh$$

The theoretical velocity of water through strip = $\sqrt{2gh}$

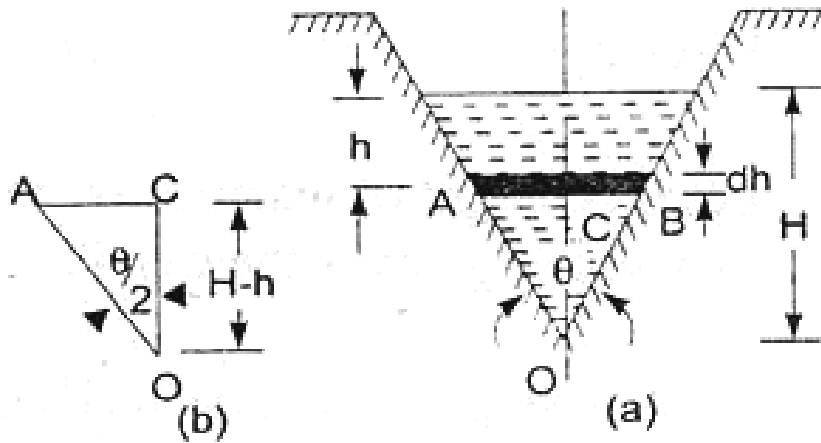

Triangular Notch

∴ Discharge, dQ , through the strip is

$$dQ = C_d \times \text{area of strip} \times \text{Velocity(theoretical)}$$

$$= C_d \times 2(H-h) \tan \frac{\theta}{2} \times dh \times \sqrt{2gh}$$

∴ Total discharge, Q is

notes4free.in

$$Q = \int_0^H 2C_d(H-h) \tan \frac{\theta}{2} \times \sqrt{2gh} \times dh$$

$$= 2C_d \tan \frac{\theta}{2} \times \sqrt{2g} \int_0^H (Hh^{1/2} - h^{3/2}) dh$$

$$= 2C_d \tan \frac{\theta}{2} \sqrt{2g} \left[\frac{Hh^{3/2}}{3/2} - \frac{h^{5/2}}{5/2} \right]_0^H$$

$$= 2C_d \tan \frac{\theta}{2} \sqrt{2g} \left[\frac{2}{3} H^{5/2} - \frac{2}{5} H^{5/2} \right]$$


$$= \frac{8}{15} C_d \tan \frac{\theta}{2} \sqrt{2g} \times H^{5/2}$$

Advantages of triangular notch/weir or rectangular notch/weir

- Expression for discharge for a right angled V-notch or weir is very simple.
- In case of triangular notch, only one reading, (H) is required for computation of discharge.
- Ventilation of triangular notch is not necessary.
- For measuring low discharge, a triangular notch gives more accurate results than a rectangular notch.

Discharge over a Trapezoidal notch

Trapezoidal notch is combination of rectangular and triangular notch or weir. thus the total discharge will be equal to the sum of discharge through a rectangular notch and discharge through triangular notch as shown in fig below

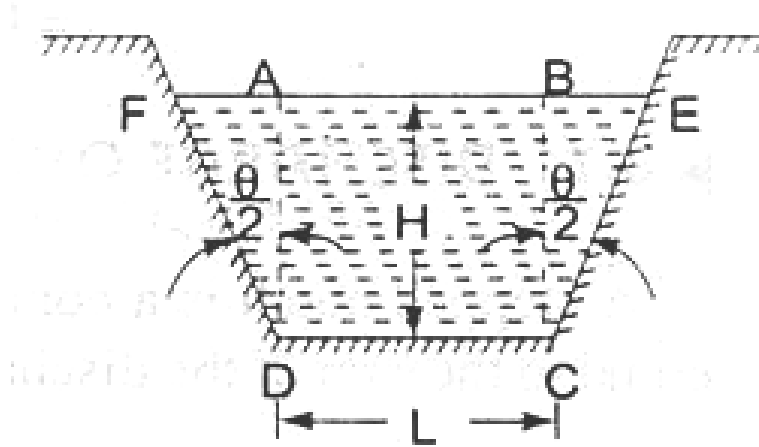

Trapezoidal Notch

Let H = head of the water above the V-notch

L = Length of the crest of the notch

C_{d1} = co-efficient of discharge for rectangular portion ABCD

C_{d2} = co-efficient of discharge for triangular portion [FAD and BCE]

The discharge through rectangular portion ABCD is given by

$$Q_1 = \frac{2}{3} C_{d1} \times L \sqrt{2g} \times H^{3/2}$$

The discharge through two triangular notches FCA and BCE is equal to discharge single triangular notch of angle θ and it is given by equation as

$$Q_2 = \frac{8}{15} C_{d2} \tan \frac{\theta}{2} \sqrt{2g} \times H^{5/2}$$


\therefore Discharge through trapezoidal notch,

$$Q = \frac{2}{3} C_{d1} \times L \sqrt{2g} \times H^{3/2} + \frac{8}{15} C_{d2} \tan \frac{\theta}{2} \sqrt{2g} \times H^{5/2}$$

Cipolletti Notch or Weir

Cipolletti weir is trapezoidal weir, which has sides slopes of 1 horizontal to 4 vertical as shown in figure. Thus from fig,

$$\begin{aligned} \tan \frac{\theta}{2} &= \frac{AB}{BC} = \frac{H/2}{H} = \frac{1}{4} \\ \therefore \frac{\theta}{2} &= \tan^{-1} \frac{1}{4} = 14^{\circ} 2' \end{aligned}$$

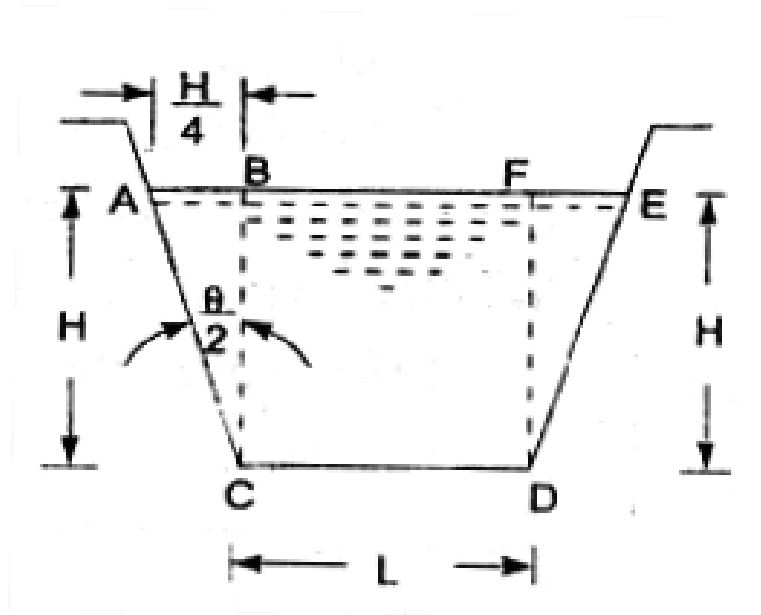

Cipolletti weir

By giving this slopes to the sides an increase in discharge through the triangular portions ABC and DEF of the weir is obtained. if this slope is not provided the weir would be a rectangular one, and due to end contraction, the discharge would decrease thus in case of Cippolletti weir, the factor of end contraction is not required which is shown below. the discharge through a rectangular weir with two end contraction is

$$Q = \frac{2}{3} \times C_d \times (L - 0.2H) \times \sqrt{2g} \times H^{3/2}$$

$$= \frac{2}{3} \times C_d \times \sqrt{2g} \times H^{3/2} - \frac{2}{15} \times C_d \times \sqrt{2g} \times H^{5/2}$$

Thus due to end contraction, the discharge decreases by $\frac{2}{15} C_d \times \sqrt{2g} \times H^{5/2}$. This decrease discharge can be compensated by giving such slope to the sides that the discharge through two triangular portions is equal to $\frac{2}{15} C_d \times \sqrt{2g} \times H^{5/2}$. Let the slope is given by $\theta/2$. the discharge through a V-notch of angle θ is given by

$$= \frac{8}{15} \times C_d \times \sqrt{2g} \times \tan \frac{\theta}{2} H^{5/2}$$

Thus

$$\frac{8}{15} \times C_d \times \sqrt{2g} \times \tan \frac{\theta}{2} H^{5/2} = \frac{2}{15} \times C_d \times \sqrt{2g} \times \tan \frac{\theta}{2} H^{5/2}$$

$$\therefore \tan \frac{\theta}{2} = \frac{2}{15} \times \frac{15}{8} = \frac{1}{4}$$

or

$$\theta/2 = 14^\circ 2'$$

Thus discharge through Cipoletti weir is

$$Q = \frac{2}{3} \times C_d \times L \times \sqrt{2g} \times H^{3/2}$$

If the velocity of approach is considered,

$$Q = \frac{2}{3} \times C_d \times (L) \times \sqrt{2g} \left[(H + h_a)^{3/2} - h_a^{3/2} \right]$$

Velocity of Approach

It is defined as the velocity with which the flow approaches/reaches the notch/weir before it flows past it. The velocity of approach for any horizontal element across the notch depends only on its depth below the free surface.

In most of the cases such as flow over a notch/weir in the side of the reservoir, the velocity of approach may be neglected. But, for the notch/weir placed at the end of the narrow channel, the velocity of approach to the weir will be substantial and the head producing the flow will be increased by the kinetic energy of the approaching liquid.

Thus, if v_a is the velocity of approach, then the additional head h_a due to velocity of approach, acts on the water flowing over the notch or weir. So, the initial and final height of water over the notch/weir will be $(H + h_a)$ and h_a respectively. It may be determined by finding the discharge over the notch/weir neglecting the velocity of approach i.e.

$$v_a = \frac{Q}{A}$$

where 'Q' is the discharge over the notch/weir and 'A' is the cross-sectional area of channel on the upstream side of the weir/notch. Additional head corresponding to the velocity of approach will be,


$$H_a = \frac{v_a^2}{2g}$$

Example:- The discharge over a rectangular notch/weir of width L,

$$Q = \frac{2}{3} \times C_d \times (L) \times \sqrt{2g} \left[(H + h_a)^{3/2} - h_a^{3/2} \right]$$

Broad crested weir

A weir having a wide crest is known as broad crested weir. Broad-crested weirs differ from thin-plate and narrow-crested weirs by the fact that different flow pattern is developed.

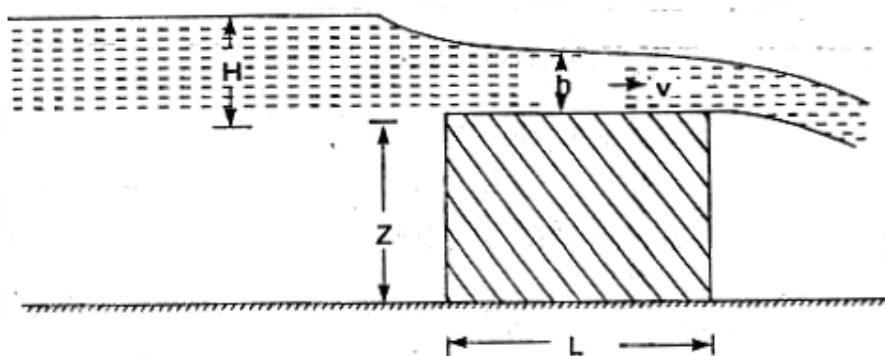

Broad crested weir

Condition for a weir to be broad or narrow.

Let H= height of water, above the crest,

L=length of crest.

- If $2L > H$, the weir is called broad crested weir.
- If $2L < H$, the weir is called narrow crested weir.

(Refer above fig.)

Let h= head of water at the middle o weir which is constant

v=velocity of flow over the weir applying bernoullies equation to the still water surface on U/S side and running water at the end of the weir,

$$0 + 0 + H = 0 + \frac{v^2}{2g} + h$$
$$\frac{v^2}{2g} = H - h$$
$$v = \sqrt{2g(H - h)}$$

The discharge over weir

notes4free.in

$$Q = C_d \times \text{Area of flow} \times \text{velocity}$$
$$= C_d \times L \times h \times \sqrt{2g(H - h)}$$
$$= C_d \times L \times \sqrt{2g(Hh^2 - h^3)}$$

discharge is maximum if $(Hh^2 - h^3)$ is maximum or


$$\frac{d}{dh}(Hh^2 - h^3) = 0 \text{ or } h = \frac{2}{3}H \therefore$$

Q_{max} will be obtained by substituting this valve of h in the above discharge equation

$$Q_{max} = C_d \times L \times \sqrt{2g \left[H \times \left(\frac{2}{3}H \right)^2 - \left(\frac{2}{3}H \right)^3 \right]}$$
$$= C_d \times L \times \sqrt{2g \sqrt{\frac{4}{9}H^3 - \frac{8}{27}H^3}}$$
$$= C_d \times L \times \sqrt{2g} \times 0.3849 \times H^{(3/2)}$$
$$= 1.705 \times C_d \times L \times H^{(3/2)}$$

Submerged weir

When the water level on the down stream side of a weir is above the crest of the weir, then weir is said to be submerged weir. Below fig shows a submerged weir.

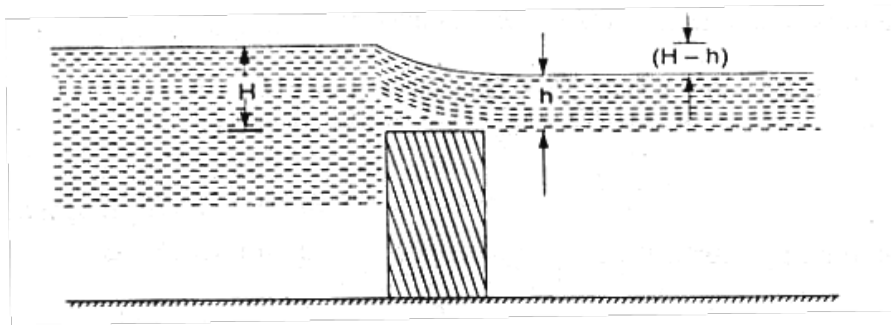

Submerged weir

The total discharge is obtained by dividing the weir into two parts. The portion between U/S and D/S water surface may be treated as free weir and the portion between D/S water surface and crest of weir as a drowned weir. Total discharge is given by

$$Q = \frac{2}{3} C_{d1} \times L \times \sqrt{2g} [H - h]^{3/2} + C_{d2} \times L \times h \times \sqrt{2g(H - h)}$$

notes4free.in

MODULE-5

- **Module-5 : Surge Analysis in Pipes**

by

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka State

Module-5: Surge Analysis in Pipes

Water hammer in pipes, equations for rise in pressure due to gradual valve closure and sudden closure for rigid and elastic pipes. Problems.

Water hammer – changes occur very quickly, the analysis involves consideration of wave propagation velocity, compressibility of the fluid and elasticity of the system. Solution requires graphical or computer based numerical techniques eg) rapid valve operation, pump shutdown and turbine load rejection. Water Hammer is also called fluid or pressure transients.

Some typical damages



Burst pipe in power



Pipe damage in

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka



Water Hammer Phenomenon in pipelines: A sudden change of flow rate in a large pipeline (due to valve closure, pump turnoff, etc.) involve a great mass of water moving inside the pipe. The force resulting from changing the speed of the water mass may cause a pressure rise/ pressure drop in the pipe with a magnitude several times greater/less than the normal static pressure in the pipe. This may set up a noise known as knocking. This phenomenon is commonly known as the water hammer phenomenon

(a) Steady state prior to valve closure

(b) Rapid valve closure – pressure increase, pipe walls expand, liquid compression; transient conditions propagate upstream

Factors affecting water hammer phenomenon:

- (i) Length of Pipeline (ii) Diameter of the pipeline
- (iii) Material of the pipeline (iv) Discharge
- (v) Thickness of pipeline (vi) Time of valve closure

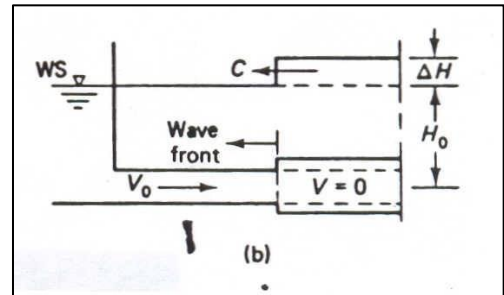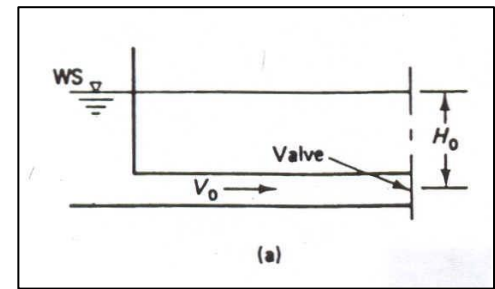


Theory of unsteady flow in pipes

Case 1 – Incompressible fluid and rigid pipe

The closure of a valve at the downstream end of a pipe through which the fluid is passing, results in an immediate rise in pressure. Opening of a downstream valve results in an immediate drop in pressure.

The change in pressure is due to the change in inertia (mass x acceleration). Case 1 is only to be used when the valve is closed very slowly or the pipe is very short.

Consider a rigid pipe joining two reservoirs:-

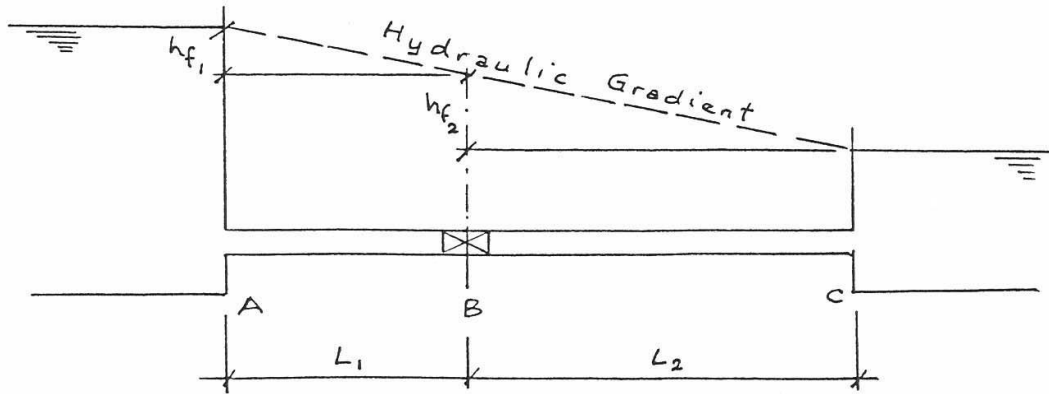


Neglecting velocity heads and minor losses, the hydraulic gradient shown gives the pressure for all points along the pipeline, with steady flow Q and the valve fully open.

$$\text{Now, } h_f = \frac{\lambda L Q^2}{12.1 d^5}$$

$$\text{ie) } \frac{h_f}{L} = \frac{\lambda Q^2}{12.1 d^5} = \text{hydraulic gradient}$$

If the valve is closed gradually, there is a change in pressure throughout the pipeline as soon as the valve starts to close.

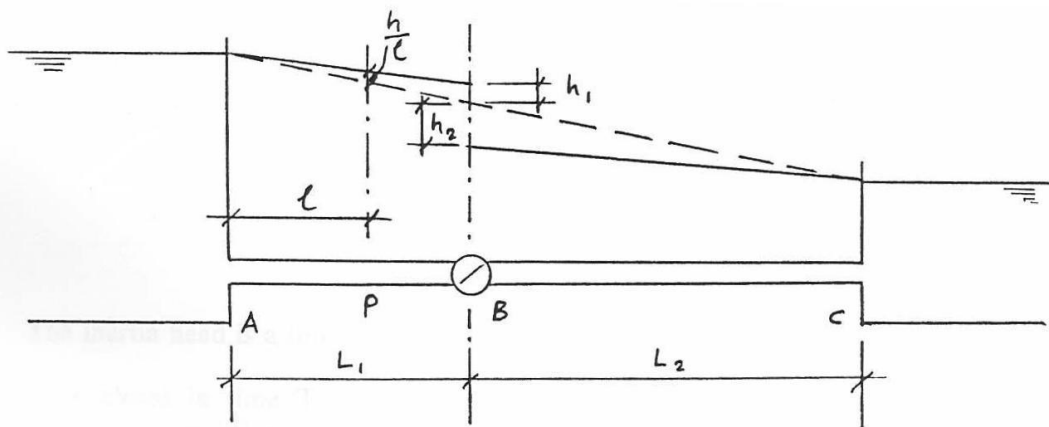

Upstream of the valve, the pressure rises by an amount h_1 and falls by an amount h_2 downstream of the valve. The change in pressure is caused by a change in inertia at the valve.

The fluid approaching the valve finds its path impeded and is unable to move with its previous velocity $v (= \frac{Q}{A})$ and since the water is incompressible the whole of column AB is retarded i.e. suffers from a negative acceleration. From Newton's Second Law of Motion, the mass of the

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

water in the pipe multiplied by the acceleration is equal to the force applied. This force is equal to the inertia head, h_1 multiplied by the cross sectional area at B.

$$\text{Mass of fluid column AB} = \rho AL_1$$

$$\text{Acceleration} = \frac{dv}{dt}$$


$$\therefore \rho AL_1 \frac{dv}{dt} = - \rho gh_1 A$$

$$\text{ie) at B : } h_1 = - \frac{L}{g} \frac{dv}{dt} \quad \left[\text{where } \frac{dv}{dt} \text{ is negative} \right]$$

$$h = - \frac{L}{g} \frac{dv}{dt}$$

and in general, for any point on the pipeline:-

For the valve just reaching the closed position:-

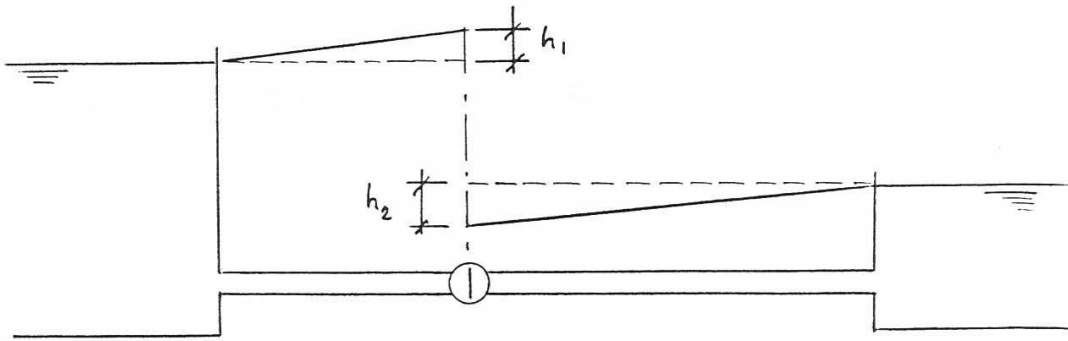

The inertia head is a function of $\frac{dv}{dt}$ and therefore could be complex. However if the valve closes in time T , such that the retardation is at a constant rate, then the acceleration in AB is $\frac{v}{T}$.

Therefore in this case the general expression becomes

#


$$h = \frac{L}{g} \frac{v}{T}$$

Case 2 - Compressible fluid and rigid pipe


In case 1, the pressures obtained are only accurate if the change of velocity is slow and smooth. If the change of velocity is sudden ie) $T = 0$, then $\frac{dv}{dt}$ would be infinite and the pressure change would be infinite. This is not the case. Because of the elastic nature of the system, the water column acts like a goods train with loose couplings which stops suddenly. Before considering case 2 in detail, it is useful to consider the general case of an elastic pipe and fluid (neglecting friction at this stage).

If fluid is flowing at velocity v , in a pipe length L , cross sectional area A and a valve is suddenly closed downstream, then a pressure wave moves upstream with a velocity, c . Behind the wave the water is compressed and the pipe walls are stretched and at the same time the fluid is still entering the pipe upstream, with its original velocity v . The wave from continues until it reaches the upstream end, taking time $\frac{L}{c}$ to reach there.

The time $\frac{2L}{c}$ is known as the pipe period (see later notes).

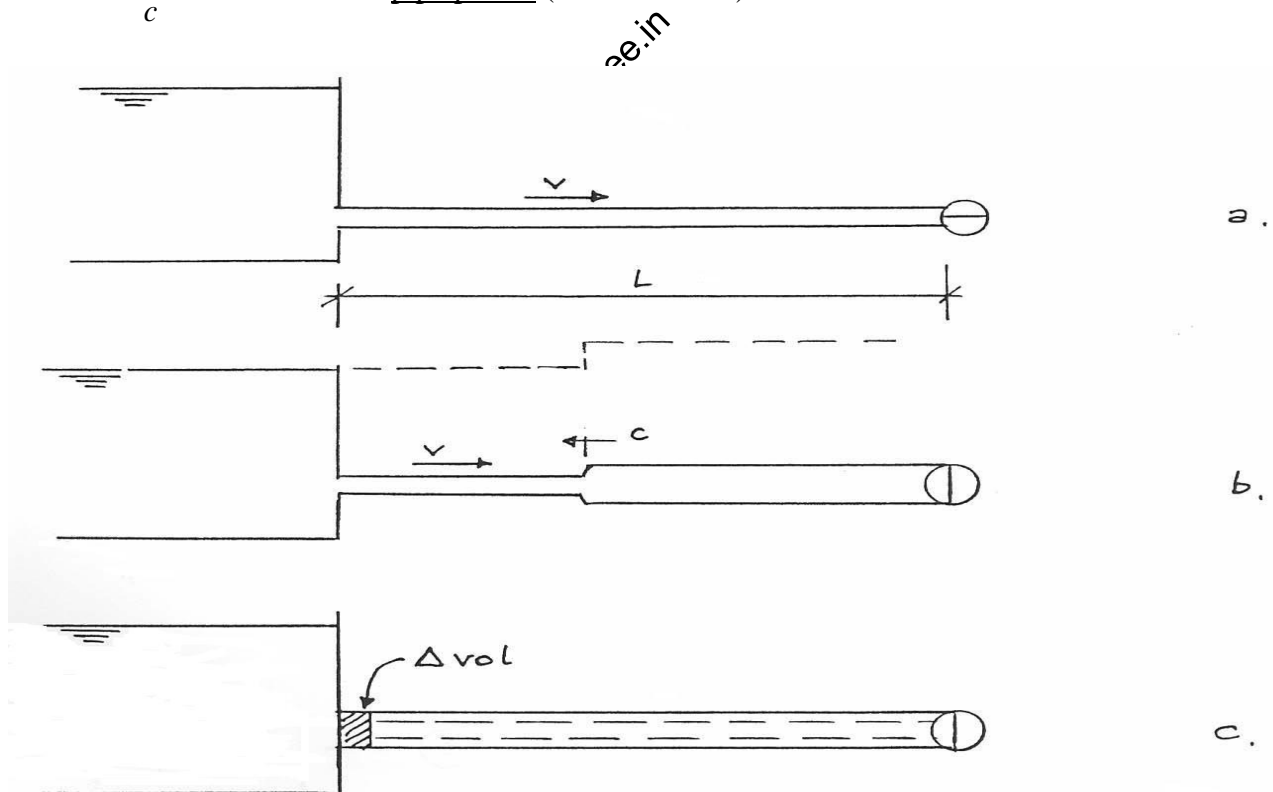

Returning to case 2, if the pipe walls are rigid, the whole of the extra volume Δvol is added to the original amount of fluid in the pipe. The extra and original volume occupy the same space, AL .

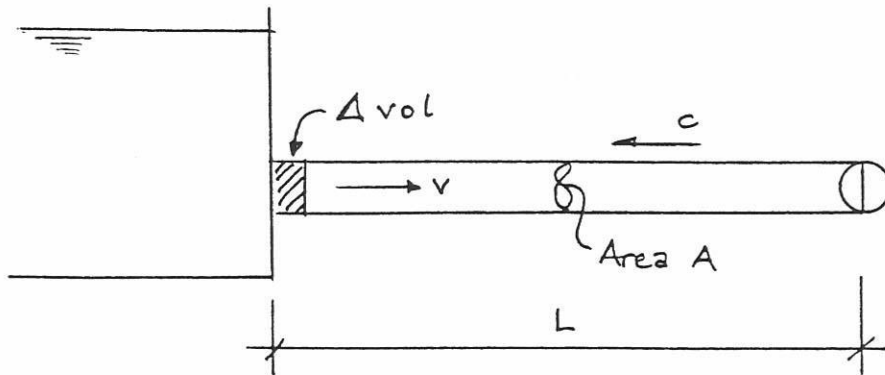

[The amount of fluid, extra, in the pipe after the valve closure, before the fluid from the right hand side reaches the reservoir, is equal to the volume

$$\Delta \text{vol} = \text{velocity} \times \text{area} \times \frac{L}{c} .]$$

notes4free.in

Now, the increase in pressure, $p = k \cdot \frac{\Delta \text{vol}}{\text{Vol}}$

$$= k \cdot \frac{\Delta \text{vol}}{A.L}$$

where k = bulk modulus of the fluid

= degree of compressibility of the fluid

$$= - \frac{\delta p}{\delta \text{Vol} / \text{Vol}}$$

and since $\Delta \text{vol} = v.A \cdot \frac{L}{c}$

then $p = k \cdot \frac{v.A \cdot \frac{L}{c}}{A.L}$

\therefore $P = k \cdot \frac{v}{c}$ _____ 1


notes4free.in

k = bulk modulus

v = initial velocity

c = velocity of propagation of wave

In order to analyse the position where the wave front meets the original flow, it is necessary to bring the wave from rest ie) by applying a velocity c in the opposite direction.

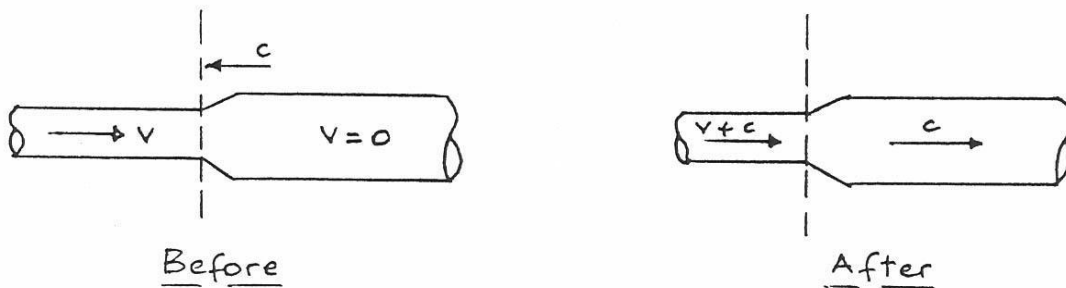

Now mass flow rate = $\rho A c$ [neglecting v since it is insignificant compared to c]

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

Change in velocity = v

Rate of momentum = Applied force due to pressure, p

$$\therefore \rho A c v = p A$$

ie)
$$c = \frac{P}{\rho v}$$

Substituting in 1 gives:-

$$P = k \cdot \frac{v}{P/\rho v}$$

ie)
$$P^2 = v^2 \rho k$$

$$\therefore P = v \sqrt{\rho k}$$
 _____ 2

As head of fluid, $h = \frac{P}{\rho g}$

$$h = v \frac{\sqrt{\rho k}}{\rho g}$$

$$\therefore h = \frac{v}{g} \sqrt{\frac{k}{\rho}}$$
 _____ 3

This means that the pressure developed, p, is independent of pipe dimensions for a given velocity.

Combining 1 and 2

$k \frac{v}{c} = v \sqrt{\rho k}$ ie)
$$c = \sqrt{\frac{k}{\rho}}$$
 _____ 4
Velocity of propagation wave

Remember, still considering Case 2 – compressible fluid and rigid pipe. The following example illustrates the magnitude of the velocities.

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

A representative value of k for water is 2.05GN/m^2 and so the wave velocity in a rigid pipe is:-

$$c = \sqrt{\frac{k}{\rho}} = \sqrt{\frac{2.05 \cdot 10^9}{10^3}} = \underline{1432 \text{ m/s}}$$

Other liquids give figures of the same order.

From 4 $c = \sqrt{\frac{k}{\rho}}$ and substituting in 3 gives:-

$$h = \frac{v}{g} \cdot c$$

In general form:-

$$h = - \frac{c}{g} \Delta v$$

Where h is the increase in pressure associated with the change in velocity Δv .

Substituting in the above equation for the values appropriate to water, show that a reduction of 3m/s corresponds to an increase in head of about 440 m (about 4.3MN/m^2)

Note This equation is independent of the length of the pipe- unlike the equation derived for equation 1.

Case 3 Compressible fluid, Elastic Pipe

May be analysed using strain energy theory,

Kinetic Energy of water before closure = Strain Energy of water + strain energy of pipe after closure

$$\text{K.E. of water} = \frac{1}{2} mv^2 = \frac{1}{2} \rho ALv^2$$

Strain energy of water

and

Strain energy	=	$\frac{1}{2}$ [stress x strain]
Stress	=	water hammer pressure, p
Strain	=	change in volume, $\Delta \text{vol.}$

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

From case 2,
$$\Delta \text{vol} = \frac{pAL}{k}$$

(This was for a rigid pipe, but in a stiff elastic pipe, the increase in diameter of the fluid resulting from an increase in pressure may be neglected.)

$$\therefore \text{S.E of water} = \frac{1}{2} A L \frac{p^2}{k} = (\text{S.E.})_w$$

Strain energy of pipe walls

Stress depends on the method of anchoring the pipe and the material from which the pipe is made.

f_L	=	longitudinal stress
f_c	=	circumferential or hoop stress
E	=	Young's modulus of pipe material
ν	=	Poisson's ratio of pipe material

(Lateral strain = ν x direct strain).

Then:-


Longitudinal strain =
$$\frac{f_L}{E} - \nu \frac{f_c}{E}$$

Circumferential Strain =
$$\frac{f_c}{E} - \nu \frac{f_L}{E}$$

Strain Energy per unit volume of pipe is equal to $\frac{1}{2} \sum (\text{Stress} \times \text{strain})$

\therefore Strain energy of pipe, $(\text{S.E.})_p$

$$= \frac{1}{2} \left[f_L \left(\frac{f_L}{E} - \frac{\nu f_c}{E} \right) + f_c \left(\frac{f_c}{E} - \frac{\nu f_L}{E} \right) \right] \pi d L e$$



In general,

$$(S.E.)_p = \frac{ALp^2}{2E} \cdot \frac{d}{\rho} \cdot C^1$$

Where $C^1 = \text{constant}$, depending on the method of anchorage.

E.g. For a thin walled pipe, with no expansion joints, fixed at one end and free to move longitudinally,

$$C^1 = \frac{5}{4} - \nu$$

For a thin walled pipe, without expansion joints and anchored throughout its length,

$$C^1 = 1 - \nu^2$$

For a thin walled pipe with expansion joint throughout its length,

$$C^1 = 1 - \frac{\nu}{2}$$

Energy Balance

$$K.E. = (S.E.)_w + (S.E.)_p$$

$$\frac{1}{2} \rho AL v^2 = \frac{AL p^2}{2} \left[\frac{1}{k} + \frac{dC^1}{\rho E} \right]$$

Hence

$$p = v \sqrt{\frac{\rho}{\frac{1}{k} + \frac{dC^1}{\rho E}}}$$

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

or

$$h = \frac{v}{g} \sqrt{\frac{1}{\rho \left(\frac{1}{k} + \frac{dC^1}{eE} \right)}}$$

Now the speed of propagation of a wave in an infinite fluid, $c = \frac{p}{\rho v}$, so in this case, where the elasticity of the fluid and pipe are being considered:-

$$c = \sqrt{\frac{1}{\rho \left(\frac{1}{k} + \frac{dC^1}{eE} \right)}}$$

If the longitudinal stress is ignored (usually the case in most water hammer problems, since it only becomes significant when the Young's modulus of the pipe is much smaller than fluid bulk modulus, which may occur with plastic or rubber tubing), then $C^1 = 1$ in the above equations.

Elasticity of Materials used for Pipe Walls:

Materials	Young's Modulus E (10 ⁹ N/m ²)	Poisson's Ratio V
Aluminum	70	0.33
Asbestos – cement	24	-
Brass	100	0.36
Concrete	20	0.1 – 0.3
Copper	120	0.34 - 0.37
Glass	70	-
Cast Iron	100	0.21 - 0.30
Lead	10	0.43
Perspex	6	0.33
Polythene	0.8	0.46

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

Polystyrene	5	0.40
Mild Steel	210	0.28

Bulk Modulus K (N/m²)

Water at 20° C	-	2.1 x 10 ⁹
Oil at 15° C	-	1.5 x 10 ⁹

Problems on Water Hammer

(1) A hydraulic pipeline 3.5 km long and 50cm diameter is used to convey water with a velocity of 1.5 m/s. Determine the rise in pressure head in the pipeline if the valve provided at the outflow end is closed in (i) 20 seconds (ii) 3.5 seconds with rigid pipe (iii) 3.0 sec with elastic pipe of thickness 2.0mm. Given Bulk modulus of water K = 2 GPa, E_{pipe material} = 2.06 × 10¹¹Gpa

Solution: The celerity of wave ‘C’ = $\sqrt{\frac{K}{\rho}} = \sqrt{\frac{2.0 \times 10^9}{1000}} = 1414.21 \text{ m/s}$

Time of oscillation = $\left(\frac{2L}{C}\right) = \left(\frac{2 \times 3500}{1414.21}\right) = 4.95 \text{ sec}$

(i) **Time of closure T_c = 20 sec** > 4.95 sec - Gradual Valve closure

Rise in The pressure Head $H = \frac{LV}{gT_c} = \left(\frac{3500 \times 1.5}{9.81 \times 20}\right) = 26.75 \text{ m of Water Head}$

(ii) **Time of closure T_c = 3.5 sec** < 4.95 sec - Instantaneous Valve closure for a Rigid pipe. The pressure head rise ‘H’ is given by,

$H = \frac{p}{\gamma_w} = \frac{\rho \times V \times C}{\rho \times g} = \frac{V \times C}{9.81} = \frac{1.5 \times 1414.21}{9.81} = 216.2 \text{ m of water head}$

(iii) **Time of closure T_c = 3.0 sec** < 4.95 sec - Instantaneous Valve closure for a Elastic pipe. The pressure rise ‘p’ is given by,

$p = V \sqrt{\frac{\rho}{\left(\frac{1}{K} + \frac{D}{tE}\right)}} = 1.5 \sqrt{\frac{1000}{\left(\frac{1}{2.0 \times 10^9} + \frac{0.5}{0.002 \times 2.06 \times 10^{11}}\right)}} = 1145.87 \text{ kN / m}^2$

Rise in Pressure Head ‘H’ = $\left(\frac{p}{\gamma_w}\right) = \left(\frac{1145.87}{9.81}\right) = 116.8 \text{ m of water Head}$

(2) Water is flowing through a cast-iron pipe of diameter 150 mm and thickness 10 mm which is provided with a valve at its end. Water is suddenly stopped by closing the valve. Find the maximum velocity of water, when the rise of pressure due to sudden valve closure is 1.962 MN/m². Given the value of 'K' for water = 1.962 GN/m² and 'E' for Cast-iron pipe 'E_{C.I}' = 117.7 GN/m²

Solution: Given:

(i) Pressure rise due to sudden valve closure ' p ' = 1.962 MN/m² = 1.962 × 10⁶ N/m²

(ii) K = 1.962 GN/m² = 1.962 × 10⁹ N/m²

(iii) E_{C.I} = 117.7 GN/m² = 117.7 × 10⁹ N/m²

(iv) Thickness of pipe ' t ' = 10 mm = 0.01 m

(v) Diameter of pipe = 150mm = 0.15m

The rise in pressure ' p ' in cast iron pipe by considering pipe as elastic and valve closure is instantaneous is given by,

$$p = V \sqrt{\frac{\rho}{\left(\frac{1}{K} + \frac{D}{tE}\right)}} = V \sqrt{\frac{1000}{\left(\frac{1}{1.962 \times 10^9} + \frac{0.15}{0.01 \times 1.177 \times 10^{11}}\right)}} = 1.962 \times 10^6 \text{ N / m}^2$$

$$1.2528155 \times 10^6 \times V = 1.962 \times 10^6$$

$$V = 1.566 \text{ m/s}$$

Q.3 The velocity of water in a 60cm diameter and 15mm thick cast iron pipe (E=1.04×10¹¹ Pa) is changed from 3 m/s to zero in 1.25 s by closure of a valve i) if the pipe length is 800m what will be the water hammer pressure at the valve? What will be the corresponding pressure rise if the

Dr. Nagaraj Sitaram, Principal & Professor, Amrutha Institute of Engineering & Management, Bidadi, Ramanagar District, Karnataka

closure takes place in; ii) 2s and iii) 0.8s respectively? Bulk module of elasticity of water is $2.11 \times 10^9 \text{ N/m}^2$.

Ans: Given: $D = 60\text{cm} = 0.6\text{m}$, $L = 800\text{m}$, $t = 15\text{mm} = 0.015\text{m}$
 $E = 1.04 \times 10^{11} \text{ Pa}$, $K = 2.11 \times 10^9 \text{ N/m}^2$, $V = 3\text{m/s}$

(i) Case-1 Time of Closure $T_c = 1.25 \text{ sec}$

The celerity of wave $C = \sqrt{\frac{K}{\rho}} = \sqrt{\frac{2.11 \times 10^9}{1000}} = 1452.6 \text{ m/s}$

The ratio $\left(\frac{2 \times L}{C} = \frac{2 \times 800}{1452.6} = 1.1 \text{ sec}\right)$

The value of Time of Closure $T_c = 1.25 \text{ sec} > 1.1 \text{ sec}$

Hence GRADUAL CLOSURE OF VALVE

The value of **pressure rise** in pipeline due to **gradual closure** is given by,

$$p = \left(\frac{\rho \times L \times V}{T_c}\right) = \left(\frac{1000 \times 800 \times 3}{1.25}\right) = 1920 \text{ kPa}$$

(ii) Case-2 Time of Closure $T_c = 2 \text{ sec}$

The value of Time of Closure $T_c = 2 \text{ sec} > 1.1 \text{ sec}$

Hence GRADUAL CLOSURE OF VALVE

The value of **pressure rise** in pipeline due to **gradual closure** is given by,

$$p = \left(\frac{\rho \times L \times V}{T_c}\right) = \left(\frac{1000 \times 800 \times 3}{2}\right) = 1200 \text{ kPa}$$

(iii) Case-3 Time of Closure $T_c = 0.8 \text{ sec}$

The value of Time of Closure $T_c = 0.8 \text{ sec} < 1.1 \text{ sec}$

Hence INSTANTANEOUS CLOSURE OF VALVE

The value of **pressure rise** in pipeline due to **instantaneous closure** is given by,

$$p = V \sqrt{\frac{\rho}{\left(\frac{1}{k} + \frac{D}{t \times E}\right)}} = 3 \sqrt{\frac{1000}{\left(\frac{1}{2.11 \times 10^9} + \frac{0.6}{0.015 \times 1.04 \times 10^{11}}\right)}} = 3238 \text{ kPa}$$